



PROFESSION Allogue 2024 / 26 Len



SINGING ROCK COMPANY

We are climbers who work for climbers

We put not only our experience, but also our enthusiasm into our professional equipment. We proudly do it in Czechia.

We are here for those who want to see the vertical world as it is, without pretence and unrealistic ballast. We do not embellish or hide anything.

We respect the purity of of work at height and that's how we approach our products.



We offer solutions

Climbers for climbers

and we talk to them accordingly. We make our professional equipment as if we were making it for ourselves.

We understand the world of our customers

We always look for an ideal and complex solution of a product, situation or communication, so that our customers are satisfied.



SINGING ROCK VALUES

We are climbers who work for climbers

Pure experience

It is a part of our products and manner of communication. We share it with every interaction.





Functionality The value of real workers at height who don't need fancy and glitz. They are self-confident and rely on the equipment they use.





MISSION

We make products for your vertical world.

We bring simplicity, authenticity and fair behaviour to climbing and working at heights.





MILESTONES



read more about our history From **TUCAN** to **SINGING ROCK**. From "**Tatrman**" to the "**Arrow**". From one sewing machine and 40 m2 of a workshop at home to three manufacturing plants and more than 170 employees. These and more are the milestones of SINGING ROCK.

1992	1995	2000	2001	2003
Foundation of SINGING ROCK by two professional climbers	SINGING ROCK enters the work at height segment, complementing its outdoor climbing business	QMS certification according to ISO 9001 (and Art. 11B of Council Directive 89/686/EEC) Investment into own factory in Poniklá	Redesign corporate image Launch of in-house developed dynamic and static ropes	Launch of own designed line of carabiners and other hardware
2005	2008	2009	2011	2013
Introduction of POLYGONbrand and opening of the first centerin Poniklá	Acquisition of	Merger with LANEX Investment in a second training center in Kladno Acquisition of new production space for textile production in Semily	CRAVELTIK Acquisition of Raveltik, incorporating capabilities in the hardware segment and expanded coverage of the mountaineering and ice climbing segments	POLYGON's training centers in Poniklá and Kladno become certified by IRATA Spin-off from LANEX and reorganization as an independent entity
2015	2017	2019	2020	2022
ARX Private Equity Partners sold 100% share in SINGING ROCH to Mr. Rudolf Bochenek with a majority share and Rudolf Gregořica as minority partner		ořica Partner franchise system		30th Anniversary

PRODUCTION & QUALITY CONTROL

Although we are open to the world, the heart of SINGING ROCK beats in the Czech Republic. The headquarter, production, training and testing centre is located in Poniklá. Our textile production plant is situated in Semily. The production of metal products and components is placed in Sudkov. The Kladno training centre for work at height is just 20 min from Prague. Four locations in the Czech Republic, including three manufacturing plants and two training centres bring you the equipment and services for your vertical playground.



DISTRIBUTION

Singing Rock supplies products to more than 65 countries worldwide, through its network of distributors and agents. Thanks to them, you can find us wherever they understand climbing and working at heights.



DISTRIBUTION

KNOWLEDGE & EXPERIENCE

Meeting minimum requirements is obvious. We go further by performing the tests to simulate all kind of usage as the basis for our further development. In our laboratory we can test our products on several testing machines f.e. a helmet testing machine or cycling hydraulic machine for fatigue tests of movable components and elastic webbings. Laboratory tests are, of course, complemented by testing and validation in the real environment.



RESEARCH & DEVELOPMENT

For more than 30 years, SINGING ROCK has built on its experience and knowledge in designing and manufacturing products for your vertical world. Developing our products requires expertise in a wide range of different materials and manufacturing technologies. Modern tools help our development team to create products to your and our satisfaction.



EFFICIENCY


We run lean management system with horizontal organisation structure. Thanks to this structure we are able to react immediately and customize our products and service for your specific needs.



SUSTAINABILITY

We bear the responsibility to keep our planet green and to preserve its riches for our kids. Singing Rock is supporting by its membership in the European Outdoor Conservaton Association environmental activities all around the world.



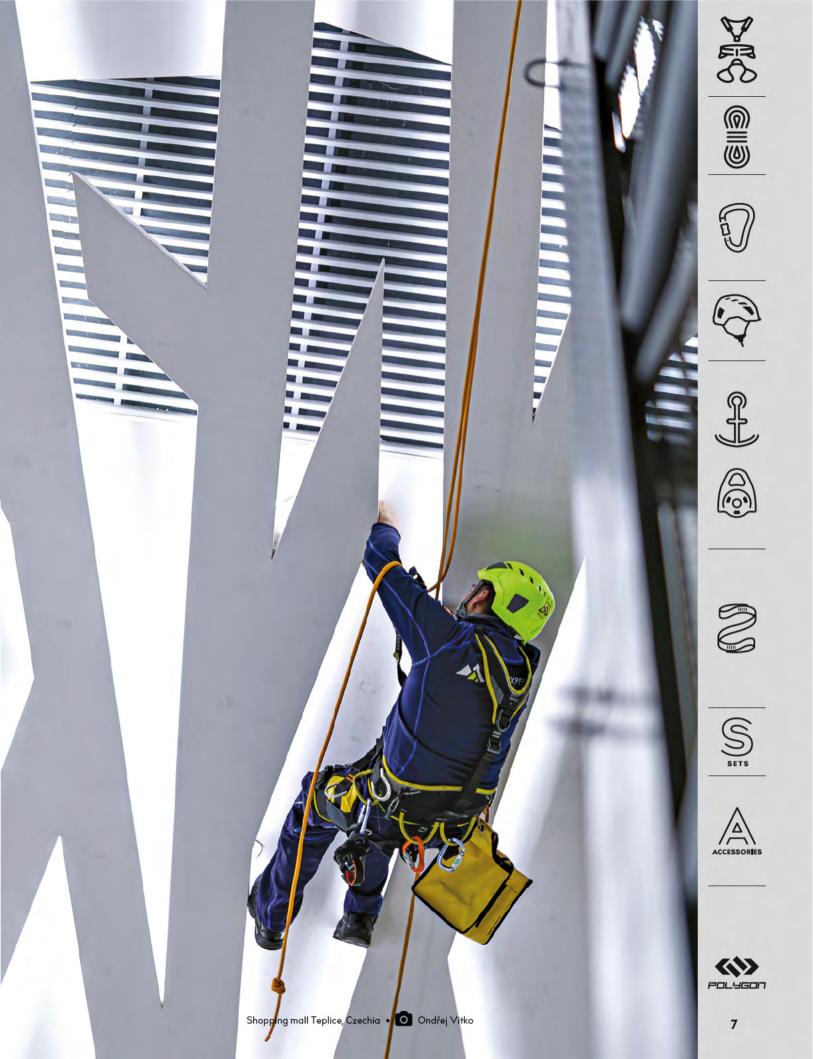



-



MMaoo

Ast. K.S.Lun.



HARNESSEG

ROPE ACCESS FALL ARREST FULL BODY CHEST SIT HARNESSES ARBORICULTURE RESCUE ACCESSORIES







SPEED BUCKLE

Fast donning and adjustment

Singing Rock SPEED buckle is the side quick release buckle for easy operation with the harness. SPEED buckle enable fluent and fast adjustment to fit a user's body. The buckle is very durable, made of steel and matches the strict American standard ANSI. The buckle is impossible to open under the loading, also is impossible to lock when the webbing is twisted. Comes in two sizes with a strength 18 kN.



EASY-LOCK BUCKLE

Unique buckle with a sliding captive bar matches strict American standards (ANSI, CSA). Its minimum strength is 17.2 kN. No webbing slippage in a buckle. Its construction ensures longtime operation and efficiency (easy releasing and fastening even when dirty and tough webbing). Corrosion resistance is tested by spraying in a salty chamber for a period of 48 hours.



ROCK & LOCK


patented smart buckle system

Easy to lock and open: Only a small amount of finger pressure is needed to lock and to open.

- Fast lace-through: Make the loop, put it through the buckle frame, hook the loop on the cross bar and tighten. It's as easy as that.
- Smart function: Rock&Lock allows you to put on your harness very quickly
- Double safety: Webbing cannot slip through Rock&Lock due to a safety loop at the end of the webbing Spontaneous opening of Rock&Lock is virtually impossible.
- Lightweight and extra strong.
- Excellent operation in all-season conditions: Operation guaranteed even when webbing is wet or frozen.



Homesses

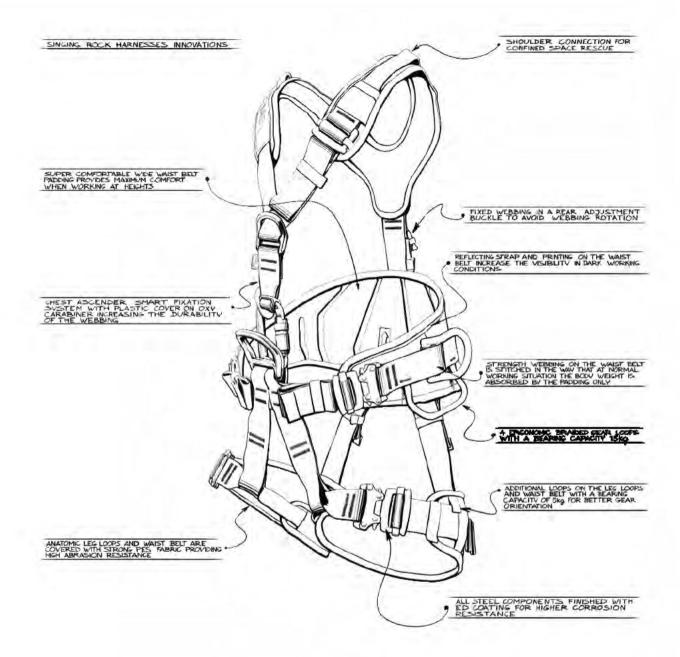

These icons will help you to choose the proper harness regarding the most common and most suitable use:



















rope acces

rescue

work

work restraint

fall arrest

intervention

rope park

tree core

11

black version - W0079DB

W0079DR

EXPERT 3D / SPEED







Fully adjustable harness for a rope access with wide padded waist belt, leg loops and shoulder straps. Suitable also for work positioning, fall arrest and work restraint situations.

- shoulder straps can be totally removed and the harness can be used as a sit harness only
- super comfortable wide waist belt padding provides maximum comfort when working at height
- strength webbing on the waist belt is stitched in the way that at normal working situation the body weight is absorbed by the padding only
- reflective strap and printing on the waist belt and shoulder padding increase the visibility in dark working conditions
- anatomic leg loops and waist belt are covered with strong PES fabric providing high abrasion resistance
- SPEED buckles enable fluent and fast adjustment to fit a user's body
- OXY triple lock carabiner used for connection of shoulder straps to the main point to increase the space for chest ascender attachment
- chest ascender smart fixation system with plastic cover on the OXY carabiner increasing the durability of the webbing
- shoulders straps and leg loops are independently adjustable
- narrowed padding and webbing on the shoulder straps in a neck area enhance a comfortable work
- front and back attachment points for fall-arrest according to EN 361 marked with additional "A" marking
- rear lower attachment point according to EN 813
- flat rear attachment point does not bear on users back when carrying backpack or breathing apparatus
- front lower attachment point for descender placement or work positioning according to EN 813, EN 358
- 2 side attachment points for work positioning according to EN 358
- heavier items up to 35 kg can be attached to the webbing on the waist belt
- all steel components finished with E coating for higher corrosion resistance
- 4 ergonomic braided gear loops with a bearing capacity 15 kg
- additional loops on the waist belt and leg loops with a bearing capacity of 5 kg offer additional space for the gear and better gear orientation
- wide elastic band on left shoulder strap for the gear attachment (f.e. transmitter)
- · slots on the waist belt for PORTER tool holder to carry your industrial tools

Size: S, M/L, XL Weight: (M/L) 2415 g+ 85.19 oz Max. rated load: 150 kg <€1019 • EN 358 • EN 813 • EN 361 • EN 1497





black version – W0078DB

W0078DR

EXPERT 3D / STANDARD



- standard easy-lock buckles enable smooth adjustment
- super comfortable wide waist belt padding provides maximum comfort even during prolonged suspension

Size: S, M/L, XL Weight: (M/L) 2110 g •74.43 oz Max. rated load: 150 kg C € 1019 • EN 358 • EN 813 • EN 361 • EN 1497





EXPERT 3D / SPEED STEEL

W0080DR



The variant of EXPERT 3D harness according to the North American standards ANSI and NFPA with SPEED buckles, metal elements made of steel, fall indicators and lanyard keepers.

- harness certified according to the newest North American standards ANSI Z359.11-2014 and NFPA 1983 Class III
- ergonomic and removable lanyard keepers on the shoulder straps allow user to store lanyard connectors when not in use - in the event of a fall, the connector is released so that the shock absorber can be safely deployed
- for easier inspection, the harness is equipped with fall indicators placed close to dorsal attachment point which are activated in case of a fall red label indicates that the harness must be retired

Size: S, M/L, XL Weight: (M/L) 2830g • 99.83 oz Max. rated load: 150 kg (140 kg/310 lbs according to ANSI) ANSI Z359.11-2014 • NFPA 1983 Class III • C€ 1019 • EN 358 • EN 813 • EN 361 • EN 1497







PROFI WORKER 3D / SPEED







Fully adjustable harness for a rope access with wide padded waist belt, leg loops and shoulder straps. Suitable also for work positioning, fall arrest and work restraint situation.

- super comfortable wide waist belt padding provides maximum comfort when working at height
- strap that connects the legs loops and shoulders at the back passes freely through the waist belt, which brings increased mobility
- strength webbing on the waist belt is stitched in the way that at normal working situation the body weight is absorbed by the padding only
- reflective strap and printing on the waist belt and shoulder padding increase the visibility in dark working conditions
- anatomic leg loops and waist belt are covered with strong PES fabric providing high abrasion resistance
- SPEED buckles enable fluent and fast adjustment to fit a user's body
- narrowed padding and webbing on the shoulder straps in a neck area enhance a comfortable work
- leg loops connection straps made from durable PES webbing for better abrasion
 resistance
- front and back attachment points for fall-arrest according to EN 361 marked with additional "A" marking
- rear lower attachment point according to EN 813
- flat rear attachment point does not bear on users back when carrying backpack or breathing apparatus
- front lower attachment point for descender placement or work positioning according to EN 813, EN 358
- 2 side attachment points for work positioning according to EN 358
- heavier items up to 35 kg can be attached to the webbing on the waist belt
- 4 ergonomic braided gear loops with a bearing capacity 15 kg
- additional loops on the waist belt and leg loops with a bearing capacity of 5 kg offer additional space for the gear and better gear orientation
- wide elastic band on left shoulder strap for the gear attachment (f.e. transmitter)
- slots on the waist belt for PORTER tool holder to carry your industrial tools

Size: S, M/L, XL • Weight: (M/L) 2075 g • 73.19 oz Max. rated load: 150 kg C€ 1019 • EN 358 • EN 813 • EN 361 • EN 1497







PROFI WORKER 3D / STANDARD

W0081DR black version – W0081DB




Fully adjustable harness for a rope access with wide padded waist belt, leg loops and shoulder straps. Also suitable for work positioning, descent, ascent and rescue situations

- standard easy-lock buckles enable smooth adjustment
- super comfortable wide waist belt padding provides maximum comfort even during prolonged suspension

Size: S, M/L, XL • Weight: (M/L) 1777 g • 62.68 oz Max. rated load: 150 kg C€1019 • EN 358 • EN 813 • EN 361 • EN 1497





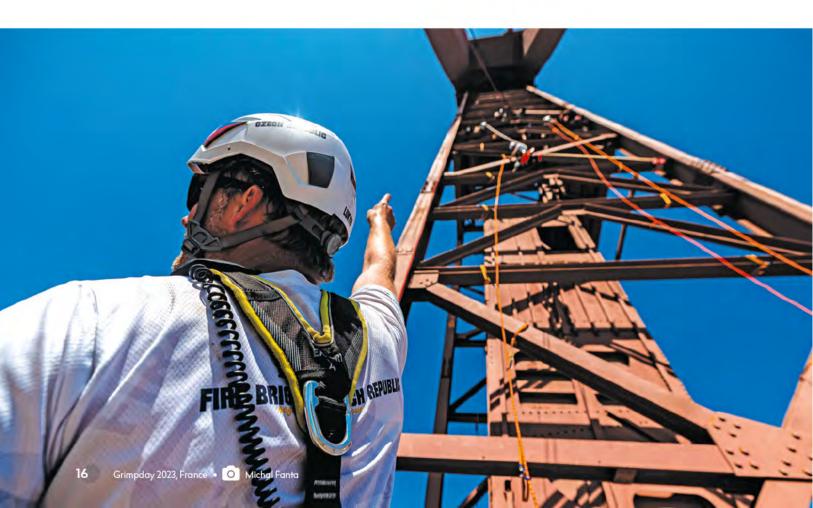

STANDARD - W0063BB

SPEED - W0064BB

TECHNIC



TECHNIC STANDARD

TECHNIC SPEED

Fully adjustable full body harness for rope access, work positioning and fall arrest with Easy-Lock or SPEED buckles and steel components.

- front large attachment point for attaching descender or work positioning devices (EN 813, EN 358)
- steel side positioning points according to EN 358 with position adjustment are placed symmetrically and do not interfere at work
- front and rear attachment points for fall arrest (EN 361)
- rear attachment point does not interfere with carrying a backpack or breathing apparatus
- attachment of the CAM CLEAN chest ascender by a mailon and the CAM CLEAN strap
- 2 braided gear loops with a bearing capacity of 5 kg
- additional slots on the waist belt allow you to safely hang expensive equipment (chainsaw, drill...)
- the corrosion resistance of the steel components is tested by spraying in a salt chamber for 48 hours

Size: S, M/L, XL Weight: (M/L) 2045 g • 72 oz Max. rated load: 150 kg C€ 1019 • EN 358 • EN 813 • EN 361



TECHNIC ANSI

STANDARD - W0103BB SPEED - W0104BB



TECHNIC STANDARD ANSI

TECHNIC SPEED ANSI

Fully adjustable full body harness for rope access, work positioning and fall arrest with SPEED buckles, steel components, fall indicator and connector keepers.

- harness is certified to the latest American Standards ANSI Z359.11-2021 and NFPA 1983 Class III
- ergonomic and removable BIG/GIGA connector keepers on the shoulder straps allow you to store the fall arrest connectors when not in use. In case of a fall, the loops will release to allow the shock absorber can be safely deployed.
- for easy inspection, the harness is equipped with a fall indicator in the area of the back attachment point which is activated as a result of a fall, a red label indicates the harness must be retired
- front large attachment point for attaching descender or work positioning devices (EN 813, EN 358)
- steel side positioning points according to EN 358 with position adjustment are placed symmetrically and do not interfere at work
- front and rear attachment points for fall arrest (EN 361)
- attachment of the CAM CLEAN chest ascender by a mailon and the CAM CLEAN strap
- SPEED buckles allow smooth and quick donning and adjustment of the harness with maximum comfort
- the corrosion resistance of the steel components is tested by spraying in a salt chamber for 48 hours
- 2 braided gear loops with a bearing capacity of 5 kg
- additional slots on the waist belt allow you to safely hang expensive equipment

Size: S, M/L, XL

Weight: (M/L) 2085 g • 73.55 oz Max. rated load: 150 kg (140 kg/310 lbs according ANSI) ANSI Z359.11-2021 • NFPA 1983 Class III • €€1019 • EN 358 • EN 813 • EN 361



W0112BY

WIND MASTER

NEW





Work harness that you can use not only for the maintenance of wind turbines. It is also suitable for work at height and service activities in telecommunications or the construction industry. WIND MASTER has a lot of features, but its main extras are the waist belt with the plastic back cover equipped with the durable glides and the front EN 361 LADDER CONNECTION POINT.

- harness is equipped with classic EN 361 front and rear attachment points for fall arrest; the rear point is recessed into the padding so it does not impede movement in confined spaces when not in use
- in addition, there is the specific EN 361 LADDER CONNECTION POINT on the front under the chest for connection to EN 353-1 fall arrest systems, which allows freer movement on secured ladders and structures
- if a fall is caught by the LADDER CONNECTION POINT, the auxiliary seams are ripped out and the point changes its position so that the user is not in danger of being turned head down
- wide waist belt with the plastic back cover equipped with the durable glides ensures comfortable movement and rest on fall arrest systems even in confined spaces
- shoulders have removable loops in the front for parking shock absorber hooks when they
 are not in use; under heavier loads, the loop is released so that a shock absorber can be
 safely deployed in the event of a fall
- upper parts of the shoulders have EN 1497 textile loops for pulling the user out in case of rescue from a confined space
- EN 813/EN 358 front attachment point located in the front serves for resting, lowering and work positioning
- additional work positioning options are offered by the two EN 358 swing-out attachment points on the sides of the waist belt
- SPEED buckles on the leg loops and at the waist ensure smooth and quick putting on of the harness, leaving more time for efficient work
- padding on the leg loops and shoulder straps evenly distributes the user's weight and thus
 reduces strain and fatigue
- waist belt is equipped with two standard textile loops with a load capacity of 5 kg, so the necessary equipment is always at hand
- steel buckles are E-coated for increased corrosion resistance in wet and salty environments
- using an additional carabiner, the CAM CLEAN chest ascender can be attached to the harness
- whether you're an experienced wind power technician or a newcomer to the industry, WIND MASTER guarantees you first-class comfort and functionality

Size: S, M/L, XL Weight: 2400 g (M/L) • 85 oz (M/L) Max. rated load: 150 kg C€1019 • EN 358 • EN 813 • EN 361 • EN 1497







W0091BY

ROOF MASTER





You want freedom of movement when working on the roof, and the ROOF MASTER harness with its many features and unique Singing Rock MOTION SYSTEM guarantees it. Its movable attachment point is openable, which makes it easy to connect a chest ascender or detach the shoulder straps. So, you can choose between a full-body and a sit harness, it's up to you.

- Singing Rock MOTION SYSTEM guarantees freedom of movement without being restricted by a working rope or a fall arrest system
- in the front, part of the MOTION SYSTEM is the light alloy RINGO ring which forms a movable attachment point and a flexible connection between the waist belt and shoulder straps
- RINGO ring is openable, which allows easy attachment of the CAM CLEAN chest ascender or detachment of the shoulder straps and conversion of the full-body harness into the sit harness
- on the back of the harness, the MOTION SYSTEM consists of a classic light alloy ring that works as a flexible connection between the dorsal strap and the back of the waist belt
- this rear light alloy ring is equipped with a grey textile loop with a capacity of 100 kg for heavier work tools
- in the back of the shoulder straps there is a red EN 361 textile attachment point for fall arrest
- front EN 361 fall arrest point (the red light alloy D-ring) is positioned lower than usual and takes full advantages of the front part of the MOTION SYSTEM
- MOTION SYSTEM allows to use this point also for work positioning without restricting the user's movement or work - thus one point serves both for fall arrest and positioning at the same time
- red D-ring can also be used as EN 813 because it functions as an extension of the front attachment point
- SPEED buckles on the leg loops and on the left side of the waist belt ensure easy adjustment and comfortable putting on of the harness
- side textile EN 358 loops for work positioning are highlighted with red stitching and designed to prevent accidental catching during work
- 3D waist belt is equipped with a rubberized strength fabric with a number of attachment holes - you can thread an auxiliary cord through the holes to create additional loops or you can clip auxiliary carabiners into the holes to connect a tool bag (each hole has a bearing capacity of 10 kg)
- waist belt is also equipped with two standard textile loops with a bearing capacity of 5 kg
- ring-shaped leg loops are lightweight, yet very comfortable, their size can be easily adjusted with SPEED buckles, they are connected to the waist belt at the back by adjustable elastic straps
- neoprene pocket on the right leg loop is suitable for small items
- reflective printing on the waist belt increases the visibility of the harness
- identification label on the back of the shoulder straps ensures that you can always find yours in a pile of harnesses

Weight: (M/L) 1830 g • 64.55 oz Max. rated load: 150 kg Size: S, M/L, XL C€ 1019 • EN 358 • EN 813 • EN 361







TACTIC MASTER





Lightweight and fully adjustable fullbody safety harness intended mainly for special forces featuring the MOLLE system and a possibility to wear the harness above the bullet-proof vest. The unique Singing Rock MOTION SYSTEM with the openable RINGO O-ring gives the user freedom of movement without being restricted by a working rope or a fall arrest system. An ideal solution for working at heights where the precise positioning and free movement are important.

- frontal textile A point according to EN 361 is vertically adjustable, allowing to use the same harness with and without the bullet-proof vest
- abseil rope clipped through a connector, attached to A point, can help the user to stay in an upright position even with a heavy load on the back
- part of the EN 813 MOTION SYSTEM is the openable RINGO O-ring, which allows the user to disconnect the chest part and leg loops or put the chest ascender along with other devices directly to RINGO
- shoulder straps and leg loops are fully removable, the harness can be used as a sit harness or positioning (tactical) belt only
- textile loops for work positioning according to EN 358 designed in a way that prevents accidental capture during a work
- during the fall arrest to the dorsal textile attachment point EN 361, the MOTION SYSTEM efficiently splits the energy of the fall to the harness
- harness can be easily supplemented with the CAM CLEAN chest ascender
- shoulder connection for confined space rescue
- MOLLE system on the waist belt, leg loops and right shoulder strap to attach the pouch
 or other gear
- speed buckles for quick and easy put on /off
- rear light alloy ring is equipped with grey textile loop for heavier tools with a load capacity 100 kg

Size: S, M/L, XL Weight: (M/L) 1740 g • 61.38 oz Max. rated load: 150 kg C€ 1019 • EN 358 • EN 813 • EN 361 • EN 1497





W0096BB

W0074DR

Harnesses

SEAMASTER 3D STAINLESS STEEL



Fully adjustable harness for rope access with a padded wide waist belt, leg loops and shoulder straps. Suitable for work positioning, fall arrest and work restraint situations.

This harness is specially intended for workers at offshore oil platforms.

- stainless steel components make the harness ultimate choice for offshore operations
- padded waist belt, shoulder straps and leg loops
- wide waist belt provides maximum comfort when working at height
- narrowed padding and webbing on the shoulder straps in a neck area enhance comfortable work
- reflective printing on the waist belt increases the visibility in dark working conditions
- front attachment point for fall-arrest according to EN 361
- front lower attachment point for descender placement or work positioning according to EN 813
- side attachment points for work positioning according to EN 358
- 3 braided gear loops with a bearing capacity of 5 kg

- heavier items up to 35 kg can be attached to the webbing on the waist belt
- additional loops with a bearing capacity of 5 kg offer additional space for the gear and better gear orientation
- combination of standard and SPEED buckles enable fluent and fast adjustment to fit the users body
- special construction of central loop provides excellent comfort when hanging in the harness
- easy fixing CAM CLEAN ascender in vertical position is provided by stitched strap between lower front attachment point and front tie-in point
- different color webbing stitched in the buckle simplifies adjusting and size selection

Weight: (M/L) 1870 g • 66 oz Max. rated load: 150 kg Size: S, M/L, XL C€1019 • EN 361 • EN 358 • EN 813



W0086B0

ANTISHOCK I



Full body harness for rope access, work positioning, fall arrest. The Antishock I is the perfect solution for work at height in explosive atmospheres. It is particularly suitable for energetics, petrochemical and mining environments.

- all metal and alloy parts are overmolded with colored plastic with an electrical puncture resistance of 10 kV and antistatic finishing
- harness certified according to the newest North American standards ANSI Z359.11-2014 and NFPA 1983 Class II
- ergonomic and removable lanyard keepers on the shoulder straps allow user to store lanyard connectors when not in use - in the event of a fall, the connector is released so that the shock absorber can be safely deployed
- for easier inspection, the harness is equipped with fall indicators placed close to dorsal attachment point which are activated in case of a fall – red label indicates that the harness must be retired
- shoulder attachment points for confined space rescue according to EN 1497 2

- side attachment points for work positioning according to EN 358
- front lower attachment point for descender placement or work positioning according to EN 813
- narrowed padding and webbing on the shoulder straps in a neck area enhance a comfortable work
- chest ascender smart fixation system
- chest ascender maillon slot (recommended maillon big D, EN 362)
- 2 large braided gear loops with a bearing capacity of 5 kg
- name tag for easier recognition of the harness

Size: S, M/L, XL

Weight: (M/L) 2430 g • 85.72 oz Max. rated load: 150 kg (140 kg/310 lbs according to ANSI) ANSI Z359.11-2014 • NFPA 1983 Class III • C€ 1019 • EN 358 • EN 813 • EN 361 • EN 1497



W0059BR

TARZAN ECONOMIC



Fully adjustable full body harness intended for rope courses and adventure parks.

- front attachment point for belaying and rappeling according to EN 12277 type C
- waist belt and leg loops without the padding enables to put a harness to every person
- rear steel D-ring with a bearing capacity of 15 kN according EN 361
- shoulder straps, waist belt and leg loops are easily adjustable with Easy Lock buckles
- all steel components are finished with E coating technology for higher corrosion resistance
- left leg loop with red colour helps to put the harness on
- webbing strap stitched in the buckle simplify handling with a buckle
- dorsal plastic plate with different color according the size of the harness (S – yellow, UNI – red)

Size: S (110 – 150 cm), UNI (150 – 200 cm) Weight: 1050 g • 34 oz (UNI) C€1019 • EN 12277 • EN 361

-9-



WUU8/BY

ROPEDANCER II



Fully adjustable full body harness with various attachment points intended for rope courses and adventure parks

- easy to put on and off,
- easy to adjust, thanks to 5 double buckles and 1 SPEED buckle
- bright color font lower attachment point for rappelling and belaying •waist belt in different (black) color for better orientation within the harness
- front and rear attachment points
- 2 gear loops with a bearing capacity of 5 kg
- max. rated load of the harness 150 kg
- different color of the rear triangle for each size
- suitable also for working at height

Weight: (S/M/L) 1195g • 42.15 oz c € 1019 • EN 12277





FALL ARREST

W0068BR black version – W0068BB

BODY II STANDARD



BODY II SPEED

Fully adjustable fall-arrest harness with various attachment points.

- two fall-arrest attachment points according to EN 361
- harness is compact and light-weight, thus suitable for horizontal or inclined space. It also allows temporary hanging in.
- intended for working in places with the risk of fall
- flat rear attachment point does not affect comfort when wearing the backpack or breathing apparatus
- shoulder and leg loops webbings are colour distinguished for easy manipulation
- webbing stitched in the buckle simplify handling
- two gear loops with max. load 5 kg
- easy to adjust, easy to put on and off
- suitable also for rope courses and adventure parks
- different colour of rear triangle for each size (S/M/L- grey, XL/XXL- yellow)
- 2 sizes fit whole size range from 150 to 210 cm

Size: S/M/L, XL/XXL, XXXL Weight: 1025 g • 36.16 oz (size S/M/L) C€1019 • EN 361





W0071BY black version – W0071BB



Fully adjustable fall-arrest harness with various attachment points.

- version with Speed buckles on the leg loops enables easy putting the harness on
- easy to adjust, easy to put on and off
- webbing stitched in the buckle simplify handling

Size: S/M/L, XL/XXL, XXXL Weight: 1185 g • 41.8 oz (size S/M/L) C€ 1019 • EN 361





W0093SY

BODY II ENERGY SPEED




Fully adjustable work-positioning harness with various attachment points, speed buckles and comfortable padding.

- suitable for working situations whith maximum freedom of movement during work positioning
- stitched waist belt padding allows horizontal or vertical movement of the padding thus providing maximum comfort during a work.
- side attachment points for work positioning according EN 358
- front and rear attachment points according EN 361 marked with "A" label
- removable and washable shoulder and leg loops padding provides great comfort
- shoulder padding with reflective straps and integrated loops for hooks storage
- webbing stitched in the buckles simplify handling
- two gear loops with max. load 5 kg
- 4 additional plastic hooks for light gear attachment
- 3 sizes fit whole size range from 150 to 210 cm

Size: S/M/L, XL/XXL, XXXL Weight: 2250 g • 79.44 oz (size S/M/L) C€ 1019 • EN 361 • EN 358





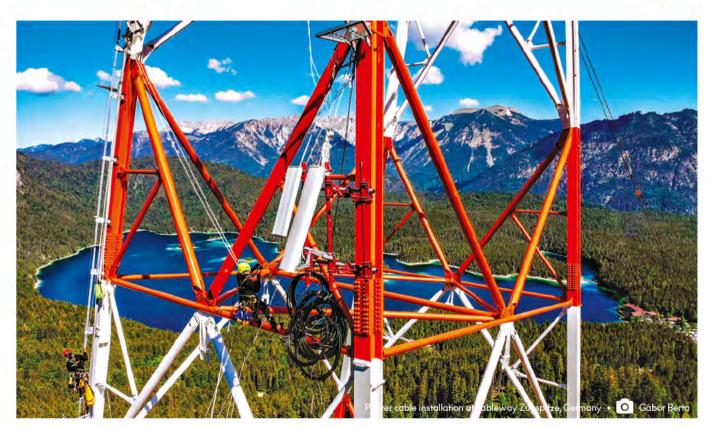

BASIC LIGHT



Fully adjustable fall-arrest harness with a rear dorsal attachment point.

- dorsal rear D-ring attachment point according to EN 361
- one gear loop with max load of 5 kg
 easy to adjust thanks to 4 easy-lock buckles, easy to put on and off
- different color of the rear webbing for each size (S/M/L grey, XL/XXL yellow)
- all steel components finished with E-coating for higher corrosion resistance
- 2 sizes fit whole size range from 150 to 210 cm
- suitable for use with a range of accessories like Pole, Harness Padding, Suspension Trauma Safety Strap

Size: S/M/L, XL/XXL Weight: 760g • 26.81 oz / 810g • 28.5 oz C € 1019 • EN 361





BASIC



Fully adjustable fall-arrest harness with rear dorsal and front sternum attachment points.

- dorsal rear D-ring and front textile twin loops attachment points according to EN 361
- one gear loop with max load of 5 kg
- easy to adjust thanks to 4 easy-lock buckles, easy to put on and off
- different color of the rear webbing for each size (S/M/L grey, XL/XXL yellow)
- all steel components finished with E-coating for higher corrosion resistance
- 2 sizes fit whole size range from 150 to 210 cm
- suitable for use with a range of accessories like Pole, Harness Padding, Suspension Trauma Safety Strap

Size: S/M/L, XL/XXL Weight: Weight: 820 g • 29 oz / 885 g • 31 oz C € 1019 • EN 361





W0090SY

W0089SY

FAVORABLE COMBINATIONS

Singing Rock also offers favorable combinations of the fall-arrest harnesses and range of accessories:

	Xer		X
Harness / Accessory	w/ Podding	w/Pole II	w/ Padding and Pole II
Bosic Light	M0023DX	M0023PX	M0023XX
Basic	M0024DX	M0024PX	M0024PX
Body II standard	M0025DX	M0025PX	M0025XX
Body II speed	M0026DX	M0026PX	M0026XX

POLE II



Belt for work positioning and prevention against the falls from a height.

- anatomic padded waist belt ensures minimal bruising and enough comfort in the waist area
- two side "D" ring for work positioning according to EN 358, tested for 15 kN strength
- two braided gear loops with a bearing capacity of 5 kg
- slots designed for a secure hanging of expensive equipment (such as power saw, drilling machine,...) with a capacity of 1 kN
- speed buckles allow easy manipulation when dressing up and undressing

Recommended use:

• for work positioning and prevention of falls from a height

W0073

 possible combination with fullbody fall-arrest harness BODY II

Size: S/M/L, XL/XXL, XXXL Weight: (S/M/L) 575 g • 20.3 oz C€ 1019 • EN 358



W0092BB

HARNESS PADDING



Removable shoulder and leg padding intended for Body II, Basic and Basic Light harnesses.

- durable and soft material spreads the tension to a bigger surface to increase the comfort of wearing the harness
- reduces the effects of suspension trauma after a fall
- integrated loops on shoulder padding for hooks storage
- removable and washable padding

Size: S/M/L, XL/XXL Weight: 236g • 8.33 oz (S/M/L)



TECHNIC PADDING

W0097BB00



Removable shoulder padding for TECHNIC harnesses

- durable and soft material spreads the tension to a bigger surface to increase the comfort of wearing the harness
- integrated loops for hooks storage
- removable and washable

Size: UNI Weight: 100 g (3.5 oz)



Extremely light and durable sling intended mainly for connection between rear dorsal attachment point and self-retractable lifelines.

- allows an easy self-connection to the rear EN 361 D-ring
- made out of dyneema
- 15 cm and 5 cm long loops are on both ends of a sling
- big loop is overturned to make a Girth Hitch knot over a D ring

Length: 80 cm Width: 13 mm Weight: 40 g • 1.41 oz C€ 1019 • EN 354



Tangin

W2020X080

W9804YX

REFLECT VEST



Fluorescent-colored vest with reflective strips certified accorsding to EN ISO 20471:2013. Suitable for all Singing Rock fall arrest harnesses with or without padding which can also be equipped with the Pole II positioning belt.

- Öko-Tex[®] certified 240 g/m² fabrics made of PES and cotton combination for improved comfort of the user
- stitched retroreflective stripes with microscopic glass beads
- reinforced holes with hook-and-loop fixation of straps, positioning attachment points and gear loops
- size adjustment system using hook-and--loop fixation on a flap
- fits to Basic Light, Basic, Body II, Body II Energy harnesses with or without attached padding and the Pole II positioning belt
- fulfils the requirements of EN ISO 13688:2013 Protective clothing and EN ISO 20471:2013 High visibility clothing

 Material: cotton, PES, glassWeight: 375 g 13.23 ozSize: S/M/L, XL/XXL, XXXL EN ISO 20471:2013 · EN ISO 13688:2013



W0102YB00



HOOK PARKING LOOP

Removable connector keepers for accommodating shock absorber lanyards on shoulder straps of a full-body harness.

- in case of a fall, a parked connector is released so that a shock absorber can be safely deployed
- suitable for most of Singing Rock full-body harnesses
- marking according to ANSI Z359.11-2014
- loop is reinforced with a plastic cover
- attachment using velcro
- sold as 2 pcs.

Weight: 14g • 0.5 oz (a piece)



SUSPENSION TRAUMA SAFETY STRAP






Auxiliary sling preventing effects of suspension trauma after a fall.

- helps to relieve pressure in the groin area while a worker is awaiting rescue
- easy to attach to a harness using a girth hitch and velcro strap
- plastic cover increases resistance during normal working activities
- patented Rock&Lock buckle ensures easy length adjustment
- colored stepping loop ٠
- suitable for Body II, Basic and Basic Light • harnesses

Weight: 63g • 2.2 oz Material: polyamide

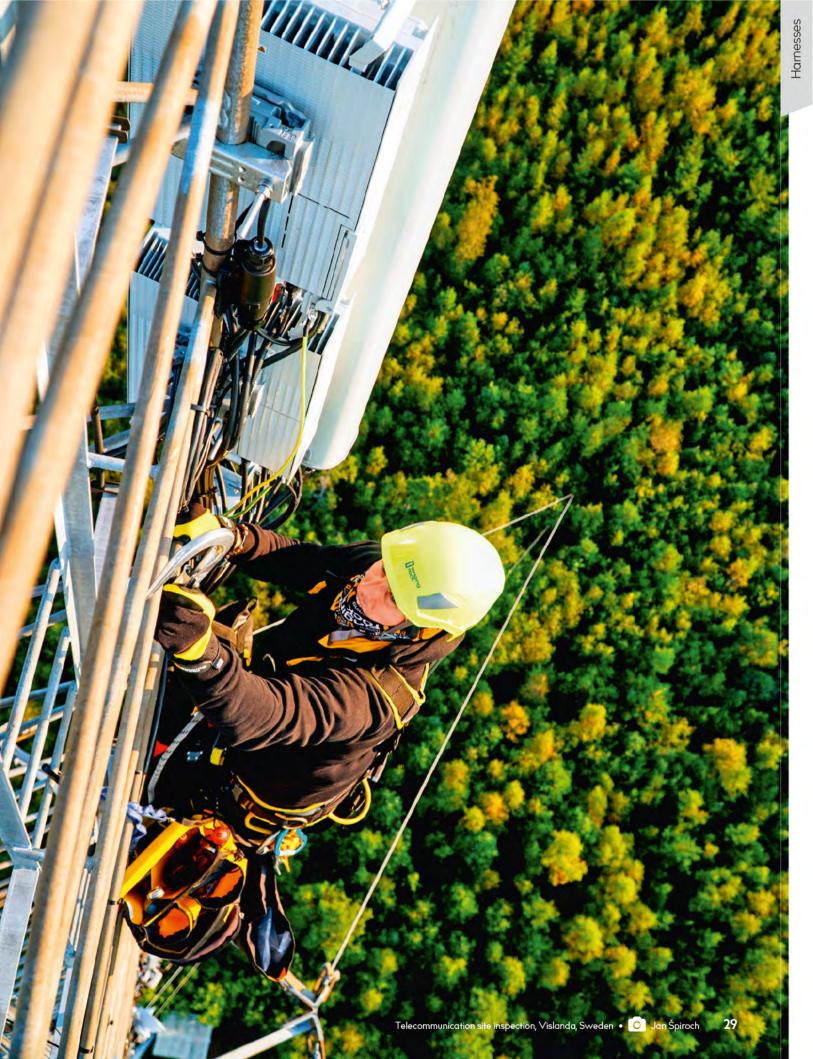





Fully adjustable sit harness for work positioning. The new design of this sit harness is characterized by perfect functionality, great comfort and lightness. Intended for all vertical activities without any risk of the fall.

- super comfortable wide waist belt padding provides maximum comfort when working at height
- strength webbing on the waist belt is stitched in the way that at normal working situation the body weight is absorbed by the padding only
- anatomic leg loops and waist belt are covered with strong PES fabric providing high abrasion resistance
- SPEED buckles enable fluent and fast adjustment to fit a user's body
- side attachment points for work positioning according to EN 358
- front attachment point for descender placement or work positioning according to EN 813, EN 358

- reflective strap and printing on the waist belt increase the visibility in dark working
- conditions
 4 ergonomic braided gear loops with a bearing capacity 15 kg
- additional loops on the waist belt and leg loops with a bearing capacity of 5 kg offer additional space for the gear and better gear orientation
- slots on the waist belt for PORTER tool holder to carry your industrial tools

Size: S, M/L, XL Weight: (M/L) 1515 g • 53.44 oz Max. rated load: 150 kg C€ 1019 • EN 358 • EN 813



SIT WORKER 3D / STANDARD



Fully adjustable sit harness with easy-lock buckles for work positioning.

- thermo finished webbing in a waist belt for easy handling and higher durability
- all steel components finished with E coating for higher corrosion resistance
- super comfortable wide waist belt padding provides maximum comfort when working at height
- side attachment points for work positioning according to EN 358

Size: S, M/L, XL Weight: (M/L) 1195 g • 42.15 oz Max. rated load: 150 kg C€ 1019 • EN 358 • EN 813







W0076DR

W0075DR

black version - W0075DB

black version - W0076DB

URBAN II

FRANKLIN



Sit harness for work positioning

- anatomic waist belt and leg loops padding perfectly fits to man anatomy
- textile attachment point for work in hanging position, rappelling according to EN 813.
- textile positioning points according to EN 358 are placed symmetrically, tested for 15 kN strength.
- 2 braided gear loops with a bearing capacity of 10 kg provide enough space for 10 pieces of HMS carabiners
- additional loops with a bearing capacity of 5 kg offer additional space for the gear and better gear orientation
- slots designed for a secure hanging of expensive equipment (such as power saw, drilling machine,...)

Size: S, M/L, XL Weight: M/L 850 g (±15g) • 30 oz Max. rated load: 150 kg C€ 1019 • EN 358 • EN 813





W0010YB black version – W0010BB



Work positioning seat provides more comfort when hanging in the harness.

- intended for use with our fall arrest or work positioning harnesses
- easy to adjust with Rock&lock buckles. Attachment straps are shorter to fit better to thinner users
- inside padding is made of aluminium which allows long term use without any deformation
- wider sitting area ensures good stability and allows comfortable suspension as well as standing at work positioning
- suspension straps do not press on your thighs

 three D-rings (bearing capacity 50 kg) for bucket or other gear suspension

Max. load of seat: 150 kg Weight: 1615g • 57 oz W0022BB

Harnesses



C5056



RL CHEST

ALADIN



Chest harness

- designed to be used together with a sit harness
- optimising body positon while hanging or falling
- made from lightweight wide nylon webbing
- very durable and affordable to all climbers

Must be worn with sit harness. Do not use chest harness alone!



W0200BB



- non-padded
- Rock&Lock buckles on shoulder straps
- two D-rings with bearing capacity of 50 kg
- together with SIT WORKER 3D compose fully adjustable full body harness in con-
- formity with EN 361

Do not use separately - use only in combination with a sit harness!

Size: UNI Weight: 600 g • 21.2 oz € 1019

ARBO CHEST





Padded chest harness designed for the ARBO MASTER arborist harness.

- offers the user greater comfort when loading the harness with heavier equipment and a more comfortable ascent
- for comfortable donning, equipped with a trident with a whistle at the front
- in the shoulder padding, there is a tunnel on each side for threading a pull-on elastic band, which is specially designed for SRT technique
- loops on the front side for possible attachment of additional equipment and height adjustment for attaching a chest ascender

• the chest harness can be used with any harness equipped with three fixing eyes

The chest harness cannot be used alone!

Size: UNI Material: PAD, EVA foam, PES, Polyethylene, PP, Elastane Weight: 160 g / 5.6 oz Harnesses

ARBO MASTER



Fully adjustable work positioning harness with unique motion system at front attachment points, specially invented for professional arborists allowing freedom of movement at the tree top.

- super comfortable wide waist belt made of 3 inside webbings and wide leg loops made of 2 inside webbings provide maximum comfort when working in the harness
- removable and exchangeable bridge connecting the leg loops for variability of work at the tree top
- double rope connection bridge for two independent attachment points (EN 813) with a strength 15 kN
- knots on the connection bridge allow the length adjustment and replacement
- moveable O ring at the connection bridge as an attachment point (EN 813)
- adjustable red side D buckles between the leg loops and waist belt for the attachment point, used in a pair according to EN 813 with a strength 15 kN
- adjustable side positioning D rings possible to fold in when not in use
- replaceable adjusting webbing for D rings
- speed buckles enable fluent and fast adjustment of the waist belt and the leg loops, keep the adjusted size
- flexible rear rubber bands for adjusting the position of the leg loops
- 4 gear loops with a bearing capacity of 5 kg provide enough space for your gear
- rear loop for hanging heavy tools such as a chainsaw, etc. with a load capacity of 35kg
- 2 red textile loops with a load capacity of 5 kg for attaching a hand saw
- 2 small steel rings with a load capacity of 10 kg for attaching the chainsaw on the left and right side
- small textile loops to create your own additional gear loops with a load capacity of 5 kg
- loops at the waist belt for the possibility of attaching a chest harness



- slots for PORTER tool holder to carry your industrial tools
- wide rubber band for attaching the first aid kit to the harness
- neoprene pocket on the leg loop for small items
- identification and methodological label

Size: S/M/L, XL

Max. rated load: 120 kg Weight: 1680 g • 59.3 oz (S/M/L), 1760 g • 62 oz (XL) C€ 1019 • EN 358 • EN 813

SPARE PARTS:

W0109RX00 ARBO MASTER BRIDGE W0110RX00 ARBO MASTER ADJUSTABLE WEBBING



W0105BR



W8201BY00

EVACUATION TRIANGLE SIT II



Evacuation triangle for a person to rescue from a chair lift or a cable car.

- chest plastic buckle for easy putting on the triangle
- durable steel attachment points
- easy to put on and take off
- adjustable crotch webbing
- made from durable ripstop material

Only for rescue purposes. Size: UNI • Weight: 800 g • 1.8 lb EN 1498



EVACUATION TRIANGLE COMBI II



Evacuation triangle with shoulder straps for a person to rescue from a chair lift or a cable car.

- special shoulder straps for better fixing a person in evacuation triangle
- straps are made from different color for better attachment management
- durable steel attachment points
- easy to put on and take off
- adjustable crotch webbing
- made from durable ripstop material

Only for rescue purposes. Size: UNI • Weight: 880 g • 1.9 lb C€ 1019 • EN 1497 • EN 1498



W0005YBO9 black version – W0005BB09





Dog harness intended for transport of the dog from a helicopter.

- side light-alloy reinforcements
- easy and quick fastening with velcro
- max. load 150 kg

Size: UNI • Weight: 800 g • 1.8 lb





W8211BY00

Harnesses

BABY RESCUE BAG





Rescue bag for the children evacuation.

- designed for rescue transporting of the children (height 40-110 cm, max. weight 25 kg)
- safety fixation by 3 belts with Velcro and with the safety straps led to cross during the transporting.
- inner padding is very comfortable and fully removable and washable
- top cover with full zipper and ventilation hole
- stabilization strap of the top cover to prevent the camber of the cover to the face of the child during the transport by the helicopter
- colored loops for the carabiner fixation and adjusting the position of the bag
- side ventilation holes covered by PVC net
- durable material with the reflection elements
- hygienic inner textile cover included
- fulfils EN 1498 requirements

Size: 80x45x35 cm Weight: 3300 g Max. load: 25 kg Material: PVC, PAD, PES, PES / cotton C€

÷





W8220



(1) (1) (1) (1) (1) (1) (1) (1) (1) (1)	type	black version	code	size	weight M/L[g]	waist [on/in]	leg loops [cm/in]	height[on
XPERT 3D		1	W0078DR02	5		65-80 / 25-31	45-60 / 18-24	150-170
1 4	standard	1	W0078DR03	M/L	2110	75-100 / 29-39	50-75 / 19-29	160-180
			W0078DR05	XL		85-130 / 33-51	50-75 / 19-29	175-205
T		1	W0079DR02	s		65-80 / 25-31	45-60 / 18-24	150-170
6	speed	-	W0079DR03	M/L	2415	75-100 / 29-39	50-75 / 19-29	75 / 19-29 $160-180$ $75 / 19-29$ $175-205$ $50 / 18-24$ $150-170$ $75 / 19-29$ $160-180$ $75 / 19-29$ $160-180$ $75 / 19-29$ $160-180$ $75 / 19-29$ $160-180$ $75 / 19-29$ $160-180$ $75 / 19-29$ $160-180$ $75 / 19-29$ $160-180$ $75 / 19-29$ $160-180$ $75 / 19-29$ $160-180$ $75 / 19-29$ $160-180$ $75 / 19-29$ $175-205$ $50 / 18-24$ $150-170$ $75 / 19-29$ $160-180$ $75 / 19-29$ $160-180$ $75 / 19-29$ $175-205$ $50 / 18-24$ $150-170$ $75 / 20-29$ $160-180$ $75 / 20-29$ $160-180$ $75 / 20-29$ $160-180$ $75 / 20-29$ $160-180$ $75 / 20-29$ $160-180$ $75 / 20-29$ $160-180$ $75 / 20-29$ $160-180$ $75 / 20-29$ $160-180$ $75 / 20-29$ $160-180$ <t< td=""></t<>
1 2 3		1	W0079DR05	XL		85-130 / 33-51	50-75 / 19-29	
		×	W0080DR02	s		65-80 / 25-31	45-60 / 18-24	150-170
99	speed steel	×	W0080DR03	M/L	2685	75-100 / 29-39	50-75 / 19-29	160-180
_		×	W0080DR05	XL		85-130 / 33-51	50-75 / 19-29	175-205
ROFI WORKER 3D	1 1 1 1	100	1				1.200.5	1000
01		1	W0081DR02	S		65-80 / 25-31	45-60 / 18-24	150-170
20	speed	1	W0081DR03	M/L	1777	75-100 / 29-39	50-75 / 19-29	160-180
0		1	W0081DR05	XL		85-130 / 33-51	50-75 / 19-29	175-205
NO-		1	W0082DR02	S		65-80 / 25-31	45-60 / 18-24	150-170
TAN	standard	1	W0082DR03	M/L	1	75-100 / 29-39	50-75 / 19-29	160-180
	•	1	W0082DR05	XL	2075	85-130 / 33-51	50-75 / 19-29	175-205
ECHNIC				-		1.1.1.1		
		×	W0063BB02	S		65-80 / 25-31	45-60 / 18-24	150-170
V	standard	×	W0063BB03	M/L	1725	75-100 / 29-39	50-75 / 20-29	160-180
		×	W0063BB05	XL		85-130 / 33-51	50-75 / 20-29	175-205
		×	W0064BB02	s		65-80 / 25-31	45-60 / 18-24	150-170
1	speed	×	W0064BB03	M/L	2045	75-100 / 29-39	50-75 / 20-29	160-180
42		×	W0064BB05	XL		85-130 / 33-51	50-75 / 20-29	-
ECHNIC ANSI								
11	1	×	W0103BB02	5		65-80 / 25-31	45-60 / 18-24	150-170
	standard	×	W0103BB03	M/L	1805	75-100 / 29-39	50-75 / 20-29	160-180
Y		×	W0103BB05	XL		85-130 / 33-51	50-75 / 20-29	175-205
		×	W0104BB02	S		65-80 / 25-31	45-60 / 18-24	150-170
1 A 11	speed	×	W0104BB03	M/L	2085	75-100 / 29-39	50-75 / 20-29	160-180
	1.11	×	W0104BB05	XL		85-130 / 33-51	50-75 / 20-29	175-205
1		×	W0112BY02	s		65-80 / 25-31	45-60 / 18-24	150-170
		×	W0112BY03	M/L	2400	75-100 / 29-39	50-75 / 20-29	
		×	W0112BY05	XL	-	85-130 / 33-51	50-75 / 20-29	
35								
OOFMASTER								
1			W00918Y02	s		65-80 / 25-31	45-60 / 18-24	150-170
NY.		×	W0091BY02 W0091BY03	M/L	1570	75-100 / 29-39	45-60 / 18-24	160-180
10		*		XL.	15/0			1
X		×	W0091BY03	AL.		85-130 / 33-51	50-75 / 19-29	175-205



	type	black version	code	size	weight M/L[g]	weist [cm/in]	leg loops [cm/in]	height (an)
FACTIC MASTER								1
No							100000000	
		1	W0096BB02	s		70-85 / 27-33	45-60 / 18-24	150-170
T			W0096BB02	M/L	1740	80-100 / 31-39	45-80 / 18-24 50-75 / 20-29	160-180
Salara .		1	W0096BB05	XL		90-130 / 35-51	50-75 / 20-29	175-205
A				0.0				Multiple and
SEAMASTER 3D				6.00			1.	
	100 C							
		×	W0074DR03	s		65-80 / 25-31	45-60 / 18-24	150-170
IY		×	W0074DR03	M/L	1870	75-100/29-39	50-75/19-29	160-180
1		×	W0074DR05	XL.		85-130/33-51	50-75/19-29	175-205
PTY C								
		4.1 (2.1)	4 II		1.0.1			
ANTISHOCK		-		-	-			-
		×	W0086B002	5		65-80 / 25-31	45-60 / 18-24	150-170
1	standard	×	W0086B003	M/L	2430	75-100 / 29-39	50-75 / 20-29	160-180
		×	W0086B005	XL		85-130 / 33-51	50-75 / 20-29	175-205
7.1.8								
30								
TARZAN ECONOMIC	1	1	-	÷	1		-	-
\sim	1.1						L. Cesan A.	1.1
				South			11.55	2000
			W/ARTONN -	UNI	1050		59-78	150-200
			W0059BR	5	1050	UNI	43-78	110-150
2775								
		1	-	1			1	
ROPEDANCER II								
00								
1.4.4			W00878Y01	xs		50-80 / 20-31	UNI	125-155
100		×	W008/BY01 W0087BY03	S/M/L	1195	65-100 / 25-39	UNI	125-155
2		*	W0087BY05	XL/XXL	-	85-155 / 33-61	UNI	180-210
1 mil								100000
00								
BODY II	-							
		1	W0068BR03	S/M/L		UNI	4570 / 1827	150-185
	standard	1	W0068BR05	XL/XXL	1025	UNI	45-85 / 18-33	180-210
101		1	W0068BR07	XXXL		UNI	45-95 / 18-39	180-210
Par la								
and and	1.40	1	W0071BR03	S/M/L	1.1.1.1.1.1	UNI	45-70 / 18-27	150-185
X A	speed	1	W0071BR05	XL/XXL	1185	UNI	45-85 / 18-33	180-210
		1	W0071R07	XXXL		UNI	45-95 / 18-39	180-210




BODY II ENERGY SPEED			and the second se					
			and the second					
No.		×		S/M/L		75-125 / 29-49	55-70 / 22-28	150-185
	speed	×	W0093SY	XL/XXL	2250	85-140 / 33-55	65-90 / 25-35	180-210
				XXXL		85-155 / 33-61	65-105 / 25-41	180-210
BASIC			1			1	-	1
00			-					
0/0		×	W0089SY02	S/M/L		UNI	45-70 / 18-27	150-185
		×	W0089SY05	XL/XXL	820	UNI	45-85 / 18-33	180-210
Carl			0.000					
AA								
00								h 1
BASICLIGHT					-			
TAT								
4		×	W00905Y02	S/M/L		UNI	45-70/18-27	150-185
-0-		×	W0080SY05	XL/XXL	760	UNI	45-85/18-33	180-210
5.2								
TYT								
U.								
POLEII					-			<u>}</u>
		~	W0073BY02	S/M/L		75-100 / 29-39		
		1	W0073BY03	XL/XXL	575	85-130 / 33-51	ha an tao	
		1	W0073BY05	XXXL		95-150 / 37-59		
1000								
SIT WORKER 3D						Law and		
		1	W0075DR02	5		65-80 / 25-31	45-60 / 18-24	-
	standard	1	W0075DR03	M/L	1195	75-100 / 29-39	50-75 / 19-29	
11		-	W0075DR05	XL		85-130 / 33-51	50-75 / 19-29	
		1	W0076DR02	S		65-80 / 25-31	45-60 / 18-24	
	speed	1	W0076DR03	M/L	1515	75-100 / 29-39	50-75 / 19-29	
		1	W0076DR05	XL		85-130 / 33-51	50-75 / 19-29	1
UDDANIK								
URBAN II								
							1000	
		1	W0022BB02	S		65-80 / 25-31	45-60 / 18-24	0.1
0	standard	1	W0022BB03	M/L	850	75-100 / 29-39	50-75 / 19-29	
		1	W0022BB05	XL		85-130 / 33-51	50-75 / 19-29	
the second second			1.0					



Harnesses

	type	black version	code	size	weight M/L[g]	waist [an/in]	leg loops [cm/in]	height [cm]
		· · ·	C5056	UNI	240			
CHEST								
,Ч,	,	~	W0200BB	UNI			chest max. 125/49	
RBO CHEST		×	W0108BR00	UNI	160			150-210
ARBO MASTER	speed	×	W0105BR02 W0105BR05	S/M/L XL	1680	65-100 / 25-39 85-130 / 33-51	45-65 / 18-25 55-75 / 22-29	

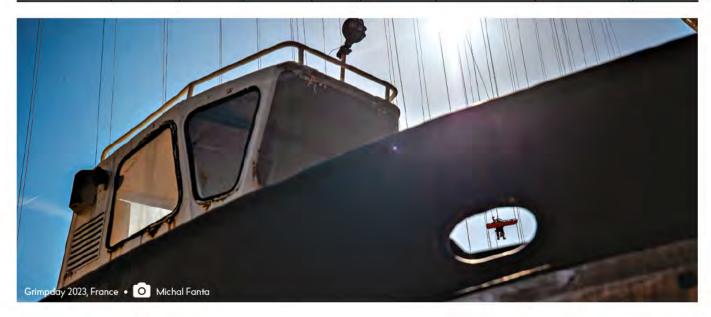





RO PE

STATIC DYNAMIC SPECIAL SPELEO CORDS ACCESSORIES







ROUTE 44

experience the touch of the future

Route 44 is unique technology invented and patented by Singing Rock. Route 44 technology allows blending of properties that were considered impossible before. Rope braided by using Route 44 technology is more compact, softer and above all it is more durable than conventional rope. All that is achieved by making no compromises in using correct sheath thickness, which is round-braided by 44 carriers. These features combine to give you better rope.





ULTRASONIC

ULTRASONIC ending is an excellent way of rope ending.

All SINGING ROCK ropes are ended by a unique technology ULTRASONIC. The load-bearing core and the protective sheath are joined into a compact unit in the last 15 mm of the rope which eliminates the sheath slippage.



STITCHED EYE

Selected SINGING ROCK static ropes which are marked with Stitched eye icon are possible to produce with one or two stitched eyes at the end of the rope.

L0450RR - red	L0450OO – orange
L0450WG – white	L0450BB – black

Excellent quality static rope intended for rope access, work positioing, rescue or manipulation with the objects.

- type A rope low stretch kernmantel rope designed for general use with patented rope-braiding technology ROUTE 44
- sheath is made on 44 carrier machine thus the core/sheath ratio is ideal with reference to the strength of the rope and strength of the rope with knots
- sheath is braided more densely which provides better protection of the core against dirt and dust
- rope is running smoother through belay/ rappel devices with lower risk of core prolapse through the sheath when is bent over small diameters

- meets the requirements that the rescuers, firemen, specialists working at height and other professionals require when working every day
- ultrasonic ending eliminates the sheath slippage
- possible to be produced with one or two stitched eyes at the end of the rope

STATIC R44 10.5 🐺 🛲





Low stretch kernmantel rope type A designed for general use with patented rope-braiding technology ROUTE 44

- intended for rope access, work positioning, rescue or manipulation with the objects
- sheath is made on 44 carrier machine thus the core/sheath ratio is ideal with reference to the strength of the rope and strength of the rope with knots
- sheath is braided more densely which provides better protection of the core against dirt and dust
- rope is running smoother through belay/rappel devices with lower risk of core prolapse through the sheath when is bent over small diameters

 ultrasonic ending eliminates the sheath slippage

L0430WR - white

L0430RR - red

 possible to be produced with one or two stitched eyes at the end of the rope

L0430BB-black

L0430KK - khaki

Ropes

STATIC 11.0		L0250WR – white	L0250RR – red L0250BB – black
	 Static rope for workers at height, rescuers, firemen, cavers and other professionals when working every day. low stretch kernmantel rope type A intended for rope access, work positioning, rescue, caving or manipulation with the objects ultrasonic ending eliminates the sheath slippage possible to be produced with one ro two stitched eyes at the end of the rope available in 3 colors 	Color: white, red, black Weight: 80 g/m Strength: 34.5 kN Diameter: 11 mm Length: pack: 30, 40, 50, spool: 100, 200 m C€ 1019 • EN 1891 • ☆	
STATIC 10.5		L0230WR – white L0230RR – red	L0230BB – black L0230KK – khaki
	 Low stretch kernmantel rope type A intended for rope access, work positioning, rescue, caving or manipulation with the objects. meets the requirements that the rescuers, firemen, specialists working at height and other professionals require when working every day ultrasonic ending eliminates the sheath slippage possible to be produced with one ro two stitched eyes at the end of the rope available in 4 colors 	Color: white, red, black, Weight: 77 g/m Strength: 30.4 kN Diameter: 10.5 mm Length: pack: 30, 40, 50, spool: 100, 200 m C€ 1019 • EN 1891 • ☆	

Grimpday 2023, France 🔹 🧿 Michal Fanta

STATIC NFPA

STATIC R44 NFPA 10.5 🐺

black – R0430BB khaki – R0430KK red - R0430RR white - R0430WR



Excellent static rope designed for technical use for rope access, rescue and for manipulation with the objects. Meet NFPA 1983 Technical Use requirements that the rescuers, firemen, specialists working at height and other professionals require when working every day. Weight: 72 g/m • Strength: 32 kN Length: pack: 150, 200, 300 ft / 46, 61, 92 m spool: 330, 600, 660 ft / 100, 183, 200 m Diameter: 10.5 mm

STATIC R44 NFPA 11.0 (7/16") 4

black – R0450BB orange – R0450OO red – R0450RR white – R0450WG



Excellent static rope, meet NFPA 1983 Technical Use requirements that the rescuers, firemen, specialists working at height and other professionals require when working every day. Manufactured by patented rope-braiding technology ROUTE 44 with ultrosonic ending. Weight: 77 g/m • Strength: 33.5 kN Length: pack: 150, 200, 300 ft / 46, 61, 92 m spool: 330, 600, 660 ft / 100, 183, 200 m Diameter: 11.0 mm • 7/16 in

Static elongation 3.0% (at 1.35 kN, 300 lbs) 6.8% (at 2.7 kN, 600 lbs) 10.8% (at 4.4 kN, 1000 lbs) NFPA 1983 Technical Use • EN 1891 • C€ 1019 • .

R0460WB

L0220WR-white

L0220BB - black

STATIC R44 NFPA 13.0 (1/2") 4



Excellent static rope for everyday work at height designed for general use for rope access, rescue and for manipulation with the objects. Meet NFPA 1983 General Use requirements.

Weight: 108.7 g/m Strength: 47 kN Length: pack: 150, 200, 300 ft / 46, 61, 92 m spool: 330, 600, 660 ft / 100, 183, 200 m

Diameter: 13.0 mm • 1/2 in

Static elongation: 3.4 % (at 1.35 kN, 300 lbs) 5.4 % (at 2.7 kN, 600 lbs) 7.6 % (at 4.4 kN, 1000 lbs) NFPA 1983 General Use

	100
	no.
10	
	6221
201	

Static rope type B. Low stretch kernmantel rope of a lower performance than type A ropes, requiring greater care in use.

- smaller diameter provides easier handling and lower weight
- recommended use: back-up rope, hauling and lowering, expeditions
- ultrasonic ending eliminates the sheath slippage
- available in 2 colors

CONTRA 10.5



TILIA 11.5

All-purpose static rope providing a balance between flexibility and abrasion resistance.

- intended for rope access, work positioning, rescue or manipulation with the objects
- Ultrasonic ending eliminates the sheath slippage
- white color makes the rope easy to spot in the dark conditions

Color: white Weight: 69 g /m Strength: 30 kN Diameter: 10.5 mm Length: pack: 30, 40, 50, 60, 70, 80, 100 m spool: 100, 200 m €€ 1019 • EN 1891 • ♠

> L04600V00 spliced loop - L04680



SPELEO R44 10.5 4

Static rope specially invented for professional tree care operations.

- sheath construction guarantees higher abrasion resistance and longer lifetime
- rope has high static strength and low elongation which provides efficient work at the tree top
- works perfectly with the friction knots as well with mechanical devices
- small diameter ensures very good performance in terms of flexibility and weight


 available with a splice at one end for optimal rope glide through devices like a cambium saver or pulley

Diameter: 11.5 mm • Weight: 90 g/m Number of falls: 20 • Strength: 30 Kn Min. strength with a knot: 18 kN Percentage of sheath: 54% Sheath slippage: 0.5% • Static elongation: 3% Shrinkage: 1 %Material: PES/PA C€ 1019 • EN 1891

L0440WR



SPELEO



- sheath is made on 44 carrier machine thus the core/sheath ratio is ideal with reference to the strength of the rope and strength of the rope with knots
- rope is running smoother through belay/ rappel devices with lower risk of core prolapse through the sheath when is bent over small diameters
- white color makes the rope easy to spot in the dark

• ultrasonic ending eliminates the sheath slippage

Color: white Weight: 72 g/m Strength: 33.4 kN Diameter: 10.5 mm Length: pack: 30, 40, 50, 60, 70, 80, 100 m spool: 100, 200 m C€1019 • EN 1891 • ♠

L0240WR



Static rope developed especially for cave explorers.

- all-purpose rope providing a balance between flexibility and abrasion resistance that is ideal for your explorations
- great rope for wet and muddy conditions
- white color makes the rope easy to spot in the dark
- ultrasonic ending eliminates the sheath slippage

Color: white Weight: 71 g/m Strength: 29.4 kN Diameter: 10.5 mm Length: pack: 30, 40, 50, 60, 70, 80, 100 m spool: 100, 200 m C€1019 • EN 1891 • ♠

L026

Ropes

L3060CX

DNA DRY 8.9

ICON DRY 93 🐺 👞

One rope for all your dimbing activities. Suitable for sport dimbing at the top level and also for mountaineering and glacier tours thanks to its lightness and water resistance.

- certificated as a single, twin and half rope for the widest range of use
- extremely lightweight, ideal rope for onsight, flash or redpointing your climbing projects where every small detail matters
- great rope for mountaineering, glacier tours or trad climbing

- rope is soft and easy to manipulate in all belay devices
- UIAA water repellent treatment achieved by revolutionary nanotechnology, this treatment gives the rope longer lifetime and water resistance
- thermotransfer end marking
- middle marking
- ultrasonic ending

C€ 1019 • EN 892 • ① • ① 1200

L0384RX



or glacier/mountain usage thanks to its lightness and water resistance. • extremely lightweight and robust; it is

Excelent single rope for high-level climbers

- ideal for hard routes onsight, flash or redpointing where every gram counts
- produced on 44-carrier machine, Route 44, Singing Rock's patented technology
- with our special UIAA water repellent treatment Icon 9.3 Dry is ideal for rock climbing, pumpy routes or extreme ascents in the mountains
- DRY technology is applied on the ropes by revolutionary nanotechnology
- the sheath is more resistant against breakage, but on the other hand it is smoother
- DRY treatment
- Thermotransfer end marking
- Middle marking
- Ultrasonic ending

(€ 1019 • EN 892 • . 1)

L0380YX



Excelent single rope for high-level climbers.

- extremely lightweight and robust; it is ideal for hard routes onsight, flash or redpointing where every gram counts
- produced on 44-carrier machine, Route 44, Singing Rock's patented technology
- this unique technology gives to the rope great handling, low-weight and high durability
- the sheath is more resistant against breakage, but on the other hand it is smoother

- Thermotransfer end marking
- Middle marking
- Ultrasonic ending

C€ 1019 . EN 892 . . .

L0524GW




- A top-class single rope with low weight and great handling qualities for high-level climbers.
- Single Tech construction provides increased resistance to abrasion and great handling qualities
- rope is soft and easy to manipulate in the belay devices
- although having a small diameter, this rope provides long lifespan
- special UIAA water repellent treatment provides longer lifetime during the usage

- DRY technology is applied on the ropes by revolutionary nanotechnology
- ideal for sport climbing and single pitch ice climbing
- DRY treatment
- Thermotransfer end marking
- Middle marking
- Ultrasonic ending

^{(€ 1019 •} EN 892 • Q. • 1

Ropes

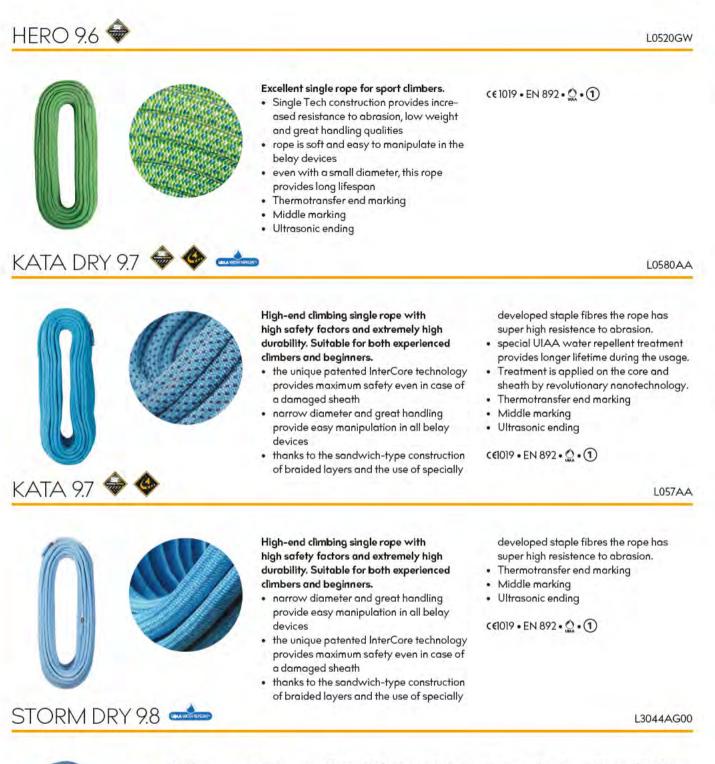

Single rope with great balance in weight, durability and use. Perfect choice for allround climbing.

- this rope provides great handling, low-weight and high durability
- DRY treatment provides longer lifetime during the usage
- special UIAA water repellent treatment is applied on the ropes by revolutionary nanotechnology which makes the top of the line impregnated ropes
- narrow diameter and higher UIAA fall rating (UIAA falls 9) help you to improve your climbing achievements
- ideal for all-round climbing, training hard routes and RP ascents.
- Thermotransfer end marking
- Middle marking
- Ultrasonic ending

(€1019 · EN 892 · 0 · 1

STORM 9.8 L3040GA00 Single rope with great balance in weight, Thermotransfer end marking durability and use. Perfect choice for all- Middle marking round climbing. Ultrasonic ending narrow diameter and higher UIAA fall C€ 1019 • EN 892 • ○ • ① rating (UIAA falls 9) help you to improve your climbing achievements this rope provides great handling, low-weight and high durability the rope is very compact, durable and pleasant to use ideal for all-round climbing, training hard routes and RP ascents. GYM 10.1 L3050RY00 Single rope specially invented for the narrow diameter and great handling climbing gyms, adventure parks or rope provide easy manipulation in all belay courses. devices this rope is designed for heavy usage · ideal for climbing schools, gyms, adventuwith high safety factors and extremely re parks and rope courses. high durability thermotransfer end marking special technology of braided core gives ultrasonic ending the rope great resistance parameters braided core and compact sheet minimize CE 1019 . EN 892 . . . the inter-fiber friction which give the result of the increased resistance to abrasion mainly when top-roping SCORE DRY 10.1 L0364LA00 General use rope for your climbing UIAA water repellent treatment achieactivities. Suitable for climbing gyms or ved by revolutionary nanotechnology, this sport climbing. treatment gives the rope longer lifetime manufactured using Singing Rock's and water resistance unique patented Route 44 technology Thermotransfer end marking this technology gives the rope excellent Middle marking handling, low weight and long lifetime Ultrasonic ending easy to tie and untie knots, pleasant to (€ 1019 • EN 892 • 0 • 1 work with. rope is soft and easy to manipulate in all belay devices SCORE 10.1 44 L0360GG Great rope for sport climbing with excellent Middle marking visibility. Ultrasonic ending made by Singing Rock patented techno-(€ 1019 • EN 892 • ○ • ① logy R44, which gives to the rope well balanced rate of weight and diameter this unique technology gives to the rope great handling, low-weight and high durability

- rope is very compact, durable and pleasant to use
- suitable for all belay devices on the market
- Thermotransfer end marking

50

DYNAMIC

Ropes

DURAN 10.4 🌉		L0340AX
PATRON 11.0	 Ideal rope for indoor climbing and crags with rough rocks. made by Singing Rock patented technology R44, which gives to the rope well – balanced rate of weight and diameter rope is very compact, durable and pleasant to use rope has thicker sheath with perfect abrasion resistance still keeping good handling characteristics suitable for the most types of belay devices on the market 	 Thermotransfer end marking Middle marking Ultrasonic ending C€ 1019 • EN 892 • ♥ • ①
	 Dynamic single rope with high safety factor and great durability. designed for heavy usage in rope training centres, climbing schools and rescue situations rope has thicker sheath with perfect abrasion resistance suitable for the most types of the belay devices on the market Thermontransfer end marking Middle marking 	 Ultrasonic ending suitable for IRATA cow⁻'s tails c∈ 1019 • EN 892 • ○ • ①
ACCORD DRY 8.3		L0514
	 Half and twin rope with excellent durability and special Teflon® treatment. tested and certified according to the EN 892 standard requirements for half ropes and twin ropes. with our special UIAA water repellent treatment is ideal for ice climbing or wet conditions in the mountains UIAA water repellent treatment is applied on ropes by revolutionary nano- technology. 	 weight, diameter and number of falls are balanced in such a way that can be used as a half and twin rope. used in pairs, the climber can choose between the twin rope technique or half rope technique. Whatever technique is required at the time. Thermotransfer end marking Ultrasonic ending C€ 1019 • EN 892 • (2) • (2) (2)
ACCORD 8.3		L0510
	 Half and twin rope with excelent durability and lightness. compact rope which has minimal interfiber friction, thereby increasing dura- bility. tested and certified according to the EN 892 standard requirements for half ropes and twin ropes 	rope technique. Whatever technique is required at the time. • Thermotransfer end marking • Ultrasonic ending C€1019 • EN 892 • ♀ • 120

and twin ropes

as a half and twin rope

• weight, diameter and number of falls are balanced in such a way that can be used

• used in pairs, the climber can choose between the twin rope technique or half

1.1.1

51


L3020

GEMINI DRY 7.9

Half and twin rope for those who count every gram.

- lightweight rope with top parameters allows wide use: ice climbing, mix routes, glacier tours or mountaineering
- tested and certified according to EN 892 standard requirements as half rope and twin rope
- with our special UIAA water repellent treatment Gemini 7.9 is ideal for ice climbing or extreme ascents in the mountains
- UIAA water repellent treatment is applied on ropes by revolutionary nanotechnology
- used in pairs, the climber can choose between the twin rope technique or half rope technique. Whatever technique is required at the time
- DRY TREATMENT Treatment
- Thermotransfer end marking
- Ultrasonic ending

(€1019 • EN 892 • 0 • 120

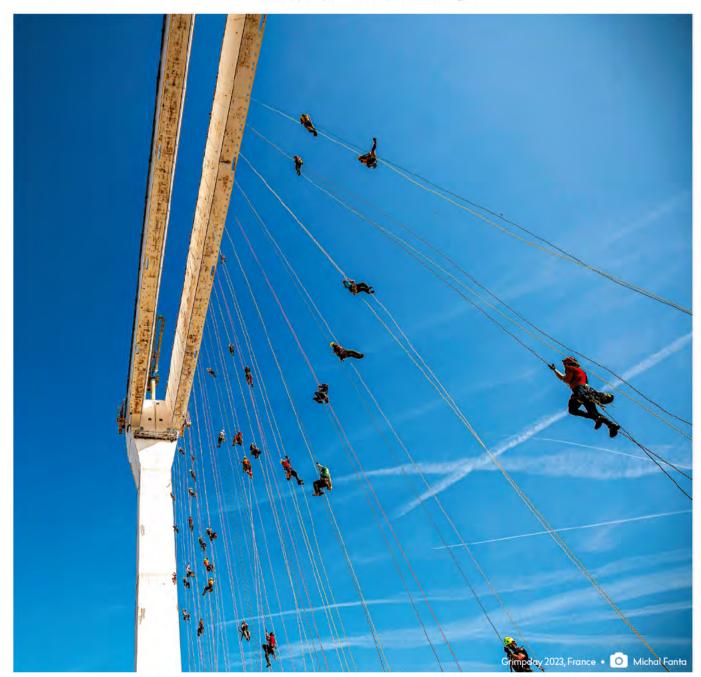

ROPE ACCESSORIES

THERMOCUTTER

X0004GB



ROPEMARKER

The ideal machine for cutting the ropes and accessory cords. Compact hand-held. The blade heats quickly. For save and fast cutting the ropes.

E0015XX

L0540C450

black - L0540B450



COW'S TAIL

When you need to mark your rope, use SINGING ROCK Rope Marker

- with dark ink and easy-to-use design, you'll never be left wondering in those unsure situations
- when the middle marking fades you can mark it again with this specially formulated rope marker
- you can mark the center of ropes or any other part of the harness or sling

For use with: PA, PP, PES, PE.

4,5m long piece of 11mm dynamic rope to create lanyards using figure eight knots according to IRATA recommendations.

Length: 4.5 m Rope diameter: 11 mm C€ 1019 • EN 892 • @



ROPE ACCESSORIES

HAMMER CORD

2 mm - L0002 3 mm - L0003





Very stable rope protector.

- made of stainless steel
- rubber layer on the lower side eliminates unwanted movement
- ensures safe work at height and load lifting over sharp edges

Weight: 1450 g / 51 oz Material: stainless steel + rubber



ROPE PROTECTOR

W8100B

Ropes

Protects rope sheath against abrasion on rough surfaces.

50/70/100/120 cm • 20/28/40/48 in Material: PVC Colour: mix colours

DEFENDER

W1027B



Protects rope sheath against abrasion on rough surfaces. Allows to put 2 ropes in.

80/120 cm • 32/48 in Material: Cortex

EDGE ROLLER

set - K0050OS03



Compact light edge roller for rope protection made from aluminium alloy.

- suitable for working on the sharp edges
- protects a moving rope againts the abrasion.
- fully adjustable to any work situation
- intended for safe work at height or heavy weights hauling
- parts are connected by maillons. Number of parts can be added as needed
- modular perfectly copy the terrain

- anodized side plates
- set includes 3 parts of edge roller and 4 maillons

Weight: 777g • 27.41 oz

EDGE ROLLER - PART

K0050OS01



• it is possible to extend the size of Edge Roller set by adding the separate moduls

Weight: 232g • 8.18 oz

DYNAMIC ROPES

1		code	colour	length [m]	diometer [mm]	weight [g/m]	static elong. [%]	dynamic elong, [%]	falls	impact force [kN]	type
DNA DRY 8.9		L3060CX	pink	30 - 80, 100, 200	8,9	51	5/4	30 / 27 / 25	6/15 /30	9,9 / 7,2 / 11,5	single/ half/twin
ICON DRY		L0384RX	red	30 - 80, 100, 200	9.3	56	7.5	34	5	8.6	single
ICON		L0380YX	yellow	30 - 80, 100, 200	9.3	56	7.5	34	5	8.6	single
HERO DRY	1.94	L0524GW	blue	30 - 80, 100, 200	9.6	59	5.1	35	8	7.9	single
HERO		L0520GW	white	30 - 80, 100, 200	9.6	59	5.1	35	8	7.9	single
KATA DRY	31	L0580AA	azul	.30-200	9.7	61	9.0	30	5	77	single
КАТА		L057AA	azul	30-200	9.7	61	9.0	30	5	7.7	single
STORM DRY	Alle	L3044AG	blue	30 - 80, 100, 200	9.8	65	7.9	.35	9	9.1	single
STORM	11	L3040GA	green	30 - 80, 100, 200	9.8	65	7.9	35	9	91	single
GYM	11	L3050RY	red	30 - 60, 100, 200	10.1	68	8.4	35	7	8.7	single
SCORE DRY	-//)	L0364LA00	mint	30 - 80, 100, 200	10,1	66	7	32	8	9,1	single
SCORE		L0360GG	green	.30 - 60, 80, 100, 200	10.1	66	7	.32	8	9,1	single
DURAN		L0340AX	blue	30 - 60, 80, 100, 200	10.4	70	7.1	31	9	9.1	single
PATRON	11	L0540YX	yellow	30 - 80, 100, 200	11.0	79	5.3	31	16	9,1	single
ACCORD DRY	11	L05140G	orange	30 - 70, 100, 200	8.3	43	11 / 6.4	33 / 34	5/15	6.3 / 9.7	half / twir
	124	L0514GO	green	30 - 70, 100, 200	8.3	43	11 / 6.4	33 / 34	5/15	6.3 / 9.7	half / twir
ACCORD	200	LOSIOAG	blue	30 - 70, 100, 200	8.3	43	11 / 6.4	33 / 34	5/15	6.3 / 9.7	half / twir
		L0510GA	green	30 - 70, 100, 200	8.3	43	11 / 6.4	33 / 34	5/15	6.3 / 9.7	half / twir
GEMINI DRY	21	L3020	red	30 - 70, 100, 200	7.9	39	10.5/8	38/33	5/16	5.1/7.9	half / twir
	111	L3020	yellow	30 - 70, 100, 200	7.9	39	10.5/8	38/33	5/16	5.1/7.9	half / twi

C€ • EN 892 • Q • packaging dynamic ropes: pack - 30. 40. 50. 60. 70. 80. 100 m • spool - 200 m

STATIC ROPES

		code	strength [kN]	knot breaking force [kN]	stitched eye strength [kN]	static elangation [%]	number of falls	weight [g/m]	type
STATIC R4411.0	11	L0450	34,9	22,3	28,5	3,2	>20	77	A
STATIC R4410.5	11	L0430	315	19,8	27,7	3,4	>15	72	A
STATIC 11.0		L0250	34,5	22,0	28,1	3,3	>20	80	A
STATIC 10.5		L0230	30,4	18,6	24,3	3,3	>10	69	A
STATIC R44 NFPA 10.5		R0430	32	-		3,5 / 7,2 / 9,9	-	72	general use
STATIC R44 NFPA 11.0	4444	R0450	33,5	1.182	2	3 / 6,8 / 10,8		77	technical use
STATIC R44 NFPA 13.0	1 Mil	R0460	47	30	τ.	3,4 / 5,4 / 7,6	-	108,7	technical use
STATIC 9.0	and a feel	L0220	24,4	13,6	÷	3,3	>15	54	В
CONTRA 10.5	malin	L026	30	18		2	>20	69	A
TILIA 11.5		L0460	30	18	15	3	>20	90	A

C€ • EN 1891 • Q. • packaging static ropes: pack - 30, 40, 50, 60, 70, 80, 100 m • spool - 100, 200 m

Static rope characteristic

Type A rope – low stretch kernmantel rope designed for general use by persons in rope access including all kinds of work positioning and restraint; in rescue and in caving Type B rope – low stretch kernmantel rope of a lower performance than type A ropes, requiring greater care in use (standard does not content other specification). Static strength defined in the standard

22 kN for the ropes of type A + 18 kN for the ropes of type B Another standard requirement says, the material used for rope production shall have the melting point higher than 195 °C, so polyethylene or polypropylene are not suitable for the production of the ropes.

Rope elongation

The rope elongation shall not be higher than 5% tested by loading the rope for 3 min with 150kg load (pretension 50kg)

Dynamic performance

Fall test with two meters long rope terminated with figure-eight knots; fall factor 1. The testing mass 100 kg for type A ropes, 80 kg for type B ropes.

Ropes

SPELEO ROPES


	-	strength [kN]	knot breaking force [kN]	static elongation [%]	number of falls	weight [g/m]
SPELEO R44 10.5	- Aller	33.4	20	3.3	>15	72
SPELEO 10.5	South Provident	29.4	17.2	4.5	>10	л Л

(€ • EN 1891 • O packaging speleo ropes: pack - 30. 40. 50. 60. 70. 80. 100 m • spool - 100. 200 m


ACCESSORY CORDS

coil	diameter [mm]	weight [g/m]	strength [kN]	length [m]	Ħ
L0021	2	2.8	12	100	328
L0031	3	6.5	1.9	100	328
L0041	4	12.6	3.2	100	328
L0051	5	18.7	5	100	328
LOO51BB	5	18.7	5	100	328
L0061	6	232	9	100	328
L0061BB	6	23.2	9	100	328
L0071	7	35.1	11.5	100	328
L0081	8	39.8	16	100	328

€€ 1019 • EN 564 • 💭 • note: Hammer Cords L0002. L0003 do not fulfill EN standards and €€.

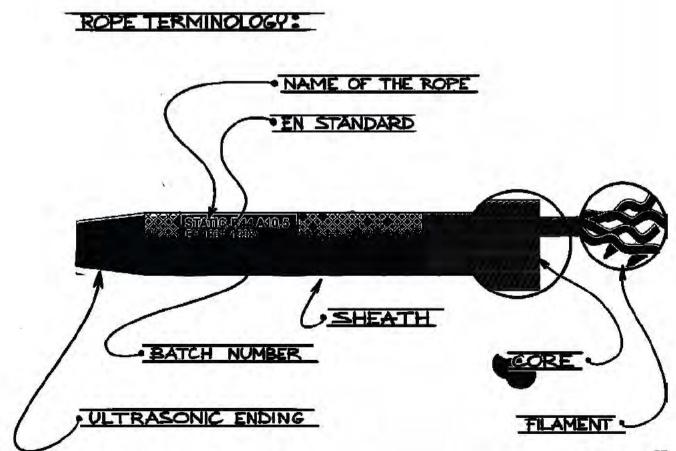



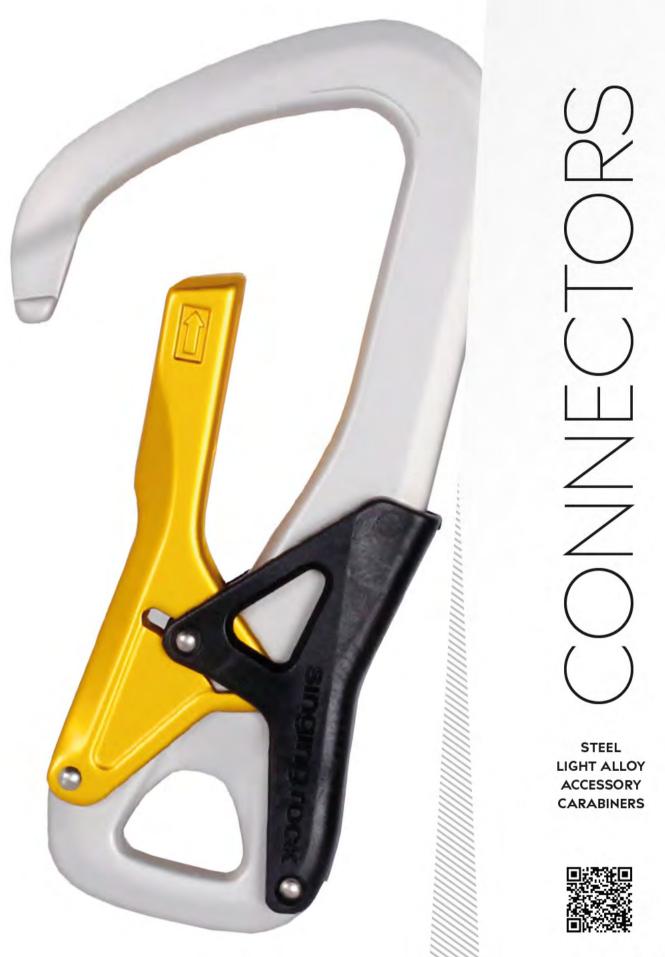

screw - K0114EE00

screw black - K0114BB00 triple lock - K0121EE00

triple lock black - K0121BB00

HECTOR / SCREW HECTOR / TRIPLE LOCK



Large versatile pear-shaped HMS carabiner with screw/triple lock gate designed for multiple uses mainly for belaying or anchoring when working at height. Due to high strength and large gate opening it is mainly used as a central carabiner when anchoring.

- pear-shaped basket facilitates belaying with the Münter hitch or other belay devices
- angled snag free Keylock nose for smooth clipping and unclipping maneuvers
- rough notches on the screw/triple locking sleeve for easy manipulation even with gloves
- each carabiner is individually tested for a strength of 10 kN
- large rope bearing area for better rope glide and reduced wear on the carabiner
- gate opening and basket area are large enough to easily accommodate a big anchor point or more slings
- hot-forged l-beam construction makes the carabiner extremely strong, stiff and light

- excellent ergonomic provides perfect handling with the carabiner
- anodized finishing increases corrosion resistance
- unique production number for better traceability and inspection

Strength: + 30 + 9 0 8 kN Gate opening (d): 26 mm Weight: screw - 83g / 2.9 oz triple - 89g / 3.1 oz

C€ 1019 • EN 12275 • EN 362

HECTOR BC / SCREW HECTOR BC / TRIPLE LOCK

screw BC – K0114EC00 screw BC black – K0114BC00 triple BC – K0121EC00 triple BC black – K0121BC00



Large versatile pear-shaped HMS carabiner with screw/triple lock gate and removable captive bar designed especially as a fixed connector in anchor systems or lanyards.

- captive bar keeps the carabiner in its proper orientation
- bar is easily removable with an Allen key no.3
- this carabiner keeps your gear well-arranged and minimizes the chance of cross loading
- unique production number for better traceability and inspection

Strength: ↔ 30 \$ 9 c 8 kN Gate opening (d): 26 mm Weight: screw - 85g / 3 oz Triple - 91g / 3.2 oz

C€1019 • EN 12275 • EN 362

LIGHT ALLOY

BORA / SCREW, BORA / TWL BORA / TRIPLE LOCK

screw - K0107EE00 screw black - K0107BB00 TWL - K0108EE00

TWL black - K0108BB00 triple lock - K0119EE00 triple lock black - K0119BB00



BORA screw



Bora TWL

Versatile pear-shaped HMS locking biner designed for belaying, rappelling and anchor building.

- hot-forged I-beam construction makes the carabiner extremely strong, stiff and light
- large rope bearing area for better rope glide and reduced wear on the carabiner
- pear-shaped basket facilitates belaying with the Münter hitch or other belay devices
- angled snag free Keylock nose for smooth clipping and unclipping maneuvers
- opening and basket area are large enough to easily accommodate the clove hitch
- available with screw, twist and triple lock gate, all of them easy to handle
- for better gear management the screw gates are in different colors
- each carabiner is individually tested for the strength 10 kN
- unique production number for better traceability and inspection

Strength: +> 23 \$8 0 8 kN Gate opening (d): 22 mm Weight: Screw 63g / 2.22 oz TWL/Triple lock 68 g / 2.4 oz C€ 1019 • EN 12275 • EN 362 • ○



Bora triple

BORA GP / SCREW



HMS carabiner designed specifically to eliminate the dangers of cross loading.

- safety wire gate keeps the carabiner in its proper orientation
- hot-forged I-beam construction offers an improved strength/weight ratio
- large rope bearing area for better rope glide and reduced wear on the carabiner
- screw locking sleeve for great handling and effective locking
- very popular for climbing gyms and ropes centres

black - K0107BP00

K0107EP00

- each carabiner is individually tested for the strength 10 kN
- unique production number for better . traceability and inspection

Strength: + 23 \$8 08 kN Gate opening (d): 22 mm Weight: 64g / 2.26 oz CE 1019 . EN 12275 . EN 362 . 0

COLT / SCREW

K0112EE00 black – K0112BB00



Our smallest, super light locking carabiner. Ideal for belaying and anchor building on trad and alpine climbs.

- hot-forged I-beam construction makes the biner very light and still extremely strong with 11 kN gate open rating
- angled snag free Keylock nose for smooth clipping and unclipping maneuvers
- ergonomic shape and gate position designed to provide large opening and large basket area
- screw locking sleeve for great handling and effective locking
- for better gear management the screw gates are in different colors
- each carabiner is individually tested for the strength 10 kN
- Unique production number for better traceability and inspection

COLT SCREW 3PACK



Three super light and small locking carabiners for belaying and anchoring for reduced price.

- screw locking sleeve for great handling and effective locking
- for better gear management the screw gates are in different colors
- each carabiner is individually tested for the strength 10 kN

Strength: ↔ 26 \$ 8 c 11 kN Gate opening (d): 18 mm Weight: 48 g / 1.69 oz C€ 1019 • EN 12275 • EN 362 • 💭

OXY / SCREW, OXY / TWL, OXY / TRIPLE LOCK

Screw - K0122EE05 Screw black - K0122BB05 TWL - K0122EE06

TWL black - K0122BB06 Triple lock - K0122EE07 Triple lock black - K0122BB07

light

Hot-forged light alloy oval carabiners designed to be used especially with pulleys, ascenders and descenders.

- hot-forged I-beam construction makes the carabiner extremely strong, stiff and
- rough notches on the locking sleeve for easy manipulation
- angled snag free Keylock nose for smooth clipping and unclipping
- almost oval shape makes the carabiner easy to turn around in device's attachment points, anchors or slings
- thanks to the oval shape, pulleys attached are loaded symmetrically
- large rope bearing area for better rope glide and reduced wear of the carabiner

- each carabiner is individually tested for a strength of 10 kN
- anodized finishing increases the corrrosion resistance
- unique production number

Strength: + 26 \$ 8 07 kN Gate opening (d): 21 mm Weight: Screw: 74g • 2.61 oz TWL/Triple lock: 81 g • 2.86 oz C€1019 • EN 12275 • EN 362

OXY BC / SCREW, OXY BC / TWL OXY BC / TRIPLE LOCK

Screw - K0123EC05 Screw black - K0123BC05 TWL - K0123EC06

TWL black - K0123BC06 Triple lock - K0123EC07 Triple lock black - K0123BC07



Hot-forged light alloy oval carabiner with a removable captive bar.

- captive bar keeps the carabiner in its proper orientation
- the bar is easily removable with an Allen key no.2
- this carabiner keeps your equipment well-arranged and minimizes the chance of cross loading
- missing captive bar does not affect the strength of the carabiner and it is allowed to use the carabiner without a bar
- serial unique number for better traceability and inspection

Strength: +> 26 = 8 co 7 kN Gate opening (d): 21 mm Weight: Screw: 76 g • 2.68 oz TWL/Triple lock: 83 g • 2.93 oz C€1019 • EN 12275 • EN 362



OZONE / SCREW, OZONE / TWL, OZONE / TRIPLE LOCK

screw - K0016AA00 screw black - K0016BB00

twist lock - K0017AA00 twist lock black – K0017BB00 triple lock - K0018AA00 triple lock black – K0018BB00



OZONE SCREW



OZONE TWISTLOCK



Oval carabiner with screw/twist/triple lock gate designed to be used with pulleys, ascenders and descenders.

- almost oval shape makes the carabiner easy to turn around in device's attachment points, anchors or slings
- angled snag free Keylock nose for smooth clipping and unclipping
- each carabiner is individually tested for a strength of 10 kN
- unique production number

Strength: \$26 kN+10 kN 07 kN Gate opening (d): 21 mm Weight: 80 g - screw, 85 g - TWL, triplelock € 1019 • EN 362 • EN 12275



OZONE TRIPLELOCK



MAILLON MINI OVAL

K82006Z

MAILLON SMALL OVAL

K82008Z

K82310Z



singing

D 6 mm • 4 kN gate opening 7,5 mm zinc-plated • 33 g



D 8 mm • 35 kN gate opening 11 mm zinc-plated • 77 g C€0082 • EN 12275 • EN 362 • €

MAILLON SMALL DELTA K82207Z

 ∇

D 7mm • 4 kN gate opening 8.5mm zinc-plated • 58 g



MAILLON BIG D

D 10 mm • 45 kN gate opening 10 mm zinc-plated • 153 g C€ 0082 • EN 12275 • EN 362 • Q

MAILLON BIG DELTA

K82210Z

BIG SQUARE

K82410Z



D 10 mm • 45 kN gate opening 12 mm zinc-plated • 153 g c€ 0082 • EN 12275 • EN 362 • Q



D 10 mm • 45 kN gate opening 12 mm zinc-plated • 166 g • 5.86 oz C€0082 • EN 12275 • EN 362 • @

BIG TWIST



D 8 mm • 32 kN gate opening 17,5 mm zinc-plated • 106 g • 3.74 oz C€ 0082 • EN 12275 • EN 362 • @ K82508Z

SMALL CONNECTOR

K3702PP steel – K3690ZO



Small connector with double trigger automatic locking gate opening 21 mm • 25 kN polished, Al • 150 g • 5.29 oz unique production number C€ 0333 • EN 362



K4080ZO

\bigcirc

D steel conector / screw with screw gate, key lock, zinc plated -50 kN--13 kN =20 kN gate opening (d) 25 mm • 255 g • 9 oz unique production number CE 1019 • EN 362

D STEEL / TRIPLE LOCK

K4081ZO



D steel connector /triplelock

with triplelock gate, key lock, zinc plated -50 kN - 13 kN =20 kN gate opening (d) 25 mm • 267 g • 9 oz unique production number C€ 1019 • EN 362

OVAL STEEL / TRIPLE LOCK K4241Z007



Oval steel connector /triplelock with key lock and triplelock gate

30 kN → 9 kN ⇒8 kN gate opening (d) 18 mm • 195 g • 6.9 oz unique production number C€ 1019. EN 362

OVAL STEEL / SCREW

K4241ZO05



Oval steel connector / screw with screw gate, key lock, zinc-plated 30 kN −9 kN ≈8 kN gate opening (d) 18 mm 176 g • 6,21 oz unique production number <€ 1019 • EN 362

CONNECTOR GIGA

K3550PP00



with double trigger automatic locking gate opening 110 mm • 25 kN polished, AI • 965 g • 34.04 oz unique production number C€ 2777 • EN 362

PALM CONNECTOR

)R grey - K0124ST09

vellow - K0124SY09

Light alloy double action carabiner designed to be used especially on Via Ferrata routes, also certified as an industrial termination connector.

- hot forged gate
- double action opening system
- wear indicator shows when to retire the carabiner from use
- anodized finishing increases corrosion resistance
- carabiner is available in two color versions (with yellow or grey gate)
- each carabiner is individually tested for a strength of 10 kN
- unique serial number

Weight: 117 g / 4.1 oz

Material: aluminum alloy, plastic, stainless steel Strength: ↔ 28 kN \$14 kN ⇔7 kN Gate opening (d): 28 mm C€ 1019 • EN 362/T • EN 12275/K

BIG CONNECTOR



K3536PP00

with double trigger automatic locking gate opening 60 mm • 28 kN polished, Al • 450 g • 15.87 oz unique production number C€ 2777 • EN 362

K9001BB00

PORTER XL

NEW



Having the necessary equipment on hand is a prerequisite for efficient work. When working at heights, our patented largevolume material and tool carrier for work harnesses takes care of that.

- patented PRESS CLICK attachment system allows quick mounting/dismounting on the harness
- EASY WIRE function, leaving the carrier lock in the open position, allows you to simply remove and attach equipment with one hand
- nose on the top serves to organize your
- equipment and put tools away
 40 mm gate opening allows for hanging e.g. a chainsaw directly by the handle
- maximum load capacity of 20 kg with a

safety factor of 5 allows heavy loads to be carried

minimum breaking strength is 100 kg

Weight: 80 g • 2.82 oz Material: plastic, steel Gate opening: 40 mm Max. load: 20 kg Color: grey

WARNING: NOT FOR CLIMBING! PORTER XL is not a strength carabiner or anchor point! Do not use it for fall arrest or belay. It is not PPE!

K9000BB03



PORTER

Plastic holder for racking ice screws, pitons and industrial tools.

- for racking ice screws, pitons and industrial tools on the harness
- easy clipping and un-clipping
- the nose on the upper part allows to set away some stuff in order to access stuff on the bottom.
- rubber part fixes the Porter on place and prevent it from rotation

WARNING: NOT FOR CLIMBING! PORTER is not a strength carabiner or anchor point! Do not use it for fall arrest or belay. It is not PPE!

Gate opening: 23 mm Max. load: 5 kg Weight: 32 g • 1.13 oz



MINI PEAR

K5052EE00



accessory carabiners mix colour • 16 g • 0.56 oz • gate opening (d) 11 mm Not for climbing. MINI D



0000000

accessory carabiners mix colour • 25 g • 0.88 oz • gate opening (d) 14 mm Not for climbing.

K0027YX00 bronze

K0027BY00 black

MINI D SCREW



Practical accessory carabiner which you will appreciate when climbing or working at heights.

- with the screw lock, you won't lose valuable equipment that you hang on the carabiner.
- suitable as an accessory for keys, for hanging climbing shoes, for attaching a nut tool or water bottle to the harness
- also works well for attaching a hammer, saw or other tools and accessories for working at heights

This carabiner is not a personal protective equipment and is not used for securing persons!

Color: black, bronze Weight: 28 g • 1 oz Material: aluminium alloy (anodized) Strength major axis: 3 kN Gate opening (d): 12 mm



MINI D SCREW 40 PACK

K0027BY40




Accessory carabiner which you will appreciate when climbing or working at heights. Discounted price pack of 40 pcs in a practical plastic box.

- with the screw lock, you won't lose valuable equipment that you hang on the carabiner
- suitable as an accessory for keys, for hanging climbing shoes, for attaching a nut tool or water bottle to the harness
- also works well for attaching a hammer, saw or other tools and accessories for working at heights

This carabiner is not a personal protective equipment and is not used for securing persons!

Color: black, bronze Weight: 28 g • 1 oz Material: aluminium alloy (anodized) Strength major axis: 3 kN Gate opening (d): 12 mm



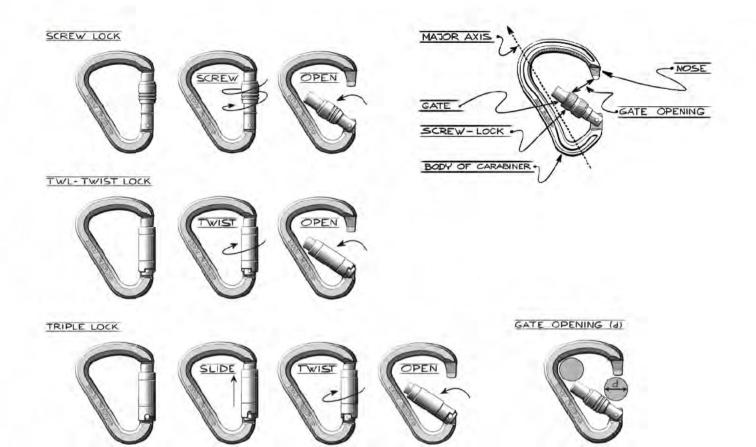

TECHNOLOGY



KEYLOCK for easy manipulation

Key lock is an extremely simple and ingenious locking system that solves the problems associated with the traditional design of carabiners. It eliminates any risk of ropes or slings becoming entangled in the gate or in the carabiner nose when it is being connected or released. Neither the gate, which is completely cylindrical, nor the nose has any sharp edges. Ropes and slings do not, therefore, come into the contact with any cutting edges.



HOT FORGING the latest technology in manufacturing of light alloy hardware

Aluminum alloy is heated state when being forged into the final shape. This allows the metal to be formed more easily so it can be moved to areas where it is needed and removed from the areas where it is not needed.

In comparison with cold forged binners, the hot forged binners are lighter, more durable and stronger.



UNIQUE PRODUCTION NUMBER identification of metal parts

For better traceability and inspection recording the Singing Rock metal parts are marked with the unique production number. Singing Rock metal parts marked with the unique production number are in this catalogue indicated with text "unique production number".





type	preview	code	colour / surface	material	EN12275 sport	EN362 work	⊕ kN	\$ kN	o kN	gote open. [mm]	weight [g]	oz
D STEEL / SCREW	0	K4080ZO	zinc-plated	steel	×	7	50	13	20	25	255	8.9
D STEEL / TRIPLE LOCK	0	K4081ZO	zinc-plated	steel	×	1	50	13	20	25	267	9.4
OVAL STEEL / SCREW	\bigcirc	K4241ZO05	zinc-plated	steel	×	~	30	9	8	18	176	62
OVAL STEEL / TRIPLE LOCK	\bigcirc	K4241ZO07	zinc-plated	steel	×	1	30	9	8	18	195	6.9
COLT / SCREW	0	K0112EE00	mix	ALalloy	~	4	26	8	u	18	48	17
	0	K0112BB00	black	ALalloy	1	1	26	8	0	18	48	1.7
BORA / SCREW	0	K0107EE00	mix	ALalloy	×	*	23	8	8	22	63	2.2
	0	K0107BB00	black	ALalloy	1	1	23	8	8	22	63	22
BORA / TWL	0	KO108EE00	grey	ALalloy	*	1	23	8	8	22	68	2,4
	0	K0108BB00	black	ALalloy	~	~	23	8	8	22	6B	2.4
BORA / TRIPLE LOCK	0	KOII9EE00	orange	ALalloy	~	*	23	8	8	22	68	2.4
	0	K0119BB00	black	ALalloy	2	1	23	8	8	22	68	2.4
BORA GP / SCREW	0	KQ107EPO0	grey	ALalloy	1	4	23	8	8	22	-64	2.3
	0	K0107BP00	black	ALalloy	1	2	23	8	8	22	64	2.3
HECTOR / SCREW	0	K0114EE00	blue	ALalloy	1	1	30	9	8	26	83	29
	0	K0114BB00	black	ALalloy	1	1	30	9	8	26	83	29
HECTOR / TRIPLE LOCK	0	K0121EE00	blue	ALalloy	*	1	30	9	8	26	-89	3.1
	0	K0121BB00	black	ALalloy	1	×	30	9	8	26	89	3.1
HECTOR BC / SCREW	0	K0114EC00	blue	ALalloy	*	1	30	9	8	26	85	3
	0	K0114BC00	black	ALalloy	4		30	9	8	26	85	3
HECTOR BC / TRIPLE	0	KO121EC00	blue	ALalloy	4	*	30	9	8	26	91	3.2
	0	K0121BC00	black	ALalloy	1	~	30	9	8	26	91	3.2
OXY SCREW	0	K0122EE05	golden	ALalloy	1	1	26	8	7	21	74	2,6
	0	K0122BB05	black	ALalloy	1	1	26	8	7	21	74	26
OXY TWL	0	K0122EE06	golden	ALalloy		×.	26	8	7	21	81	2.9
	0	K01228B06	black	ALalloy	-	~	26	8	7	21	ві	29

CONNECTORS

type	preview	code	colour / surface	material	EN12275 sport	EN362 work	e kN	¢ kN	co k N	gate open. [mm]	weight[g]	oz
	0	K0122EE07	golden	ALailay	1		26	в	7	21	81	2.9
OXY TRIPLE LOCK	0	K0122BB07	black	ALalloy	1	1	26	8	7	21	81	2.9
OXY BC SCREW	0	K0123EC05	golden	ALalloy	*	~	26	в	7	21	76	2.7
OAT DE SEREW	0	K0123BC05	black	ALalloy	1	1	26	8	7	21	76	2.7
OXY BC TWL	0	K0123EC06	golden	ALailoy	×	*	26	В	7	21	83.	2.5
OAT BE TWE	0	K0123BC06	black	ALalloy	~	1	26	8	7	21	83	2.9
OXY BC TRIPLE LOCK	0	K0123EE07	golden	ALalloy	*	*	26	в	7	21	83	2.9
	0	K0123BB07	black	ALalloy	1	1	26	в	7	21	83	2.9
OTONE / SCREW	0	K0016A.A00	blue	ALalloy	×	1	26	10	7	21	-80	2,8
OZONE / SCREW	0	K0016BB00	black	ALalloy	~	1	26	10	7	21	B0.	2.8
OZONE / TWL	0	K0017AA00	blue	ALalloy	$\mathcal{A}_{\mathcal{A}}$	2	26	9	7	21	85	3
OZONE / THE	0	K0017BB00	black	ALalloy	1	1	26	9	7	21	85	3
OZONE / TRIPLE LOCK	0	K0018A,A00	blue	ALalloy	×.	4	26	9	7	21	-85	3
OZONE / TRIPLELOCK	0	K0018BB00	black	ALalloy	~	1	26	9	7	21	85	3
SMALL CONNECTOR	B	K3702PP	silver	ALalloy	×	4	25			21	150	5.3
SMALL CORRECTOR	GLD .	K3690ZO	zinc-plated	steel	×	1	25			244	244	8.6
BIG CONNECTOR	OP	K3536201	silyer	ALalloy	×	*	28			60	450	15.9
GIGA CONNECTOR	C	K3550PP	silver	ALalloy	×	1	25			no	965	34
PALM CONNECTOR	>	K0124SY09	yellow	ALalloy	1	2	28	14	7	28	117	4,1
PALM CONNECTOR	X	K01245T09	grey	ALalloy	1	1	28	14	7	28	117	4.1

73





Helmets



W9607

BLAST





Super comfortable and lightweight helmet for work at heights. Thanks to its well thought-out design and numerous features, it fits like a glove and you'll want to wear it all day long.

- lightweight construction with EPS liner, which is found in comfy sports helmets, will keep you comfortable even when working long hours
- optimally deep profile ensures better stability on the head
- you can tune the depth as needed with the height-adjustable forehead band, so the helmet won't fall backwards or into your eyes
- helmet is ventilated by vent holes which are covered by a steel grille
- side buckles under the ears with adjustable positioning ensure ideal routing of the straps around the ears and under the chin
- newly designed chin buckle is low-profile and works like a charm
- headband circumference can be easily adjusted between 53-61 cm using the rear rotary wheel
- for easy transport and storage, the back part of the headband with the adjustment wheel can be folded into the shell
- inner padding is removable and washable
- integrated universal 30 mm euro slots are compatible with most hearing protectors on the market as well as the Singing Rock LAMPFIX lamp holder
- smaller integrated slots are designed for connecting the Singing Rock COVER shield
- clips for attaching a head lamp are recessed thus snag-free when dressing or working
- thanks to reflective stickers, no one will miss you even in low visibility

- helmet can be used safely in temperatures ranging from -10 to +50 °C
- unique product number makes it easy to keep track of periodic inspections
- available in six colors, find yours

W9607MX00BLAST BERRY BLUEW9607YX00BLAST NEON YELLOWW9607BX00BLAST ONYX BLACKW9607RX00BLAST ORIENT REDW9607WX00BLAST POLAR WHITEW9607ZX00BLAST SAFFRON GOLD

CE, EN 397

Color: berry blue, neon yellow, onyx black, orient red, polar white, saffron gold Weight: 410 g • 14.5 oz Size: UNI (53-61 cm) Materiál: main materials ABS/PC, EPS, POM, PP, PA







Helmets

FLASH



Professional protective helmets designed with emphasis to comfortability and durability. Helmets are available in two models depending on the user's choice according the working situation.

- helmet construction with shock resistant ABS/PC shell and without EPS lining provides great ventilation and comfort for user
- fully adjustable headband with two side and two rear adjusting sleeves to regulate the length of the chin straps
- fast, easy and durable size adjustment mechanism on the back of the helmet with UNI size 53–63 cm
- suspension straps easily adjustable to 3 depth levels

- four head lamp holders for any head lamp available on the market
- inner padding fully removable and hand or machine washable at 30 °C (86 °F)
- helmets can be safely used in the temperatures ranging from -30 to +50 °C (-22 to 122 °F)
- universal 30 mm accessory slot is compatible with most of the visors and hearing protectors on the market
- certified with Hellberg safety ear muffs
- reflective stickers included
- unique number marking





CLIMBING

FLASH INDUSTRY

red - W9601RX00 white - W9601WX00 yellow – W9601YX00 black – W9601BB00 high visible – W9601QX00

Professional safety helmet for industrial work and construction sites. Its main purpose is to protect the user against falling objects and voltage.

- safety chin strap in compliance with EN 397 is released at a load ranging between 15 and 25 daN (approx. 15–25 kg), which eliminates the risk of strangling
- suitable for working situations where, in case of foll, the risk of strangling is higher than risk of dropping the helmet
- fulfils EN 397 optional requirements: low temperature (-30°C), lateral deformation, electrical insulation (440V a.c.)
- five color variants
- fulfils side impact force requirements according to EN 12492

Weight: 455 g • 16.05 oz Material: ABS/PC Size: UNI (53–63 cm) Color: yellow, white, red, black, high-visibility yellow C€ 1015 • EN 397 (LD, 440∨ a.c., -30 °C)

> red – W9603RX00 high visible yellow – W9603QX00



FLASH ACCESS

Protective helmet for work at heights, and rescue purposes. It is primarily intended for protection against falling objects and to protect against voltage.

- helmet has a solid chin strap that will withstand a load of at least 50 kg, which prevents the possibility of dropping the helmet in case of fall
- suitable for work at heights activities where, in case of fall, the risk of dropping the helmet is higher than risk of strangling
- partly meets the requirements the requirements of EN 397 and EN 12492
- fulfils EN 397 optional requirements: low temperature (-30°C), lateral deformation, electrical insulation (440V a.c.)

 fulfils side impact force requirements according to EN 12492

Weight: 455g • 16.05 oz Material: ABS/PC Size: UNI (53–63 cm) Color: red, high-visibility yellow C€ (LD, 440V a.c., -30 °C) C€ 1015

> red – W9602RX00 high-visibility yellow – W9602QX00

FLASH AERO



Protective well ventilated helmet for work at heights, and rescue purposes. Suitable for physically hard working persons. Its main purpose is to protect the user against falling objects.

- helmet has a solid chin strap that will withstand a load of at least 50 kg, which prevents the possibility of dropping the helmet in case of fall
- suitable for work at heights activities where, in case of fall, the risk of dropping the helmet is higher than risk of strangling
- partly meets the requirements the requirements of EN 397 and EN 12492
- fulfils ventilation requirements according to EN 12492 which ensures better ventilation for physically hard working persons and persons working in excessively warm environments
- fulfils side impact force requirements according to EN 12492

Weight: 455g • 16.05 oz Material: ABS/PC Size: UNI (53–63 cm) Colors: red, high-visibility yellow C€

PENTA





The second generation of the popular, lightweight, comfortable and ventilated climbing helmet. Due to its comfort and lightweight construction, it is ideal for sport climbing, trad climbing, mountaineering and via ferratas.

- the first climbing helmet on the market in three sizes (S 48-54 cm, M/L 52-58 cm, XL 56-62 cm) for the widest range of users
- 30 % larger vent area than the first generation ensures excellent ventilation even on the hottest summer days
- weight under 200 g (size M/L) ensures comfort for all-day climbing
- compact upper protects the user from falling objects, yet maintains a low profile
- hard PC shell protects against sharp objects, while PS foam absorbs the impact force
- thanks to its low profile, the helmet does not get in the way when climbing and fits neatly on the head
- comfortable and easy size adjustment system with straps that don't squeeze even after a full day of climbing
- soft and wide chin strap ensures maximum comfort and its length allows a scarf or hat to be worn under the helmet
- clips for attaching the head lamp are recessed to avoid catching them when removing the slings or hood from the jacket
- inner padding is in one piece to prevent the loss of smaller parts, holds better, is completely removable and washable
- available in 4 colors with a modern look

C0091YX02 PENTA Syellow gold C0091YX03 PENTA M/L yellow gold C0091YX05 PENTA XL yellow gold C0091GX02 PENTA Smint green C0091GX03 PENTA M/L mint green C0091GX05 PENTA XL mint green C0091SX02 PENTA Solivine gray C0091SX03 PENTA M/L olivine gray C0091SX05 PENTA XL olivine gray C0091FX02 PENTA S spruce blue C0091FX03 PENTA M/L spruce blue C0091FX05 PENTA XL spruce blue

CE, EN 12492

Color: yellow gold, mint green, olivine gray, spruce blue

Weight: S 185g • 6.5 oz, M/L 195g • 6.9 oz, XL 205g • 7.2 oz Size: S (48-54 cm • 19-21 in), M/L (52-58 cm • 20.5–23 in), XL (56-62 cm • 22-24.5 in) Materiál: PC, EPS, PA, POM, PE foam, rubber









C0091JY02

PENTA JUNIOR

inging Contraction of the second seco

Lightweight, comfortable and fully ventilated helmet for the smallest climbers. For its comfort and lightweight construction, it is ideal for sport climbing, mountaineering and via ferratas. designed for child users with a small head circumference (48-54 cm) with a weight of 185 g, your child will not know he/she is wearing a helmet large vent area guarantees excellent ventilation even on the hottest summer days compact top protects children from falling objects, yet maintains a low profile hard PC shell protects against sharp objects, while PS foam absorbs the impact force thanks to its low profile, the helmet does not get in the way when climbing and fits neatly on the head

soft, wide chin strap ensures maximum comfort and its length allows a scarf or hat

to be worn under the helmet comfortable and easy size adjustment system with straps that do not squeeze even after a full day of wear inner padding is in one piece to prevent the loss of smaller parts, holds better, is completely removable and washable recessed clips for attaching any head lamp on the market comes with stickers for your child to create their own unique design

Color: arnica yellow / dark teal Weight: 185 g · 6.5 oz Size: UNI (48-54 cm) Material: PC, EPS, PA, POM, PE foam, rubber CE • EN 12492



HEX





Durable, fully ventilated helmet for climbing, mountaineering and other rope activities. Due to its durability, ventilation and versatility, it is suitable for both sport and trad climbing, via ferrata or rope parks.

- durable EPP + ABS shell protects against falling objects and guarantees a high degree of protection against impact force, including repeated impact force
- the "OPEN CELL" construction with 35 ventilation holes with a total area of 108 cm² guarantees maximum ventilation
- easy and quick size adjustment mechanism in the back of the helmet
- chin strap made of a soft and wide webbing provides maximum comfort
- inner padding is made as one piece, which prevents the loss of smaller parts and holds better
- inner padding is removable and washable
- integrated "EASY CLIP" front clips for reliable attachment of a headlamp, their shape prevents jamming of a hood / slings
- the "UNI FIX" elastic system on the backside simply attaches any headlamp or ski goggles
- available in two sizes (M 52/58cm a L 55/61cm)
- modern design and 5 colors

Size M (52-58 cm): ice white C09 arnica yellow C09 garish blue C09 mountain lake azure C09 fox red C09 Size L (55-61 cm): ice white C09 arnica yellow C09 garish blue C09 mountain lake azure C09 fox red C09

C0900WX03 C0900YX03 C0900MX03 C0900AX03 C0900RX03

C0900WX04 C0900YX04 C0900MX04 C0900AX04 C0900RX04

Helmets

Weight: M 300 g • 10.6 oz, L 330 g • 11.6 oz C€ • EN 12492












elme	name	code	color	head circumference (cm)	weight (g)	EN 397	EN 12492	ce						
8	BLAST	W9607	yellow, black, white, red, gold	53-61	410	1	×	CE	15-25 kg	440∨ o.c.	×	-10 °C	×	×
?	FLASH INDUSTRY	W9601	yellow, white, red, black, high-visibility yellow	53-63	455	×.	*	€€ 1015	15–25 kg	440V a.c.	×	-30°C	•	1
•	FLASH ACCESS	W9603	red, high visible yellow	53-63	455	×	×	€€ 1015	min. 50 kg	440V a.c.	×	-30°C	X	*
Ŷ	FLASH AERO	W9602	red, high visible yellow	53-63	455	×	×	ce	min. 50 kg	×	1	-10 °C	×	~
*	PENTA	C0091	yellow gold, mint green, olivine gray, spruce blue	48-54 / 52-58 / 56-62	185 / 195 / 205	×	~	¢€	min. 50 kg	×	~	-10 °C	×	*
*	PENTA JUNIOR	C0091JY02	amica yellow, dark teal	48-54	185 g	×	>	CE	min. 50 kg	×	~	-io°C	×	>
	нех	C0900	ice white, arnica yellow, garish blue, mountain lake azure, fox red	52–58 / 55–61	300 / .330	×	~	¢€	min. 50 kg	×	-	-10 °C	×	~

SAFE PC ELECTRIC ARC VISOR

singing rock

X0049XX00

SAFE NYLON MESH VISOR X0051XX00



- suitable for electrical work visor is possible to attach with or
- without the earmuffs
- for attaching to the FLASH helmet SAFE 2 FLEX CARRIER and SECURE earmuffs or CLASSIC ADAPTOR are needed

Material: PC Length: 200mm • Weight: 116g Thickness: 1,5mm CE • EN 166/1B389 • EN 170/2-1,2



- Light weight and non-conductive visor which stays close to your face for great coverage.
- gives a comfortable airflow
- approved to low impact
- visor is possible to attach with or without the earmuffs
- for attaching to the FLASH helmet SAFE 2 FLEX CARRIER and SECURE earmuffs or CLASSIC ADAPTOR are needed

Light transmisson 58–61% Length: 185mm Weight: 36g C€EN 1731/F • ANSI Z87

SAFE STEEL MESH VISOR X0050XX00



The unique hexagon shaped etching provides superior light transmission for added safety in low-light conditions.

- stays close to your face for great coverage
- gives comfortable airflow
- approved to low impact and suitable for applications such as forestry work and grass/bush trimming
- visor is possible to attach with or without the earmuffs
- for attaching to the FLASH helmet SAFE 2 FLEX CARRIER and SECURE earmuffs or CLASSIC ADAPTOR are needed

Weight: 52 g • Material: steel Light transmission: 82–85,5% Length: 185mm C€ • EN 1731/F • ANSI Z87

SAFE 2 FLEX CARRIER

X0052XX00







Allows attachment of the flex carrier for face shield without earmuffs.

- compatible with Flash helmets
- sold in pair

HELMET ACCESSORIES

COVER



Sight is the most important sense. The COVER shield for Singing Rock work helmets protects eyes from fast-moving particles. With this visor, no mess will hit your eye and you'll finish your job without a hitch.

- compatible exclusively with Singing Rock FLASH and Singing Rock BLAST helmets (cannot be used alone or with other helmets)
- designed for professional use, meets PPE Category II requirements
- provides increased protection against fast moving particles
- anti-scratch surface treatment ensures excellent optical performance

- durable positioning mechanism perfectly holds the shield in the open or closed position
- fabric pouch for transport and storage included

Weight: 110 g • 3.9 oz Material: polycarbonate Cۥ EN 166 1 F



COVER SMOKE



Sight is the most important sense. The COVER shield for Singing Rock work helmets protects eyes from fast-moving particles and, in the SMOKE variant, from the harsh sun. With this visor, no mess will hit your eye and you'll finish your job without a hitch.

- compatible exclusively with Singing Rock FLASH and Singing Rock BLAST helmets (cannot be used alone or with other helmets)
- designed for professional use, meets PPE Category II requirements
- provides increased protection against fast moving particles
- level 2.5 filter protects eyes from sunlight
- anti-scratch surface treatment ensures excellent optical performance

- durable positioning mechanism perfectly holds the shield in the open or closed position
- fabric pouch for transport and storage included

Weight: 110 g • 3.9 oz Material: polycarbonate Cۥ EN 166 1 F • EN 172 5-2,5



W9605XX00

W9605TT00

HELMET ACCESSORIES

1 C - X0048XX25 2 C - X0048XX29 3 C - X0048XX31

SECURE EARMUFFS



SECURE EARMUFFS 1C

The cap mounted earmuff is the ideal choice for any work that requires head and hearing protection.

- durable construction withstands rough environments
- slim design reduces the risk of snagging in confined areas
- available in three protection levels, clearly indicated with bright safety colours for easy identification and selection
- fully compatible with Safe Visor System
- universal 30 mm euro slot adaptor is compatible with most helmets on the market
- non-conductive
- smooth telescopic size adjustment
- certified with Flash helmets

Size: UNI • Weight: 250 g SNR: 25 • NRR: 22 • SLC (80): 25 Suitable for: construction sites, engineering, forestry work, agriculture, mining CEN 352-3:2002

SECURE EARMUFFS 2C

Great choice for long term use in middle noise environment or for shorter use with high noise level. The best choice for high frequency noise. Weight: 271g NRR: 24 • SLC (80): 28 Suitable for: construction sites, engineering, forestry work, agriculture, mining C€EN 352-3:2002

SECURE EARMUFFS 3C

Earnuffs suitable for extremely high noise environment. The best choice for low oscillation frequency.

Weight: 300 g SNR: 31 • NRR: 27 • SLC (80): 31 Suitable for: mining, car racing CEN 352-3:2002

XSTREAM LD



Hellberg hearing protection with Bluetooth for music streaming. Your hearing is protected while you enjoy your favourite music with excellent sound quality, and the built-in speech microphone allows you to make phone calls.

- level dependent Active Listening microphones
- waterproof to IPX4.
- easy to operate with push buttons
- voice assistant support
- USB charging
- battery power-save function
- fully compatible with Hellberg Safe Visor System
- · certified with FLASH helmets

Technical data

- . SNR: 28; NNR: 25; HML: 31-26-18
- operation temperature: -20°C / +55°C

X0062XX00

- battery type: Li-lon
- weight: 416 g (14.67 oz)
- Bluetooth® version: 4.1, A2DP 1.2, HSP 1.1, HFP 1.6
- run-time: 50 hours
- stand-by time: 100 hours
- charging time: 3 hours

1974 EN352-3, 4, 6, 8 • ANSI S-3.19-1974 • CSA Z94.2-02 ROHS • REACH • WEEE

W96065X00

W9608SX00

LAMPFIX



Lamp holder on the side of the working helmet.

- fits into universal 30 mm slot on the helmet
 suitable for the lamps with a diameter 18–23 mm (lamp not included)
- ideal with Flash helmet, compatible also with Petzl, Kask and other helmets on the market
- compatible with Hellberg hearing protection
- compatible with Cover protective eye shield also in combination with Hellberg hearing protection

Weight: 15g • 0.53 oz Material: PA, rubber



FLASH PADDING

W9604BX00

Replacement foam padding for FLASH helmets.

 easy maintenance and replacing the padding

Weight: 6 g Material: PE



BLAST PADDING



Replacement padding for the BLAST helmet.

- easy maintenance and replacing
- washable by hand or in a washing machine at 30° C

Size: UNI Weight: 10 g • 0.35 oz Material: PES

PENTA PADDING

C0092XX



Replacement padding for the PENTA helmets

- easy maintenance and replacing
- washable by hand or in a washing machine at 30° C

Size: S, M/L, XL Weight: 10 g (M/L) Material: PES

HEX PADDING



Replacement padding for the HEX helmet

- easy maintenance and replacing
- washable by hand or in a washing machine at 30° C

Size: M, L Weight: 10 g Material: PES C0901SB





ANCHOR AND BELAY DEVICES ASCENDERS DESCENDERS PULLEYS SELF BRAKING DEVICES RETRACTABLE FALL ARRESTERS





SIR

K032SIR00

DESCENDERS



Robust multifunctionality device for use in industrial rope access. Its functionality spans the range from rope descender and abseiling device through fall-arrest device to work positioning device for use on roofs and edges.

- unimpeded movement of the cam
- by pulling onto the working end of the rope the cam engages and jams the rope
- by pulling the lever the cam gradually releases the rope. If the lever is pulled down to its terminal position the doublestop function is triggered which blocks the rope again
- spring loaded pin for impeded swinging of the cam
- easy and intuitive installation of the device onto the rope. (watch the pictograms and read the instruction of use)
- no hidden mechanisms for easy inspection
- metal lever under all industrial conditions tested for 225Kg according to EN 12841(rope access)

Weight: 365g • 12.88 oz Rope diameter: 10–12 mm Working load: 225 kg

EN 341-A Singing Rock static rope R 4411mm EN 12841-C static rope 10–12mm C€ 0123



K031DSD00

DOUBLE STOP PLUS



Descender with anti-panic system in case of accidental loss of descent control.

- the descender doesn't have movable flanges. This makes it a robust and mistake-resilient device (quick insertion and release, no need to unclip it for rope insertion)
- new cam tested for higher loads enhanced braking in both stop positions
- Unique way of rope insertion. Diminished possibility of incorrect insertion of the rope. Even incorrect insertions will not result in a fall as the rope is blocked.
- sensitive and longer handle enables smooth descent without harmful rope twisting, gentle and progressive braking (enhanced press stop braking mode)
- rubberized handle provides pleasant feeling, non slip and thermal insulation.
- ergonomically improved curved edges and longer flanges provide the user with a comfortable grip with the handle
- integrated wear indicator
- high strength plain bearing added to the pivoting cam
- all parts in contact with the rope are

made of stainless steel – minimum possible wear

rope diameter: 9–12mm
 9mm – max. rated load 130 kg
 10–12mm – max. rated load 200 kg

Weight: 421 g • 14.85 oz • Breaking loads in excess of 22 kN.

Increased maximum rated load to 200 kg. Reduced slippage of the rope to 600 daN. Reduced force required on the handle. C€ 0123 • EN 12841 TypeC

DESCENDERS AND BELAY DEVICES

INDY EVO PLUS



Manually operated descender device with double auto-locking system, that locks both when the lever is released or when it is pressed.

INDY EVO is also a descender device (conform to EN 12841 type C) for working rope and it allows a descent at a controlled speed and stop at any time, hands free, on a static rope (EN 1891) or dynamic rope (EN 892).

It allows the lowering of two people at the same time.

Dimensions: 212x58x38 mm Weight: 480 g • 16.9 oz Rope Ø 10-12 mm (100 kg) Rope Ø 11-12 mm (200 kg) NFPA 1983 (2012 ED) Rope Ø 10-13 mm (one person only) C€0426 • EN 341 • EN 12841



grey – K0043SX00 orange – K0043OX00

RAMA



Intuitive single rope belay device with enhanced braking feature. Designed for gym or single pitch sport climbing.

- reliable locking geometry provides added level of safety to your belay
- operating is very simple, as it works without any moving parts or lever
- large clipping area for most common carabiner shapes, works best with BORA or OXY carabiner
- durable stainless steel braking surface provides longer lifetime and the smooth and secure control for gradual lowering
- functionality is according to the tube principle and is therefore suitable for lead and top-rope climbing
- compact geometry makes paying out rope even faster and easier, while the handle has a comfortable and firm grip.

Single rope belay device with enhanced braking feature and hot-forged light alloy oval carabiner OXY TWL create a perfect set for lead or top-rope climbing.

Weight: 165 g • 5.82 oz Rope diameter: 8.7 – 11 mm Material: Light alloy, steel, plastic

M0201XX00

Weight: 84g • 3 oz Rope diameter: 8.7 – 11 mm Material: Light alloy, steel, plastic EN 15151-2

RAMA SET



K0101BX00

Hardware

91

black matt - K6140BB00

K6140EE00

K6132EE

black matt - K6132BB

SHUTTLE



Belay and rappel device

One device to do it all, the Shuttle offers maximum versatility. It has a groove, designed and shaped to provide equal friction for both thin and thick ropes.

- When you're belaying from above, the "guide mode" lets you bring up one or two seconding climbers under control. For lowering, it has a small secondary hole that you can clinch carabiner or sling to release the device.
- designed for twin, half and single ropes
- lightweight and compact
- V-grooves for high friction when belaying the leader or rappeling
- only 65 g one of the lightest belay devices on the market
- self locking function when belaying the second
- eye for releasing the weight
- possibility of simultaneous belaying two climbers
- weight: 65g 2.29 oz
- material: light alloy

Rope diameter: (2)(3) 7,8 – 10,5 mm (1) 9 – 10,5 mm EN 15151-2



BUDDY



Light and compact belay tube. For all-round climbers. Designed for ropes 7,8 – 11 mm mix color • 54g • 1.91 oz

EN 15151-2





BELAY DEVICES

K6031EE black matt – K6031BB



Designed for ropes of bigger diameters.

30 kN • color mix • light alloy • 125 g • 4.41 oz

- for ropes of various diameters
- easy rappelling
- effective heat distribution

EN 15151-2

FIGURE 8 M

FIGURE 8L



K6021EE black matt – K6021BB

Designed for ropes of smaller diameters. 25 kN • color mix • light alloy • 104g • 3.67 oz

EN 15151-2

RESCUE FIGURE EIGHT



light alloy - K6180BB

Special figure eight for the rescue situations and fast rappeling Strength: 40 kN Material: light alloy Weight: 154 g • 5.43 oz

LEFT - RK804BX0L

RIGHT - RK804BX0R

LIFT



Hand ascender for safe and smooth ascent. Extra wide handle and attachment point for two carabiners will fit everyone from bigwall climbers to workers at height or special forces.

- available in two variants for left and right hand
- stainless steel toothed cam for higher corrosion resistance and for any conditions (frozen or dirty ropes)
- overmolded grip and ergonomic upper part for a comfortable and powerful grip
- wide lower hole allows to connect two
 standard carabiners

- upper hole for clipping a carabiner around the rope
- trigger with a short descent feature

Weight: 190g • 6.7 oz Material: body – light alloy cam – stainless steel trigger – plastic

EN 12841 Static rope Ø 10−13 mm EN 567 Rope Ø 8−13 mm C€ 1019 • EN 567 • EN 12841 type B

> Left - RK807BX0L Right - RK807BX0P

CAM CLEAN

FOOT LIFT

Foot ascender to improve rope ascending in a rope access, Used in conjunction with LIFT and CAM CLEAN.

- stainless steel toothed cam for higher corrosion resistance and for any conditions (frozen or dirty ropes)
- cam / lever mechanism fully integrated into the body
- durable construction with stainless cast steel
- fully adjustable webbing to achieve the best comfort of use

- lower part is reinforced with tubular webbing for longer use
- quick and easy to adjust with O ring
- marked with unique production number
- for use with Ø 8-13 mm ropes, static and dynamic
- available in left and right version
- Foot Lift is not a PPE

Weight: 160g • 5.6 oz Working Ioad: 120 kg Material: light alloy, steel, plastic

RK805BX00



Compact and lightweight chest ascender for safe and smooth rope ascent, rescue and special rope techniques.

- simple and quick manipulation
- lower hole angled to keep flat position on the harness
- stainless steel toothed cam for higher corrosion resistance and for any conditions (frozen or dirty ropes)
- Upper hole for attaching a PULLER shoulder strap to keep the rope clamp in a correct position
- trigger with a short descent feature

Weight: 125g • 4.4 oz Material: body – light alloy cam – stainless steel trigger – plastic

EN 12841 Static rope Ø 10−13 mm EN 567 Rope Ø 8−13 mm C€ 1019 • EN 567 • EN12841 type B

STRAP FOR CAM CLEAN

W0085BB00



Strap for CAM CLEAN attachment to full body harnesses including plastic cover on the carabiner. Weight: 15g • 0.53 oz



FALL ARRESTER



BACK-UP



Fall arrester that follows the user in both directions and stops the possible fall

- safe and simple to use with one hand only
- shifting the special buton on the lock mode, it can be used also as a positioning device or a normal locking device
- supports also the strongest stress in semi dynamic way and it avoids the shocking effects on the ropes caused by the traditional self-locking devices wit thoothed cams
- connector included
- it can be used also as a positioning device or a normal locking device by shifting the special button on the lock mode.

Weight: 205 g • 7.23 oz (without connector), 420 g • 14.82 oz (connector included) Rope diameter: 10-12 mm EN 353-2 • EN 358 • EN 567 • EN 12841 A/B C€ 0426

95

K04000BB

Hardware

PULLEY TWIN

RK802EE00 black version – RK802BB00



Large double pulley for textile ropes for those who need great hauling efficiency, durability and still lightweight pulley.

- designed and optimized for use with a Prusik friction knot or any clamps
- sealed ball bearing and large diameter of the sheave provides great efficiency 94%
- top attachment point accepts up to three carabineers
- durable and lightweight high-efficiency single pulley for industrial use and hauling systems
- formed side plates provides protection of rope against contact with a surrounding
- fixed-by-forging sheave and anti dust cover of ball bearing provides great lifespan

 side plate holes enable cleaning of the ball-bearing surrounding

bottom attachment point: 12 kN strength: 36 kN working load: 4x3 kN max. Ø rope: 13 mm static and dynamic ropes sheave: aluminium alloy side plates: aluminium alloy sealed ball bearing: steel axle: stainless steel weight: 421 g + 14.9 oz unique production number C€ 1019 • EN 12278

> RK801EE00 black version – RK801BB00





Large single pulley for textile ropes for those who need great having efficiency, durability and lightweight pulley.

- durable and lightweight high-efficiency single pulley for industrial use and hauling systems
- sealed ball bearing and large diameter of the sheave provides great efficiency 94%
- designed and optimized for use with a Prusik friction knot or any clamps
- top attachment point accepts up to three carabineers
- formed side plates provides protection of rope against contact with a surrounding
- fixed-by-forging sheave and anti dust cover of ball bearing provides great lifespan

 side plate holes enable cleaning of the ball-bearing surrounding

strength: 32 kN working load: 2x3 kN max. Ø rope: 13 mm static and dynamic ropes sheave: aluminium alloy side plates: aluminium alloy sealed ball bearing: steel axle: stainless steel weight: 257 g • 9.1 oz unique production number C € 1019 • EN 12278

RK808OS00 black version – RK808BB00





Large pulley for those who need great hauling efficiency, durability and light weight.

- durable and lightweight single pulley for industrial use and hauling systems
- for use with static and dynamic textile ropes
- sealed ball bearing and large diameter of the sheave provide great efficiency 94%
- designed and optimized for use with Prusik friction knot or any clamps
- top attachment point accepts up to three carabiners
- formed side plates provide protection of rope against contact with a surrounding
- fixed-by-forging sheave and anti dust cover of ball bearing provide great lifespan
- side plate holes enable cleaning of ball bearing surrounding

- bottom attachment point strength 32 kN
- unique production number marking

Strength: 32 kN Working load: 2x3 kN Material Composition: 78% Light alloy, 21% steel, 1% plastic Max. Ø rope: 13 mm static and dynamic ropes Sheave: aluminium alloy Side plates: aluminium alloy Sealed ball bearing: steel Axle: stainless steel Weight: 276 g • 9.7 oz C€ 1019 • EN 12278

RK803BB00

TANDEM PULLEY



Double pulley for Tyrolean traverses and zip-lines with two stainless steel sheaves for both textile ropes (13mm) and steel wire cables (12mm).

Each sheave is equiped with a pair of sealed ball bearings for great durability. Hard aluminium alloy body is balck anodized and protects the sheaves from damage. Large attachment point can accommodate up to theree carabiners.

Second attachment point for back-up carabiner or tackle systems building. strength: 25 kN max. Ø rope: 13 mm static and dynamic ropes 12 mm steel cable Sheave: stainless steel side plates: aluminium alloy sealed ball bearing: steel axle: stainless steel weight: 290 g • 10.2 oz unique production number

C€1019 . EN 12278

PULLEY SMALL



Small pulley for textile ropes for those who occasionally need to build simple hauling systems or manipulate with the objects.

- lightweight single pulley for hauling and rescue
- brass self lubricating bearing ensures reliable efficiency up to 81 %
- suitable for use with a Prusik friction knot

RK800EE00 black version – RK800BB00

strength: 22 kN max. Ø rope: 13 mm static and dynamic ropes sheave: aluminium alloy side plates: aluminium alloy axle: stainless steel friction bearing: brass weight: 92 g + 3.3 oz unique production number C€1019 • EN 12278

PULLEY MIKY

RK806BB00



Lightweight pulley with two attachment holes Designed for tree climbing application. Suitable for use with Prusik friction knot.

- two attachment holes with strength 28 kN
- anodized aluminum alloy side plates
 aluminum alloy sheave for textile ropes
- and auxiliary cords up to 13mm in diameter • bronze self lubricating bearing ensures
- reliable efficiency up to 81%
- unique production number marking

Weight: 105 g (3.7 oz)Material: sheave and side plates - aluminium alloy, bearing - bronze, axle - stainless steelStrength: 28 kNMax. diameter of rope: 13 mmBearing: friction

C€1019, EN 12278

EASY LIFT



Rescue pulley for cableway evacuation.

- designed to connect directly on the carrying steel cable of the cableway
- it is used during rescue operations and is used for the rescuer's crossing from the cableway support to the seat/cabin and rescued persons
- thanks to two sheaves construction it does not jump even on a rough steel cable
- lighter about 50 g than previous Easy Lift
- bigger gate opening allows to use the pulley on a thicker rope and more massive seat feet, eg. six seat cableways
- for steel rope with max. diameter 60 mm
- marked with a unique production number for better traceability and inspection

Weight: 1350 g • 3 lb Strength: 30 kN Max. diameter of steel rope: 60 mm Max. speed: 2 m/s Working load: max. 6 kN Sheave: POM Material: light alloy, POM, stainless steel C€ 1017

RK714BB00

RK713BB00

RK809SO00

RIGGING PLATE 3/5

Aluminium alloy device for multi-point anchoring.

- provides efficient force distribution at different load directions
- low profile of the plate makes the connection as short as possible
- provides plenty of attachment holes
- rounded holes allow direct attachment of the ropes and slings to the rigging plate
- all attachment points are big enough to allow locking sleeves of most carabiners passing through

Weight: 145 g • 5.1 oz Material: light alloy Strength: 50 kN • Thickness: 8 mm C€ 1019

RIGGING PLATE 1/3



Aluminium alloy device for multi-point anchoring.

- helps to organize carabiners at the anchor point
- provides efficient force distribution at different load directions
- rounded holes allow direct attachment of ropes and slings to the rigging plate
- central attachment point can accommodate up to three carabiners
- all attachment points are big enough to allow locking sleeves of most carabiners passing through

Weight: 65g • 2.3 oz Material: líght alloy Strength: 36 kN • Thickness: 6mm C€ 1019

ANCHOR DEVICES

RINGO



Detachable ring for arborists and workers at height. Intended for semi-permanent connection. Can be loaded in any direction.

- strong and light body made of aluminium alloy
- minimum strength 20 kN in any direction
- inner diameter: 46 mm
- 10 mm clipping gap
- steel bolt
- unique seríal number

Weight: 75g + 2.6 oz Strength: 20 kN Gate opening (d): 10 mm C€1019 • EN 362

Spare part: K7003XX00 Bolt for Ringo (2 pcs)

RING



Load sharing rings used by a person for fall protection for work at height or mountaineering.

- anodized surface
- unique number marking
- two sizes, with inner diameter 28 or 46 mm

Weight: 39g • 1,4 oz (28 mm), 57g • 2,0 oz (46 mm) Material: light alloy Strength: 25 kN C€1019

PILOT R3



Pilot R3 Concrete Anchor is a reusable, safe, and secure anchorage solution for horizontal, vertical, or overhead anchoring applications.

- A rapid quick-release button allows users to easily install and remove, boosting productivity.
- Built with a rigid tri-wedge design and diamond-hard carbon coating, it enhances durability in all types of concrete applications.
- The anchor incorporates an omni-directional design allowing the connector to rotate 360 degrees, and flip back and forth 180 degrees, to increase connector compatibility.

- Secure one-hand operation with push-tostop installation
- Cycle tested to 5,000 uses
- Corrosion-resistant stainless-steel tri-wedge design
- Forged stainless steel swivel D-Ring
- For one user only

Diameter of a hole: 20 mm (3/4") Weight: 350 g • 12.4 oz

Material: light alloy Strength: 22 kN C€0161 · EN 795:2012 Type B • ANSI Z359.18 Type A

K7002BX46

RK400BB

X0069XXR3



REDBLOCK

K0006RP00

K00300G00



Anchor device, that extends lifetime of the rope when toproping

- ideal partner for adventure parks, rope courses and climbing gyms
- allows to be installed in two axises
 for better traceability and inspection recording the RedBlock is marked with the unique production number

Color: red Weight: 375 g + 13.23 oz Material: light alloy Sheave: stainless steel Max. diameter of rope: 12 mm Strength: 26 kN €€ 1019

TWISTER



Innovated rotating anchor

Placed between a load and either rope or cable, the twister avoids severe rope twisting while the load turns.

Working load: 4 kN Color: anthracite/yellow Strength: 22 kN Weight: 88 g • 3.1 oz C€ 0321 • EN 354

200 cm - W1011WB02 400 cm - W1011WB04 200 cm + K370 - W1012WB02 400 cm + K370 - W1012WB04

The work positioning lanyard with great handling makes your work safe and efficient.

- IImm rope sewn-in unopenable version of LOCKER – rope clamp (fall arrester)
- rope covered with tubular webbing
- parking cam for blocking in required position
- also available with stitched-in connector in accordance with EN 362 (K370)

Weight: 560 g (with connector), 410 g (without connector) Length: 200 cm, 400 cm C€ 1019 • EN 358 • EN 353-2

100

SITE

SITE LANYARD

200 cm - W1014WB02 400 cm - W1014WB04

- Spare part for SITE positioning system.suitable only with the LOCKER device for creating your positioning lanyard
- with an unopenable version of LOCKER certified in accordance to EN 353-2 and EN 358
- 11 mm rope covered with a tubular webbing
- one end of the rope is ended by a sewed eye, the 2nd one must be ended by a safety knot (see instructions of use)

C€1019 • EN 353-2 • EN 358





STAINLESS HANGER PLATE / WITH BOLT



Stainless steel hanger plates and bolts for permanent anchor points. Available in two different bolt sizes.

 recommended for outdoor, wet environment. Not recommended for aggressive environment (e.g. sea water, chlorinated pool water, chemically polluted environment, etc.)

10 mm RK702XX10 12 mm RK702XX12 10 mm w/bolt RK715XX10 12 mm w/bolt RK715XX12

Plate thickness: 3 mm Bolt length: 84 mm Length of the hole: 75 mm Strength: 25 kN Weight: Hanger plate 42g • 1.48 oz 10 mm w/bolt 112g • 3.95 oz 12 mm w/bolt 112g • 4.94 oz EN 795 • EN 959

> 10 mm RK704XX10 12 mm RK704XX12 10 mm w/bolt RK716XX10 12 mm w/bolt RK716XX12

ZINC PLATED HANGER PLATE / WITH BOLT



GLUE IN ANCHOR



Zinc plated steel hanger plates and bolts for permanent anchor points. Available in two different bolt sizes.

 recommended for indoor, dry environment Plate thickness: 4 mm Bolt length: 84 mm Length of the hole: 75 mm Strength: 25 kN Weight: Hanger plate 62g • 2.19 oz 10 mm w/bolt 100 g • 3.53 oz 12 mm w/bolt 125 g • 4.41 oz EN 795 • EN 959

RK703XX10

A0002SS01

Stainless steel durable permanent anchor point.

- works also in soft or pocketed stone
- smooth eye allows safe rope threading for retreat
- made of welded, grade AISI 316 stainless steel
- for drilled hole with diameter 12 mm
- recommended glue: UPM 44 or FIS 360V, resin capsule RM10

Diameter: 10 mm Length of shaft: 80 mm Weight: 120 g 3.18 oz Strength: 4> 30 kN \$ 25 kN EN 959 • EN 795 Type A

D-MOBILE



Door or window anchor point

- an indispensable anchor point protect against sudden falls
- the safety traverse offers in connection with the rope perfect safety solution when working in wall openings and on balcony support plates
- no tools are needed to fix the traverse in doorways, the opening of which may be up to 1100 mm wide for one person for two persons can be maximum opening up to 900 mm
- fast adjustment by pressing the pawl
- star grip to clamp the safety traverse
- bearing surfaces coated with synthetic material

Strength: 22 kN • Weight: 11 kg Dimensions: 141 x 13 x 13 cm €€ 0123 • EN 795 Type B

ANCHOR DEVICES

VERTICAL FIXED BEAM CLAMP



Fixed I-beam anchor is designed to clamp onto a vertical or horizontal I-beam to create a fixed anchor point.

- zinc plated components
- stainless Steel D-Ring Mount
- static tensile strength: 22kN
- maximum capacity 140kg when used as a single point anchorage

Span: 100–350 mm Maximum load: 140 kg Weight: 3105 g • 109.5 oz

Strength: 22 kN C€ 0321 • EN 795:2012 • ANSI Z359.18 • ANSI Z359.7 • OSHA 1910.66/ • OSHA 1926.503

SNAKE BRACE



Anchor point for through holes, designed to function as a link between the structure and the fall arrest, work positioning, rope access or rescue systems.

- intended for through holes whose minimum and maximum diameter corresponds to the type of Snake Brace in relation to the actual thickness of the current structure
- the opening need not be entirely regular but the minimum diameter must be flat. There must be a minimum space for installation behind the hole
- intended for a single user
- the maximum strength can be used only if the structure in which the anchor hole is located can withstand the load in all directions
- the minimum strength of the construction should be designed according to EN 795 (if not in accordance with EN 795, the load bearing capacity may be reduced)

- Snake Brace can be loaded in any direction only if also allowed by the construction in which is anchored
- can be used only with compatible connectors with locking mechanisms according to EN 362

Strength: 18 kN Length: 30, 60, 90, 120 cm Weight: (S 300) 162 g • 5.71 oz / (M 300) 395 g • 13.93 oz Material: S – dyneema, alloy, steel / M – PAD, alloy, steel

C€ 1019 • EN 795 Type B

type	strength	hole Ø min. (mm)	constr	ruction thi	min. open space				
			>5	≥ 50	≥ 100	≥ 150	≥ 200	≥ 300	behind the hole (mm)
			hole Ø	max. (mi					
s	18 kN	17,7	50	65	75	80	85	90	≥ 200
м	18 kN	22	175	195	210	225	235	255	≥ 450

X0075XX14

BANTAM BEAMER



Removable anchor point for construction girders

- designed for fall protection and rope access work positioning
- lighter, smoother, and easier to use
- constructed with lightweight aircraft aluminum bars and 360° swivel D-ring connection
- the clamps attach without tools to construction girders either overhead or underfoot
- · intended for one person only

Span: 89 - 355 mm Strength: 22 kN Weight: 1504 g • 3.3 lb C€ 0161 - EN 795:2012 Type B • ANSI Z359.18 Type A • ANSI Z359.7-2019 • OSHA 29 CFR 1926.502 • OSHA 29 CFR 1910.140

103

X0077XX00

S 300 - W2018Y030

S600 - W2018A060



RETRACTABLE TYPE FALL ARRESTERS:

This part of your safety system allows you to move freely within a certain distance during your work and absorbs the impact in the event of a fall. All devices are certified according to EN 360:2002, some of them are suitable for rescue purposes according to EN 1496:2007. SRL (self-retracting lanyard) devices are self-retractable, while winches are manually operated. IKAR line is an ultimate hi-end range with a variety of solutions to cover all possible needs. These sturdy, low-maintenance height safety devices with webbing or galvanized steel lifeline are offered mainly in aluminium case featuring a rotational attachment swivel to better ergonomics and long lifetime. IKAR devices function in any location position and have been tested in a simulated fall trial over an edge according to CNB 11.060 2008 sharp edge type A (with exception of HRA series). Connectors incorporate a fall indicator for easier inspection.

IKAR HWB



Retractable fall arrester with webbing lifeline and built-in shock absorber featuring rotating attachment point and double action connector.

- lightweight aluminium housing with a webbing lifeline
- swivel eye attachment point
- sewn in load indicator on lifeline
- additional testing against falls over edges (r≥0,5mm)
- light alloy double action hook on end of lifeline
- device can be attached to an anchorage point or safety harness

IKAR HWS 6 - A40005060

IKAR HWS 9 A4000S090

IKAR HWB 1.8 - A4000W018 IKAR HWB 2,8 - A4000W028 IKAR HWB 3.5 - A4000W035

IKAR HWS 12 - A4000S120

IKAR HWS 24 - A4000S240

 HWB 1.8 can be used as protection against falls in working cages of lifting platforms under specific conditions

Weight: 0.7kg / 0.8kg / 1.1kg Length: 1.8m / 2.8m / 3.5m Working load: 136kg €€ 0229, EN 360

IKAR HWS



Self-retractable arrester featuring a rotating attachment swivel and a connector with fall indicator and double action swivel hook.

- lightweight aluminium housing with a galvanised steel cable lifeline
- swivel eye anchor attachment point
- additional testing against falls over edges (r≥0,5mm)
- light alloy double action hook on end of lifeline

Weight: 3 kg / 3.7 kg / 5.4 kg / 8.4 kg Length:6 m / 9 m / 12 m / 24 m Working load: 136 kg

C€0229, EN 360



RETRACTABLE FALL ARRESTERS

IKAR H 33 - A4002BS33

IKAR H 42 - A4002BS42

IKARH

IKAR HRA

Self-retractable arrester featuring a connector with fall indicator and double action swivel hook.

- lightweight aluminium housing with a galvanised steel cable lifeline
- fixed handle anchor attachment point
- additional testing against falls over edges (r≥0,5mm)
- light alloy double action hook on end of lifeline

Weight: 18 kg / 27.2 kg Length: 30 m / 40 m Working load: 136 kg

C€ 0229, EN 360

IKAR HRA 12 - A4004BS12 IKAR HRA 18 - A4004BS18 IKAR HRA 33 - A4004BS33



Self-retractable arrester with built in two-way rescue/ recovery mechanism. Fall arrest device with rescue lifting and lowering facility, equipped with a recovery mechanism operated by a device mounted handle. After an arrested fall, or if the user becomes incapacitated at the bottom of a shaft, the recovery mechanism can easily be engaged by a second person to raise or lower the person to a place of safety.

- lightweight aluminium housing with a galvanised steel cable lifeline
- fixed handle anchor attachment point
- equipped with a release pin and a recovery mechanism operated by a device mounted handle
- light alloy double action hook on end of lifeline

HRA is not suitable for use over a leading edge and has not been edge tested. Weight: 11.5 kg / 21 kg • Length: 18 m / 33 m Working load: 136 kg

Weight: 7 kg / 11.5 kg / 21 kg Length: 12 m / 18 m / 30 m C€ 0229, EN 360, EN 1496

PROTECTIVE SLEEVE FOR SRL





PVC protective covers for self-retracting lifelines.

- sealed seamless construction protects a whole SRL from precipitation or aggressive environments
- prevents scratching or damage to labels when using a SRL horizontally
- equipped with a label access transparent window for easy pre-use inspections
- available in three sizes to suit different SRLs

A4072YX02 S IKAR HWB 1.8; HWB 2.8 and HWB 3.5 or similar A4072YX03 M IKAR HWS 6; HWS 9 and HWS 12 or similar A4072YX04 L bigger fall arresters like IKAR HWS 24 or similar

Weight: S 160 g • M 250 g • L 400 g Size: S, M, L • Material: PVC Dimensions: S 25x40 cm • M 30x60 cm • L 40x70 cm





DAVIT

Davit has a modular design that allows to build a system, which would precisely fit all possible applications in every confined environment. The swivelling davit sets are free standing or attachable to walls, tanks or other entrances. A simple plug-in mechanism allows quick and purposeful installation. In order to build your davit system, order a cantilever arm, choose from a range of fixed or temporary bases and sleeves and add required consoles for IKAR HRA self-retracting lanyards or PLW winch attachment. Designed with an integrated, easy to set fall brake system and the ability to mount mechanical devices as winches and retractable fall arresters, IKAR davits provide the customer with peace of mind for years to come.

IKAR AAS-1 CANTILEVER ARM

X4005XX00

Cantilever arm with permanent angle of 49° is developed for stationary use in safety and rescue cases for two persons, as well as for lifting and lowering loads.

- built-in 3 pulley systems redirect wire ropes from attachment point of the winch and SRL to confined space entry
- Cantilever arm is made from high quality V4A stainless steel
- Suitable for fast relocation from one sleeve to another due to foldable design of 2 detachable parts – upper davit and lower mast.
- Additional attachment point provides a possibility of attaching an SRL or fall absorber with lanyard to secure a cantilever arm operator or assistant.
- Suitable for two persons with load capacity of 300 kg

Height: 2,01 m • Reach: 0,74 m Weight: 28,7 kg C€ 0299 • EN 795:2012 Type B CEN/TS 16415:2013

X4006XX00



IKAR GROUND SLEEVE

Sleeve is designed to be installed onto the ground with pivot bearing made of durable PA.

Sleeve can be mounted on existing concrete surfaces using the recommended composite anchor system Type MKT VMZ-AA4 145 M16-30 / 200 ar steel constructions with screw connections M 16 grade 8.8. Material: stainless steel 1.4571 (V4A), PA Dimensions: 300 x 240 x 280 mm (length x width x height) Weight: 13,5 Kg EN 795:2012 Type A CEN/TS 16415:2013

IKAR WALL SLEEVE





Sleeve is designed to be installed onto the wall with pivot bearing made of durable PA.

Sleeve can be mounted on existing concrete surfaces using the recommended composite anchor system Type MKT VMZ-AA4 145 MI6-30 / 200 or steel constructions with screw connections M 16 grade 8.8. Material: stainless steel 1.4571 (V4A), PA Dimensions: 290 x 300 x 410 mm (length x width x height) Weight: 14,9Kg EN 795:2012 Type A • CEN/TS 16415:2013

108

X4009XX00

IKAR LOWER GROUND SLEEVE



Flush floor sleeve with 11/2" drainage pipe connection can be mounted to rebar before pouring concrete.

A concrete quality of at least B25 concrete must be ensured.

Material: stainless steel 1.4571 (V4A), PA Dimensions: 280 x 420 mm (width x height) Weight: 12 Kg EN 795:2012 Type A • CEN/TS 16415:2013

IKAR LOWER GROUND SLEEVE CORE HOLE

X4010XX00



Flush floor sleeve with 3/8" drainage pipe connection to be installed to existing concrete by core-drilling and resin fix. A suitable shrink-free grout is PCI swelling mortar with the designation "Grout 100".

Material: stainless steel 1.4571 (V4A), PA Dimensions: 160 x 335 mm (width x height) Weight: 4,6 Kg EN 795:2012 Type A • CEN/TS 16415:2013

FIXING MATERIAL FOR GROUND AND WALL SLEEVE

X4008XX00

X4011XX00



Composite anchor system Type MKT VMZ-AA4 145 M16-30 / 200 for IKAR ground and wall sleeve.

IKAR MOBILE GROUND BASE



Free standing base featuring quick and easy assembling on site.

The base consists of a central socket, height adjustable pairs or front and back legs secured with ball-lock pins. Cantilever arm rotates 360°.

Material: stainless steel 1.4571 (V4A), PA Dimensions: 1763 x 2228 x 450 mm (length x width x height) Weight: 23,4 Kg for central socket, front leg 8,1 kg each, back leg 9,2 kg each CE 0299 • EN 795:2012 Type B • CEN / TS 16415:2013



ANCHOR DEVICES

X4012XX00

IKAR MOBILE ATTICS BASE



Sleeve is designed to sit on the top of a concrete bund wall 200mm-400mm or container edges.

It is ideal for work areas where frequent assembly and disassembly is required. Material: stainless steel 1.4571 (V4A) Dimensions: 350 x 729 x 335 mm (length x width x height) Weight: 35 kg C€ 0299 • EN 795:2012 Type B • CEN/TS 16415:2013

IKAR WINCH CANTILEVER ARM CONSOLE

X4015XX00



Stainless steel bracket designed to fit IKAR PLW Winch to cantilever arm. Bolts directly onto the davit's arm and comes complete with fixings and stainless--steel fixing pin for the PLW winch. Material: aluminium Dimensions: 200 x 130 x 82,5 mm (length x width x height) Weight: 2,4 kg

CANTILEVER ARM CONSOLE

IKAR HRA 12-24 - X4013XX00 IKAR HRA 33 - X4014XX00





Stainless steel bracket designed to fit IKAR HRA recovery devices to IKAR Davit's mast. Bolts directly onto the davit' mast and comes complete with fixings and stainless--steel fixing pin for the device. Material: stainless steel 1.4571 (V4A) Dimensions: 264 x 162 x 250 mm (length x width x height) Weight: 3,5 kg (5 kg for HRA 33 version)

X4002XX00

IKAR DB-A3 TRIPOD



Portable tripod with adjustable locking legs and 3 intergated pulleys. Head construction allows a variety of leg angles and a safetychain-free design. Ideal for economical compliance in many basic confined space, fall arrest applications and resuce.

- Up to 2,54m high aluminium tripod with corrosion-resistant coating featuring 3 bolts-in anchor points
- 1,56 m in collapsed setup for transportation, weight is 24 kg
- 2 stage independently adjustable telescopic legs with stainless steel pins and foldable rubber shoes with spiked edges. The individually adjustable legs

are advantageous as they can be used on uneven ground

- 3 pullies built into a die casted head
- Tripod is designed to be used without support safety chain, which reduces a risk of tripping
- Suitable for two persons with load capacity of 300 kg
- Console and IKAR HRA not included

Height: min. 1,43 m, max. 2,54 m Diameter: min. 0,64 m, max. 2,19 m Weight: 24 kg C€ 0299 • EN 795:2012-10 Typ B • CEN/TS 16415:2013

X4004XX00



Aluminium bracket to connect an IKAR PLW Winch to IKAR DB-A3 tripod. Dimensions: 200 x 130 x 82,5 mm (length x width x height) Weight: 2.0 Kg

IKAR HRA TRIPOD CONSOLE

IKAR WINCH TRIPOD CONSOLE



IKAR PLW WINCH

Universal aluminium bracket to connect an IKAR HRA (up to 60m) to an IKAR DB-A3 tripod. Dimensions: 255 x 165 x 78 mm

(length x width x height) Weight: 1.8 Kg



A4064XX30



Hand crank winch for easy and jerk-free lifting and lowering of persons and loads according to Directive 2006/42/EG with 30 m stainless steel rope of Ø 6mm (min. breaking load 18.76 kN). SWL is 300 Kg. Material: stainless steel 1.4571 (V4A), PA Dimensions: 230 x 336 x 200 mm (length x width x height) Weight: 18,5 kg CE • EN 1808:2015

EVAQ HUB II



Descender and rescue device with lifting function for height rescue by fire fighters, industrial climbers and others when exposed to a danger at great heights such as cable cars, outdoor parks, wind power plants or skyscrapers. Also suitable for quick and easy rescue and even for self-rescue of many threatened people. Certified according to EN 341:2011 class 1A (2 persons), EN 1496:2017 class B (2 persons), ANSI Z359.4:2013 (1 person), EN 12841:2006 Typ C (1 person)

- designed for a working load of 225 kg (2 persons)
- automatic and redundant brake system consists of 2 fly wheel brakes
- brake drums are made of steel for high resistance
- equipped with a handwheel made of durable plastic for easy and save operation even in hard conditions and under a full load
- three stainless steel eyebolts ensure smooth descend speed control and multiple operation modes
- back side rope clamp facilitates lifting operation
- to make the lifting easier the device is equipped with a 10 mm hexagon adapter for accu-drill connection

- attachment point is equipped with a steel double trigger automatic locking connector with a gate opening of 21 mm
- static polyamide kernmantle rope can be up to 500 m long
- both ends of the rope are equipped with a stitched eye and a steel double trigger automatic locking connector with a gate opening of 21 mm
- for a storage and transport we recommend a shock and waterproof plastic PROTECTIVE CASE in two sizes with a volume of 17 and 46 litres or a storage RESCUE BAG with a volume of 30 litres
- when the device is stored in a sealed protective case an annual inspection is easier without the necessity of dismantling this device. It may be carried out by a competent person.

Weight: 3.9 kg (138 oz) + rope Working load: 30 – 225 kg (66 – 495 lb) designed for 2 persons Length: descent height max. 500 m (1640 ft) Descending speed: 1,0 m/s with 85kg and approx. 1,5 m/s with 170kg Temperature range: -40 °C to +65 °C C € 1019 • EN 341:2011 – 1A, EN 1496:2017 – B, EN 12841 Type C, ANSI Z359.4:2013

EVAQ ROPE



Rope for the EvaQ II a EvaQ HUB II rescue devices

- length according to the customer's request, max. 500 m
- both ends of the rope are equipped with a stitched eye and a steel double trigger automatic locking connector with a gate opening of 21 mm

Material: polyamide Diameter: 9.6 mm EN 1891A W1520X

EVAQ CASE WITH SEALING




Singing Rock offers devices for height rescue EVAQ II and EVAQ HUB II stored in a sealed PROTECTIVE CASE. Sealing is used to avoid laborious annual inspections of the complex rescue device. Only a visual inspection by a competent inspector without the necessity of dismantling the device is needed in case the seals are not damaged.

with EVAQ HUB II - W1522

W1522S / EvaQ HUB II, Protective case 17, seals – up to 40 m of rope W1522L / EvaQ HUB II, Protective case 46, seals – 40-120 m of rope


For bigger size case option, please contact Singing Rock.

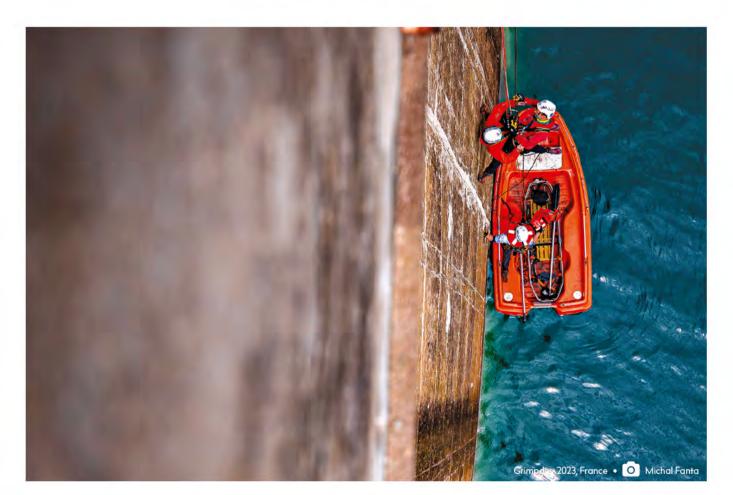





OPEN SLING 14MM

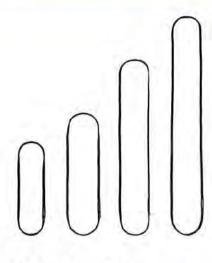

OPEN SLING

Compact sewn loop made of two-layer material.

- minimalist, strong and durable
- constructed from two parts, where the strength core is woven into the cavity
- the outer material protects the colored core, in case
- of damage is visible • sewing color according
- to length
- suitable for anchoring and connecting when working at heights
- available also in black only (anthracite sewing)

Width: 14 mm Strength: 25 kN Material: 90% PES, 10% PA Deviation in length: 60, 80 cm +/- 2 cm; 120, 150 cm -2 / + 4 cm

code	length	sewing color
W2005Y060	60 cm	yellow
W2005A080	80 cm	blue
W2005R120	120 cm	red
W2005W150	150 cm	white
W2005B060	60 cm	anthracite
W2005B080	80 cm	anthracite
W2005B120	120 cm	anthracite
W2005B150	150 cm	anthracite

C€1019 • EN 354 • EN 7958 • EN 566

W2001

W2005

Sewn sling for creating the anchor point. Width: 20 mm Strength: 22 kN Length deviation: 60, 80 cm +/- 2 cm 120, 150 cm -2/+4 cm Material: PA

	[cm]	linl	kN	type
W2001*060	60	24	22	Cum
W2001*080	80	32	22	
W2001*120	120	47	22	C sam
W2001*150	150	60	22	

C€1019 • EN 566 • EN 795B • EN 354

W2004

EYE SLING



Sewn sling from two layers of webbing and with a wear indicator. Width: 23 mm Strength: 30 kN Length deviation: 60, 80 cm +/-2 cm 120, 150 cm -2/+4 cm Material: PA

	[cm]	[in]	kN	type
W2004*060	60	24	30	
W2004*080	80	32	30	
W2004*120	120	47	30	
W2004*150	150	60	30	

116

SLING LANYARD



Sewn sling from two layers of webbing and with a wear indicator. Width: 23 mm Strength: 22 kN Length deviation: 60, 80 cm +/- 2 cm 120, 150 cm -2/+4 cm Material: PA

	[cm]	[in]	kN.	type
W2016*060	60	24	22	Cmm_mm2
W2016*080	80	32	22	Cum mur2
W2016*120	120	47	22	Caun
W2016*150	150	60	22	CHHL.mm2

W230

W2001



Lanyard "I" for
creating the anchor
point or the connection
device.
Available also with
sewn connectors K370
and K353.
Rope diameter: 10.5 mm
Length deviation: 60,
80 cm -2/+3 cm
120, 150 cm -3/+5 cm
Strength: 22 kN

and the second second	[cm]	[in]	kN	type
W2300*060	60	24	22	0
W2300*080	80	32	22	er
W2300*120	120	47	22	87-08
W2300*150	150	60	22	er
W2301*060	60	24	22	K3702PP
W2301*080	80	32	22	K3702PP
W2301*120	120	47	22	K3702PP
W2301*150	150	60	22	K3702PP
W2303*060	60	24	22	K3536PP00
W2303*080	80	32	22	K3536PP00
W2303*120	120	47	22	K3536PP00
W2303*150	150	60	22	K3536PP00

€ 1019 • EN 354 • EN 795B

W2200

LANYARD "V"

LANYARD "I"



Lanyard "V" to create the connection device. Rope diameter: 10.5 mm Length deviation: 25/45, 25/65 cm -2/+3 cm 100/100 cm -3/+5 cm Strength: 22 kN

	[cm]	[in]	kN	type
W2200*001	25/45	10/17	22	-
W2200*002	25/65	10/30	22	-
W2200*100	100/100	40/40	22	
C€ 1019 • EN 354				



SLINGS AND LANYARDS

8mm - W2608

10 mm - W2610

TIMBER ACCESSORY CORD

With sewn eyes.

rope diameter 8 and 10 mm

the use of the PES/TECHNORA material combination results in a better thermal and mechanical resistance of the sheath Length:

diameter 8 mm - 75, 80, 85, 100 cm diameter 10 mm - 80, 85, 90, 100 cm Strength: 18 kN (8mm) 20 kN (10 mm)

C€1019 . EN 795B

PRUSIK SLING



Sewed accessory cord with a diameter 8 and 10 mm for wide use at tree care and rescue operations.

- well knotted for easier work at height and for more comfortable installation of Prusik knot
- suitable also as an anchor sling, adjustment sling and for the hauling systems

W2603YB00

Color: red/white (8 mm), yellow/black(10mm) Diameter: 8 and 10 mm Length: 38 cm • 15 in Strength: 18 kN Working load: max. 1 person Material: PES, Technora Weight: 48g • 1.7 oz (8 mm), 70 g • 2.5 oz (10 mm)

CE1019 . EN 795B

PULLEY SLING



Prusik sling with the stitched pulley SMALL for creating the anchor point.

- sling with the pulley is suitable to use • as a textile blocking device for wide use mainly at the tree care and rescue operations
- spare part for BARK PULLEY SAVER
- suitable also for other work at height as an anchor point

Strength: 18 kN Length: 40 cm • 15.7 in Diameter: 10 mm Working load: max. 1 person Material: PES, Technora, light alloy Weight: 160g • 5.6 oz C€ 1019 • EN 795B

8mm - W2601R085 10mm - W2602Y085

W2604RR00

RING SLING



Well knotted prusik sling with stitched ring with 28 mm diameter for creating the anchor point.

- sling with the ring is suitable to use as a textile blocking device for wide use mainly at the tree care and rescue operations
- spare part for BARK RING SAVER
- suitable also for other work at height as an anchor point

Strength: 18 kN Length: 40 cm • 15.7 in Diameter: 10 mm, ring 28 mm Working load: max. 1 person Material: PES, Technora, light alloy Weight: 115 g • 4 oz C€ 1019 • EN 795B

JINGLE II



Cambium saver intended for use in tree climbing as anchor device and belay anchor. The different size of the rings enables easy and quick installing and removing of the sling from the ground. As well suitable in industry as an anchor device.

- length of the slings with "O" ring – 100, 120, 150 cm
- strength 25 kN
- inside and outside diameter of "O" rings: ALU: big 46/70 mm, small 28/52 mm steel: big 58/78, small 38/57

- 3 layers of webbing sewn together
- red colour of webbing for better visibility

steel ring – W1040R ALU ring – W1041R without ring – W1042R

 available with aluminium "O" rings or without "O" rings.

<€1019 • EN 795B



119

SLINGS AND LANYARDS

W2113Y

ALU RING - W2111Y

STEEL RING - W2112Y

PATRON LANYARD





Dynamic rope lanyard with stitched eyes at the ends for work positioning and anchoring at the tree care.

- suitable to use with the mechanical adjustment devices and also with friction hitches (Prusik knot)
- dynamic rope 11mm guarantees smooth adjustment and in case of fall higher impact force absorption
- strength stitching is covered with plastic cover for higher abrasion resistance and easier pulling from the tree top
- suitable also for other work at height as the anchor device
- available in 3 versions, with light alloy ring, steel ring or without a ring

Color: yellow Strength: 22 kN Working load: max. 1 person Material: PATRON LANYARD ALU RING – PA, light alloy, PVC PATRON LANYARD STEEL RING – PA, steel, PVC PATRON LANYARD – PA, PVC

Length and weight:

PATRON LANYARD ALU RING 1.25 / W2111Y125 / 125 cm • 49 in , 215 g • 7.6 oz

PATRON LANYARD ALU RING 1.50 / W2111Y150 / 150 cm • 59 in, 235 g • 8.3 oz

PATRON LANYARD STEEL RING 1.25/ W2112Y125 / 125 cm • 49 in, 292 g • 10 oz

PATRON LANYARD STEEL RING 1.50 / W2112Y150 / 150 cm • 59 in, 315 g • 11 oz

PATRON LANYARD 3.5 /W2113Y350/ 350 cm • 11.5 ft., 345 g • 12 oz

PATRON LANYARD 5.5 /W2113Y550/ 550 cm • 18 ft, 540 g • 19 oz

PATRON LANYARD 60 / W2113Y060 / 60 cm · 24 in, 105 g · 3.7 oz

PATRON LANYARD 80 / W2113Y080 / 80 cm · 31.5 in, 120 g · 4.2 oz

PATRON LANYARD 120 / W2113Y120 / 120 cm · 47 in, 155 g · 5.5 oz

PATRON LANYARD 150 / W2113Y150 / 150 cm · 59 in, 185 g · 6.5 oz

C€ 1019 • EN 795B • EN 354

BARK PULLEY SAVER

W2115



Adjustable cambium saver intended for use in tree care operations.

- adjustable length and possibility to exchange the parts of the cambium saver in case of damage
- pulley sling allows smooth and fast movement in a tree top
- steel plush (22 mm diameter) with accessory cord allows to remove the cambium saver from the ground
- available in two lengths

Length: 1.25 and 1.5 m • 4 and 4.9 ft. Weight: 470 and 495g • 16.6 and 17.5 oz

Set includes:

- W2112 PATRON LANYARD STEEL RING
- W2603YB00 PULLEY SLING
- sheckl
- W2118XX00 retrival plaque with accessory cord

W2116

BARK RING SAVER



Adjustable cambium saver intended for use in tree care operations.

- adjustable length and possibility to ex-
- change the parts of the cambium saver in case of damage
- removing the sling with pulling ball with a diameter 32 mm or tieing a barrel knot at the end of the rope
- available in two lengths

Length: 1.25 and 1.5 m • 4 and 4.9 ft. Weight: 318 and 340 g • 11.2 and 12 oz

Set includes:

- W2112 PATRON LANYARD STEEL RING
- W2604RR00 RING SLING

ARBO SITE



TREE ANCHOR

Work positioning lanyard specially intended for tree care operations.

- allows smooth length adjustment thanks to the use of friction knots (Prusik knot) and pulleys
- the advantage of this set are two strength stitched eyes which allow to create two independent work positioning lanyards
- the set is delivered in two lengths and is ready to use
- each component is replaceable in case of damage

W2117

- Work positioning set includes: • W2117 PATRON LANYARD
- W2608 TIMBER ACCESSORY CORD
- RK806BB00 pulley MIKY
- K0122BB07 2x carabiner OXY/TRIPLE LOCK

Length: 3.5 and 5.5 m • 11.5 and 18 ft. Weight: 638 a 860 g • 22.5 and 30 oz C € 1019

Note: This set is not certified according to EN 358, as it consists of removable components. However, it is generally recognized according to Arboricultural Organizations (ISAs) and working practices.

W2114



Connection and anchor device for work at height. Multipurpose anchor device for creating the anchor point mainly on the tree. Designed for the arborists and rescue.

- static rope with a diameter 11 mm
- stitched steel ring (diameter 38 mm) at one rope end for variable use
- strength stitching is covered with plastic cover

Strength: 22 kN Diameter: rope 11 mm, ring 38 mm Working load: max. 1 person Materiál: PA, steel, PVC Length: 5 m Weight: 525 g • 18.5 oz C€ 1019 • EN 795B • EN 354

TRACK PLUS		
TRACK PLUS		W1036W130
	Adjustable anchoring strap and work positioning lanyard • length adjustment from 80 to 130 cm	
	<€1019 • EN 354 • EN 358 • EN 795 B	
ADJUST		W1047Y100
	 Adjustable lanyard with steel single buckle and textile handle which allows adjusting a length under the tension. strong and resistant 25 mm wide web- bing, eye with a protector for any EN 362 connector, big steel buckle for adjusting a length of the lanyard full strength textile handle for easy adjusting a length of the lanyard (guaranteed safety of this loop in case of wrong attachment) attachment light alloy ring with the inner diameter of 28 mm identification label for product traceability 	Weight: 240 g • 8.5 oz Material: PES • Strength: 22 kN Width: 25 mm • 1 in Length: 80–145 cm • 32-57 in C€ 1019 • EN 354 • EN 358 • EN 795 B
FLAT WEBBING		C0035AOI
	 width of webbing 16 mm (0.63 in) made of low stretch PES max. length 120 m (393 ft) weight: 37,7 g /m strength: 15 kN C€ 1019 • EN 565 	
		black – C0037BBI




- width of webbing 20 mm (0.79 in)
 made of low stretch PES

- max. length 120 m (393 ft)
 weight: 38,2 g/m (black), 39,4 g/m (red)
 strength: 16 kN (black), 17 kN (red)

<€1019 • EN 565

FINE LINE

MOBILE ANCHORING SYSTEM

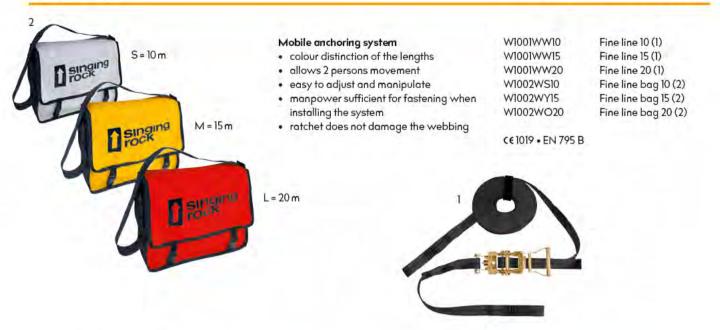

RESCUE RATCHET



vard with

Quick and easy to deploy haul lanyard with ratchet for rescue purposes. It is intended to lift up the victim from the fall protection line.

Color: red Weight: 680 g • 24 oz Material: PES, galvanized steel Strength: 22 kN Width: 35 mm Length: 25–115 cm • 31–45 in C€ 1019 • EN 354

AXILLAR

W0003BY09

W1052XX00

Rescue sling to secure evacuated persons against accidental fall during the rescue action (e.g. ski lift evacuation). Weight: 385 g EN 1498 type A







SLINGS AND LANYARDS

STEEL ANCHOR

300 cm - RK851XX03 500 cm - RK851XX05



Steel anchoring device ideal for tree care or welding at height.

- Steel wire cable with the diameter 6 mm is protected by thick PVC tube. Outer diameter of the tube is 13 mm.
- available in two lengths with different loop colors

Material: zinc plated steel covered by PVC Strength: 15 kN Length: 300, 500 cm • 9.8 ft, 16.4 ft Weight: 730 g • 25.8 oz 1150 g • 40.6 oz C€ 1019 • EN 795B

STEEL LANYARD "I"

yellow - RK850X100 blue - RK850X130 red - RK850X180



Steel connecting and anchoring device ideal for tree care or welding at height.

- Steel wire cable with the diameter 6 mm is protected by thick PVC tube. Outer diameter of the tube is 13 mm.
- both ends finished with a fixed eye
- combination of very good strength and durability
- available in three lengths with three different loop colors
- unique production number

Material: zinc plated steel covered by PVC Strength: 15 kN Length: 100, 130 and 180 cm • 39, 51 and 71 in Weight: 295 g • 10.4 oz • 350 g • 12.3 oz • 460 g • 16.2 oz C€ 1019 • EN 354 • EN 795B

Length: 140 cm (55 in)

Weight: 140 g • 4.9 oz C€ 1019 • EN 566 • EN 354 C2151BY00

JACOB DYNEEMA



Versatile and ultra light ladder,

- used for aid climbing and work at height
- any cell may be loaded in any directions, which can become useful in emergency situations
- strength of each loop 22 kN
- may be also used as an open sling for the anchoring

JACOB

C2150BY

W1024BX

complete - W1025BX



Ultra light six step ladder. Steps reinforced with a plastic to hold its shape even under the load.

Maximum load: 500 kg. Maximum load for grab loop 100 kg. Length: 150 cm (59 in) Weight: 210 g • 7.4 oz

FOOTER II



Ascender webbing for rope access.

- big loop for easy releasing the webbing
- small loop for the attachment to the carabiner
- · reinforced step loop
- FOOTER II COMPLETE is including
- the mini D screw connector

Min. length: 40 cm (16 in) Max. length: 140 cm (55 in) Weight: 90 g • 3.2 oz / 125 g • 4.4 oz (complete) Max. load: 150 kg

SLINGS AND LANYARDS

W1051BX

FOOTER XP



TOOL HOLDER

Lightweight ascender loop made from 6 mm accessory cord.

- webbing in the buckle simplifies the length adjustment
- XP buckle allows to adjust the length even when loaded
- big hole in the buckle for the attachment with any type of carabiner
- reinforced step loop is equipped with an elastic strap which keeps the proper position of the foot
- Min. length: 30 cm (12 in) Max. length: 170 cm (67 in) Weight: 105 g (3.7 oz) Max. load: 180 kg Material: PAD, light alloy

W1028BY00



Elastic sling to attach the tools to the harness which makes the loss of the tool impossible.

- designed to provide comfortable work while
- working with the tools at height
- high durability and flexibility
- steel weldet eye
- length of the sling can be extended up to 130 cm

Material: PES, PAD, steel, elastic fibre Load capacity: 25 kg Weight: 30 g • 1.06 oz Lenght: 70 cm, (130 cm fully extended)

Never use this sling for belaying!

TOOL HOLDER MAX





Elastic sling for attaching heavier tools to the work harness.

- prevents tools from falling when working at heights
- stainless steel ring with 40 mm inner diameter for connection to the harness material carabiner (PORTER)
- suitable for chain saws and other tools up to a maximum weight of 10 kg

Length: 85–150 cm • 33,5–59 in Weight: 95 g • 3,4 oz Load capacity: 300 kg • 660 lb Material: PAD, elastic fibre, steel

W4400WW00

REACTOR 140





Shock absorber used primarily by workers on a structures, ladders and pylons. Lightweight, practical shape does not restrict users at the work. Newly designed for users with a maximum weight of 140 kg (including equipment).

- designed to safely capture a person weighting 140 kg (including equipment)
- maximum active breaking length of shock absorber is 175 cm
- optional length of lanyards for diverse work
- zipper around the perimeter of the cover for easy inspection of the energy absorber
- intact, orange indicator of energy absorber activation

- any EN 362 certified connector can be sewn into the attachment loop
- orange indicator is threaded through the attaching loops and indicates an actual damage
- cover is made from black synthetic rubber and Cordura with PU coating
- oval shape for easy grip
- different webbing lengths are produced on customer's request

Weight: 170 g • 6 oz (without any connector and lanyards) WLL: 140 kg €€ 1019 • EN 355



	Туре	Code	Connector	Length [cm]	Weight [g]	RFU 11.07
\cap	1.	W4410W085		85	250	1
	"I" 85 cm	W4411W085	K370	100	400	1
9	"I obui	W4412W085	K353	110	750	1
1 -		W4413W085	K355	120	1230	1
1.	1	W4410W155		155	290	4
10	"l" 155 cm	W4411W155	K370	170	440	1
	"t, 122 QH	W4412W155	K353	180	830	1
	-	W4413W155	K355	190	1270	
\cap	1	W4420W085		85	210	1
N	Million .	W4421W085	2x K370	100	610	1
A	"Y" 85 cm	W4422W085	2x K353	110	1290	1
1 🖉		W4423W085	2x K355	120	2210	1
0	1	W4420W155		155	390	
(No	in the second second	W4421W155	2x K370	170	690	1
1-	"Y" 155 cm	W4422W155	2x K353	180	1390	1
		W4423W155	2x K355	190	2310	4
0	EYE "Y"	W4430W155		155	390	1
(3	155 cm	W4433W155	2x K355	190	2310	4
	1 11	W4440W155		155	530	×
0	RING "Y" 155 cm	W4441W155	2x K370	170	B30	×
0		W4442W155	2x K353	180	1510	×
	-	W4450X085		85	290	×
1 9	ROPE"I"	W4452X085	K353	110	790	×
\bigcirc	85 cm	W4453X085	K355	120	1260	×
	1	W4450X155	-	155	370	×
•	ROPE "I"	W4452X155	K353	180	870	×
-	155 cm	W4453X155	K355	190	1340	×
		W4460X085		85	400	×
11 7	ROPE"Y"	W4462X085	2× K353	110	1400	×
V	85 cm	W4463X085	2× K355	120	2340	×
		W4460X155	1,1,000	155	520	×
•	ROPE"Y"	W4462X155	2× K353	180	1520	×
	155 cm	W4463X155	2× K355	190	2460	×
		W4470Y100		100-160	420	×
100 million (1990)	-	W4471Y100	1× K370	115-175	570	×
9-0	ADJUST	W4472Y100	1× K353	125-185	920	×
		W4474Y100	1× K0124	115-175	537	×
	1	W4480X085	IN KUIZH	85	330	×
0	1-12	W4482X085	2× K353		1355	×
I V	FLEX "Y" 85 cm	W4482X085		110		
•		1	2× K355	120	2255	×
	-	W4484X085	2× K0124	100	565	×
0	1.1	W44B0X155	a 1000	155	430	×
1 V	FLEX "Y" 155 cm	W4482X155	2× K353	180	1425	×
1 👸 155 cm	W4483X155	2×K355	190	2350	×	



FALL ABSORBERS

70 cm - W4100Y070 120 cm - W4100Y120 160 cm - W4100Y160

JOULE



Fall absorber

The fall absorber Joule presents optimal solution for securing persons working on horizontal constructions and roofs. Joule is activated after reaching the load of 2 kN (200 kg).


Minimal guaranteed strength after the breaking action is 15 kN.

C€ 1019 • EN 355

JOULE 70 is possible to use with the fall absorber LOCKER, for working situation which requires longer distance from the safety line.

EN 353-2, EN 355

This is not a final product, this set is necessary to set up from the separate parts.






singing rock

ROOFER SET

ROOFER SET 10 - M0020X1 ROOFER SET 20 - M0020X2

Roofer set is ideal for those, who are fully devoted to roofing. It allows you to position yourself on a roof with up to 45° angle to prevent a possible fall due to slippage or breaking of a structure.

Set contains:	
W0091BY	ROOF MASTER
W1011WB20	SITE – Locker+Static 11mm,
	(ROFER SET 10 - 10 m,
	ROFER SET 20 - 20m)
W2016X120	Sling lanyard 120, 22 kN
	(double safety sling)
K0122EE07	OXY triple lock
K4241ZO07	STEEL OVAL carabiner,
	Triple Lock
S9000YY35	GEAR BAG 35 L YELLOW

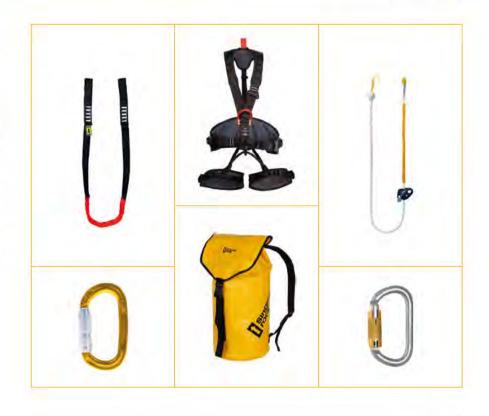

FALL ARRESTER SET

Set intended for work restraint situations or attaching to anchor lines. Versatile and lightweight set contains:

Set contains:	
W00895Y	BASIC HARNESS
W4100Y160	JOULE 160
	Fall absorber
K4241ZO05	STEELOVAL
	CARABINER, SCREW
	GATE 2x
W0052B010	WORKING BAG 10L

M0022XX



SETS

M0021XX

SCAFFOLDER SET

Scaffolder set is intended for those, who install scaffolds or work on tall structures and towers. It allows you to reach safely a place of work and position there for work.

Set contains:	
W0063BB	Technic harness
W4442W155	Reactor 140 RING "Y" 155 cm
	+ 2xK353
W1012WB02	SITE 2M + K370
K0122EE07	OXY triple lock
K4241ZO07	STEEL OVAL CARABINER,
	TRIPLELOCK
W1023YY00	MONTY BAG YELLOW

singing

PPE INSPECTION SET

W1023	Monty bag		
X0013XX02	Wire (diameter 2mm)		
X0015XX00	Marker of textile PPE		
X0016XX00	Gas Hot Knife		
X0017XX00	Sliding Gauge		
X0018XX00	Measuring Tape		
X0023X200	Silicone oil		
X0020XX00	Illuminated magnifier		
X0004GB00	Thermocutter		
L9991WB	Periodic control labels		
	+ plastic films		
X0014XX00	File		
X0021XX11	Sticker PPE inspection		
	next control		
X0022XX11	Sticker PPE inspection		
	unsatisfactory		

equipment for periodic PPE control

M0000XSET

C HOLEY OF	/	/	
, min			
		/	indegenaal

Sets



CABLEWAY EVACUATION SYSTEM

MK006

SETS

Complete evacuation set of personal protective equipment for work at heights for one rescue team carrying out the evacuation of persons from a chairlift or gondola.

- evacuation system is designed to be used by two rescuers
- set includes the EASY LIFT rescue pulley
- basic recommended gear is completed with optional equipment according to client's specific needs
- adequate knowledge of the safeguards and methodologies for using the products included in the system is essential for safe ski lift evacuation
- fulfils the Regulation EP and R (EU) 2016/424

<€1017

Set includes:

fullbody harness fall absorber Y small maillon oval Giga connector HMS carabiner Easy Lift pulley Maillon Figure eight Evacuation triangle Sling chest sling Axillar Static rope 11 mm Helmet Gear bag Protective gloves

Additional gear according the type of cableway: Descender Static rope 11 mm, 5m, 2 yeas for descender SIR HMS carabiner Baby Rescue Bag Laika - dog rescue harness





RESCUE SET

with 30 m rope - M0030X030 with 50 m rope - M0030X050 with 100 m rope - M0030X100

Rescue set is a perfect easy-to-use solution for rescuing the casualty from the fall arrest line and lowering him/her safely down.

Set contains:

- Rescue ratchet
- SIR
- Static R44 11 red with one stitched eye and one sealed rope end
- 1x Oval Steel Connector Triple Lock
- 1x Hector Triple lock black connector
- Maillon Big Delta
- STEEL LANYARD "I" 130cm
- GEAR BAG red 351 for 30 and 50 m rope, 501 for 100 m rope











BAGS

351 black - S9000BB35 351 yellow - S9000YY35 351 red - S9000RR35 50 l black – S9000BB50 50 l yellow – S9000YY50 50 l red – S9000R50

GEAR BAG

TARP DUFFLE



Transport bag for your gear

- waterproof, durable and washable
- very convenient to carry your gear
- takes up little space and stays dry
- transparent pocket (A4) on the top flap for your documents
- intended for speleology and working at heights
- minimum amount of seams
- main seams feature HF welding

Colors: yellow, red and black Capacity: 35 and 50 litres Material: PVC Weight: 700 g • 24.7 oz – 351 version

> 70 litres - C0046BB70 90 litres - C0046BB90 120 litres - C0046B120

> > C0073BY00



MOVEMENT BAG



from a durable laminate material, the TARP

Expedition bag 70, 90, 1201

DUFFLE is an almost indestructable bag. Resilient enough to be roughed up in-flight, or to be transported up a mountain via a yak or off-road vehicle, this is one burly duffel bag. For longer trips, grab the 120 litres size so you have enough room for all your gear

It's not your average duffel bag... Made

- Alpine-cut shoulder straps
- Dual daisy chains
- Twin haul handles on ends
- Rugged construction with extra bartacks and double stitching
- Four compression straps

- Internal mesh pockets
- Pocket on top

Capacity: 70 |, 90 |, 120 | Color: black Max. load: 20 kg, 23 kg, 23 kg Weight: 1820 g (70 1), 2270 g (90 1), 2720 g (120 I) Material: PVC

Resistant traveling bag with the wheels for your climbing adventures, business trips or work at height missions.

- large u-shaped opening with heavy duty double zippers provides easy access to contents. Zippers can be easily locked with a padlock
- convenient side pocket allows you to keep e.g. footwear separate from clothing
- durable webbing straps and grab handle with reinforced stitching
- smooth rolling with all-terrain wheels for effortless mobility
- durable internally constructed push button locking handle adjusts to multiple heights for comfort whether gliding or pulling the bag

- side organization pocket for all of your travel needs
- heavy-duty PVC fabric backing
- rubberized, textured corner protectors guard agains wear and tear at critical contact points
- plastic piping reinforce high friction zones
- one internal accessory pocket provide easy packing organization

Dimension: 77 x 39 x 38 cm • 30.3 x 15.4 x 15.0 in Capacity: 110 litres Max. load: 23 kg Weight: 4600 g (10.1 lb)

C0001YY00

CARRY BAG



CUBE

DRY BAG

NEW

Practical bag intended for storage and transport of ropes as well as other gear.

- made from durable and washable material
- plastic reinforcements keep the bag self-standing
- due to its shape it is easy to store the rope and rigging tools properly
- very convenient to carry your gear
- reinforced ergonomic plastic handle to haul the bag
- loop on the bottom to shake out the gear and dirt
- water resistant
- side pocket for the accessories
- 2 steel rings for shoulder strap to carry the bag easily
- fast closing system

Color: yellow/black Dimension: 30x40(58) cm Max. load: 28 kg Capacity: 28 + 101 Material: PVC Weight: 940 g • 33.16 oz

W9005YB00

If you're a fan of cubes, origami, and the colors yellow and black - this is the perfect product for you! In this folding box, your throw line won't get tangled and will always be ready for use.

- tilt-up divider allows easy storage and transport of 2 throw lines
- 4 internal mesh pockets are available for storing throw bags
- interior also offers 2 velcro straps for securing the end of lines and 4 textile loops for other equipment
- free-standing construction and large opening ensure easy handling of contents
- bottom is made from water-resistant material
- reinforced seams and heavy-duty fabric sides ensures a long lifetime

- closure in folded state is secured by plastic buckles
- this box will keep your throw line kits clean and prevent their tangling during transport
- you can also use it to store other stuff in your car or workshop

Dimension: 36,5 x 36,5 x 36 cm • 14.4 x 14.x x 14.2 in folded: 36,5 x 36,5 x 4 cm • 14.4 x 14.4 x 1.6 in Weight: 1185 g · 41.8 oz Volume: 48 I Max. load: 5 kg · 11 lb Color: yellow/black Material: PES, PVC, velcro, plastic

> S9001YX40 - 401 S9001BX60 - 601



Dry bag with detachable shoulder straps intended for complete waterproof protection of your gear.

- classic rolling system with an additional guide bar
- retaining rings against unwanted opening of the closure buckle
- washable extra-durable PLASTEL[®] fabric, UV and waterproof resistant
- metal D-ring for safety attachment
- easily detachable foam padded shoulder straps
- color differentiation of the bag volume

Color: yellow (40 l), black (60 l) Weight: 750 g • 26.5 oz (± 15 g • 0.5 oz) (40 l) Material: PVC, PE Volume: 40 or 60 litres

DRY DUFFLE

RESCUE BAG

Water resistant dry duffle that opens fully across its length so you can get to your compartment without having to unload half your stuff.

- Classic rolling system with additional guide bar
- Large top access to the compartment
- Quality fasteners to fix the closure and adjust the volume
- Daisy chain for fixing and attaching further gear
- Closure buckles on both sides to prevent unwanted opening
- Additional handle for short distance transfers
- Removable foam padded shoulder strap
- Colour differentiation of the bag volume

Color: yellow (40 L), black/yellow (60 L) Weight: 780 g • 27.5 oz (40 L) 1040 g • 36.7 oz (60 L) Size: side Ø 27 cm, length 55 cm [40 L] side Ø 30 cm, length 70 cm [60 L] Material: PVC, PE

40 litres, yellow - S9003YY40

60 litres, black/yellow - S9003YB60

Volume: 40 or 60 litres

W9003RX45



Storage bag with a capacity of 30 litres

- ideal for long term storage of rescue
- equipment
 made of waterproof and washable material
- zippered transparent pocket on the side for documents/list of contents in A4 format
- adjustable shoulder strap
- fast opening/closing with a durable toggle

Weight: 1000 g (35.3 oz) Material: PVC Volume: 30 litres

PROTECTIVE CASE

17 litres – W9002XX17 46 litres – W9002XX46



Shock and water proof plastic box for your gear.

PROTECTIVE CASE 17 litres: Outside dimensions L x W x H: 40 x 30 x 22.3 cm Inside dimensions L x W x H: 34.3 x 22.3 x 20.5 cm Lid + bottom depth: 3.9 + 16.6 cm Weight: 1.74 kg PROTECTIVE CASE 46 litres: Outside dimensions L x W x H: 60 x 40 x 27.8 cm Inside dimensions L x W x H: 51.8 x 31.8 x 25.9 cm Lid + bottom depth: 4.8 + 21.1 cm Weight: 3.44 kg

BAGS

W1023

MONTY BAG



TRIPOD BAG



Durable bag with a reinforced bottom to protect a tripod from mechanical damage during transport and against weather conditions.

- shoulder straps allow easy transport of a tripod to a workplace
- zippered top access into the bag
- durable material for higher mechanical resistance due to double-layer PVC sheath

Bag for your gear and documents

- adjustable shoulder strap
- made of high resistant and durable fabric POLYMAR
- washable
- durable material
- · colors: grey, yellow, orange, red

A4070XX00

W9004YX00

Material: PES + PVC 600g/m² PES with double-layer PVC 1400g/m² (reinforced bottom) Dimension: 160 x 30 cm Max. load: 30 kg Volume: 110 l Weight: 2 kg - 4.4 lb

TOOLKIT



Special bag to carry fasteners and tools for work at height.

- Belt loop to attach the toolkit to the worker at height.
- Slots for a carpenter's square.
- Closure system of the pockets to prevent falling of small items when working at heights.
- Hammer loop.
- Pockets for small items.
- Two-level loops to attach the toolkit to the harness.
- Main compartment for tools.
- Side organizer for a utility knife, a screwdriver, pencils etc.
- It is possible to carry the toolkit on a belt.

Color: yellow-black Dimension: 23 x 20 x 8 cm – main compartment + outside slots and pockets Max. load: 10 kg Weight: 650 g (23 oz)

TOOL BAG

W0008BS



Hardware carrier and organizer

- made of high resistant and durable fabric POLYMAR
- · inside and outside pockets for hardware
- intended to be atached directly to the harness via carabiner or using additional waist belt
- well arranged
- easy to maintain Max. load: 10 kg
- Dimension: 23 x 23 x 9 cm



W0052B010 XL - W0052B012

WORKING BAG



Transport bag for working harnesses – also suitable as a gear bag for tools

- made from high abrasion resistant materíal PES 600 g/m2
- simple closing system with a plastic buckle
- net on the bottom for better airflow (the bag is not waterproof)
- transparent pocket for the name tag or instruction of use
- wide opening for easier putting in the harness or gear
- inside stichting covered by lace webbing
- suitable for 30m rope (10.0 mm)

Color: black Weight: 125 g / 130 g • 4.4 oz / 4.6 oz Material: PES Capacity 10 / 12 litres

W1026BB

URNA



Leg rope bag

- for rappeling in the extreme conditions to have the rope under the control
- can be also used as a tool bag when working at the height
- easy to put on the user's leg and the harnesses with the plastic buckle
- made from high quality material
- max length of the rope 50 m of the diameter 11,5 mm
- inside loop to tie the end of the rope
- easy closing system allows to feed the rope slowly

- the bag can be completely closed to avoid loosing the tools
- side pocket for small items or for the notebook

Color: black Capacity: 11 litres Weight: 240 g • 8.5 oz


ROPE BAG



With removable sheet.

- sheet dimensions 137 x 137 cm
- sneer almensions 137 x 137 cm
 hidden pocket for keys and money
 well-padde shoulder straps
 abrasion resistant material

Weight: 620 g • 21.87 oz

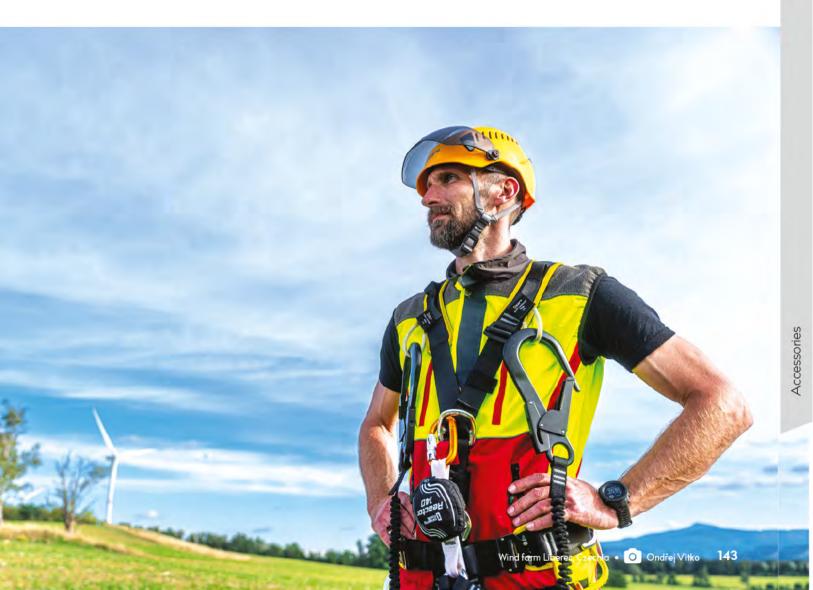

C0058RR00

C0053RW

FIRST AID BAG - LARGE



(without the content)

- ideal for all of those who wish to choosetheir own content
- bright colour increases the visibility in a bad weather or inside the backpack
- big attachment loop
- insert compartments in different sizes
- zipped big mesh pocket
- inside buckle with the emergency whistle
- high-durable material for the use in demanding conditions.

Dimension: 22 x 18 x 5 cm Material: polyamid, polyester Weight: 189 g • 6.7 oz



FIRST AID BAG



(without contents) Compact and light first aid bag for minimalists

- ideal for all of those who wish to choose their own contents.
- all-round zip fastener with reflective component guarantees a good overview and easy access.
- two attachment loops;
- insert compartment in different sizes; zipped mesh pocket
- velcro attachment loop on the harness or a hip strap of backpack
- easily removable from the harness by one hand
- emergency whistle included

Dimension: 13 x 10 x 5 cm Material: polyamid, polyester Weight: 61g • 2.14 oz



ACCESSORIES

W8000BX00

RESCUE POLE



Retractable Pole for attaching an anchor remotely

- Remote rescues
- Pole has a 2.5 m reach
- Slim fit shoulder bag with an additional pocket for heads storage
- Available with four different heads for connectors

Weight: 390 g + 13.8 oz Length Extended: 250 cm Length Retracted: 71 cm Diameter: 2.8 cm Material: fibre glass, brass bush, PVC rubber, stainless steel heads attachment

Head for connectors:

W0024XX01 – for BORA/HECTOR W0024XX02 – for BIG CONNECTOR W0024XX03 – for GIGA CONNECTOR W0024XX04 - for SMALL CONNECTOR

Heads and connectors are not included.



TREEMOUSE



Arboristic throwing bag for tree climbing

- situable for installation of the anchor point in a treetop using cambium saver (JINGLE)
- used for dropping small branches down from the tree top
- situable for installation of the working rope to the places with comlicated access

Material: high endurance synthetic fabric PES steel welded ring of 3 cm in diameter polyamid webbing Colour: yellow, blue/yellow, blue

TREEMOUSE 300

300 g/yellow/code: W9500Y300

TREEMOUSE 350 350 g/blue/yellow/code: W9500Y350

TREEMOUSE 400 400 g/blue/code: W9500Y400



W9500Y

C0012YB

C0013YB

FALCONER FULL



Lightweight gloves featuring great grip, dexterity and ability.

- durable double layer of artificial and split cow grade A leather on the palm
- additional reinforcement of the high-wear area between forefinger and thumb,
- breathable abrasion resistant nylon on the back
- neoprene cuff with a reinforced attachment hole

Size: 8, 9, 10, 11 EN 420

FALCONER TACTICAL

Lightweight gloves with uncovered tops of thumb, forefinger and middle finger making manipulation of metalwork simpler.

- durable double layer of artificial and split cow grade A leather on the palm
- additional reinforcement of the high-wear area between forefinger and thumb
- breathable abrasion resistant nylon on the back
- neoprene cuff with a reinforced attachment hole.

Size: 8, 9, 10, 11 EN 420

FALCONER 3/4





Lightweight gloves with removed tops of fingers making manipulation of metalwork simpler.

- durable double layer of artificial and split cow grade A leather on the palm
- additional reinforcement of the high-wear area between thumb and index finger
- breathable abrasion resistant nylon on the back
- neoprene cuff with a reinforced attachment hole
- two special pull-off half-loops on top of middle and ring fingers to secure an easy put off.

Size: 8, 9, 10, 11 EN 420

GRIPPY

C0006BH



Made out of quality leather. Reinforced palm area. Closed fingers. Abbrasion resistant. Gloves are easy to put on thanks to special pull-on loop.

Kevlar thread • Size: 8, 9, 10, 11 EN 388, EN 420

GRIPPY 3/4





Made out of quality leather. Reinforced palm area and lower part of finger area. Exposed fingertips allow you to keep your sense of touch and manipulate your gear. Gloves are easy to put on thanks to a special pull-on loop.

Kevlar thread • Size: 8, 9, 10, 11 EN 388, EN 420



A0031BS

WORK KNIFE



Pocket knife with first class stainless steel blade.

- blade length 80 mm
- one hand operation and safety lock of opened knife
- stainless steel flexible clip for belt fixation, hole for the accessory cord fixation

Material: blade and clip – stainless steel, plastic handle Weight: 83 g • 2.9 oz

RESCUE KNIFE



Special rescue knife with first class stainless steel ejection blade.

- blade length 80 mm and safety lock of opened knife
- special shape of the blade with the hook at the end for cutting of ropes or webbing
- other features: glass cutter, hammer for glass window breaking, opener of electrical cases – wrench
- stainless steel flexible clip for belt fixation

Material: Blade and clip – stainless steel, plastic handle Weight: 196 g • 6.9 oz

CULTER



Reliable knife for daily work or emergency situations including belt cutter and window breaker.

- half-serrated 80 mm blade made of 420B stainless steel
- handle made of stainless steel and red G10 fiber
- one hand opening and closing, safety lock
- G10 line of fiber materials is not electrica-
- Ily conductive

 G10 fiber exhibits superior mechanical and dimensional stability and doesn't shrink, it can also resist high temperature (up to 180 °C)

Color: red Weight: 208g • 7.34 oz Material: stainless steel, G10 material

A0030Y

A0050HH00

W9803BY

OVERALL



Working overall combining durability, working comfort and maximum freedom of the movement. Specially intended for work at height, easy and quick to take off even without taking the shoes off.

- 21 % polyester, 70 % cotton 250 g/m2, 9 % Cordura 500D
- bright colors and reflective strips increase the worker's visibility
- high durability even when it's washed at high temperatures (90° C)
- full-length overall with two zippers to guarantee high comfort, practicality and a high speed when putting-on
- adjustable waist for optimum working comfort
- elastic fabric in the armpits and crotch
- two large breast pockets
- on the left sleeve pocket with compartments for mobile phone, pens, small items

- on the left leg extremely large pocket for plans, gloves, etc.
- on the right leg pocket for rescue knife supplemented by two rings of rubber for protection against falling
- on the back zipper pocket for small items
- all pockets marked with bright color for greater comfort
- pants, collar and sleeves ending with adjustable Velcro against heat loss, the penetration of dirt, snow, etc.
- pants tested in the fields of work at height, rescue, arboriculture
- made in the Czech republic

Size: S, M, L, XL • EN ISO 13688



overall			
size	chest C [cm/in]	height D [cm/ft]	lenght E[cm/in]
S	90/35	172/5.6	102/40
м	94/37	175/5.7	105/41
L	100/39	180/5.9	110/43
XL	106/42	185/6	115/45

note: length after sewing (is added due to shrinkage), shrinkage after washing according to the processing instruction sheet is about 4% of the length

WORKING PANTS



Lightweight and highly flexible pants specially intended for work at heights.

- perfect combination of durability, working
- comfort and maximum freedom of the movement
- contrast colours and reflective strips increase the worker's visibility
- material ELASTAN guarantees a very high comfort during movement
- jeans low cut for comfortable fit
- higher back for comfortable fit with a working harness
- zippered pockets to secure any items needed in the pocket
- large zippered pocket for mobile phone or small tools, including a loop to secure tools against the fall
- in the side seam pockets for a knife, pencil, screw driver and other small tools
- on the back part deep pocket for any items
- loops for 50 mm wide belt
- large two loops for braces

- front part reinforced with CORDURA
- pants ending with adjustable velcro against heat loss, the penetration of dirt, snow, etc.
- pants tested in the fields of work at height, rescue, arboriculture
- bottoms of the pants are equipped with the mettalic hooks.

Color: black + yellow and reflexive strips Size: S, M, L, XL

Material: 98% cotton/2% elastan (250 g/ m²)

+ Cordura 500D EN ISO 13688

	2	5	C	
B	9,1	1	4	
P	A.R	N		

W9801BY

working po	ints	
size	waist A [cm/in]	lenght B [cm/in]
S	78-82/30-32	105/41
м	82-86/32-34	110/43
L	88-94/35-37	113/44
XL	96-104/38-41	115/45

note: length after sewing (is added due to shrinkage), shrinkage after washing according to the processing instruction sheet is about 4% of the length



C1034SS0

APOLLO PANTS



APOLLO SHORTS

Men's technical pants for movement in the vertical world and for daily wear to work or school.

- the ergonomic REGULAR FIT cut with shaping at the knees and the inset gusset at the crotch guarantee maximum freedom of movement
- made of a blend of high quality cotton and spandex that guarantees breathability, durability and flexibility
- fastening of the pants with a high-quality YKK metal zipper and a metal button with the Singing Rock logo
- the possibility to tighten the width of the legs with an elastic band hidden inside the legs
- elastic band in the side seam for attaching a brush for cleaning the holds
- 2 front and 2 back comfort pockets
- the pants are finished with an enzymatic wash that makes them soft to the touch, shrunken and maximally comfortable

Size: S-XXL Material: 96% cotton, 4% spandex Colour: anthracite Weight: 430 g • 15.2 oz

C1035SS0



Men's technical shorts for movement in the vertical world and for daily wear to work or school.

- the ergonomic RELAX FIT cut with the inset gusset at the crotch guarantee maximum freedom of movement
- made of a blend of high quality cotton and spandex that guarantees breathability, durability and flexibility
- fastening of the shorts with a high-quality YKK metal zipper and a metal button with the Singing Rock logo
- elastic band in the side seam for attaching a brush for cleaning the holds

- 2 front and 2 back comfort pockets
- the shorts are finished with an enzymatic wash that makes them soft to the touch, shrunken and maximally comfortable

Síze: S–XXL Material: 96% cotton, 4% spandex Colour: anthracite Weight: 275 g • 10 oz

PANTS / SHORTS	Code	Style	Size	Color	Material	Weight gloz	Waist width on / In	Hip width on / In	Thigh width on:/lu	Knee width cm / In	Step length cm / ln	Total length from waist an / in	Width of leg edge cm / in	
	C1034SS02		s			420 14.82	86 33,9	101 39,8	50 19,7	45 17,7	82 32,3	105 41,3	37 14,6	
	C1034S503		м				430 15.17	88 34,7	104 40,9	55 21,7	47 18,5	82 32,3	106 41,7	38/15
APOLLO	C1034SS04	men's	L.	antracit	96 % cotton, 4 % spandex	440 15.52	89 35	107 42,1	58 22,8	47/18,5	82 32,3	106 41,7	39 15,4	
	C1034SS05		XL			455 16.05	95 37,4	112 44,1	60 23,6	47/18,5	82 32,3	107/24,1	40 15,8	
	C1034SS06		XXL			475 16.76	102 40,2	117 46,1	60 23,6	50/19,7	82 32,3	108/42,5	40 15,8	
	C1035SS02		S	1		265 9.35	85 33,5	101 39,8	59 23,2	1000	27 10,6	52 20,5	51 20,1	
	C1035SS03		M			275 9.70	89 35	101 39,8	62 24,4	1	27/10,6	53 20,9	51 20,1	
APOLLO	C10355S04	men s	L	antracit		96 % cotton, 4 % spandex	285 10.05	92 36,2	104 40,9	63 24,8		27/10,6	53 20,9	51 20,1
	C1035SS05		XL		and second	300/10.58	98 38,6	107 42,1	63 24,8		27/10,6	53 20,9	52 20,5	
	C1035SS06		XXL			320/11.29	100 39,4	112 44,1	65 25,6		27/10,6	53 20,9	52/20,5	





1

T-SHIRT ROCKET

0

men – C1028VX women – C1029VX

Comfortable t-shirt made of top quality cotton with elastan, ensures the freedom of movement when climbing or wearing it everyday.

- tag less label
- relaxed fit
- made in the Czech Republic

Color: purple Size: XS, S, M, L, XL 96% cotton, 4% elastan 70 g/m²

T-SHIRTS BLUE MOUNTAIN

men – C1032MM women – C1033MM

Comfortable t-shirt designed by climbers for climbers. Made of top quality cotton with elastan, keeps you moving freely at the crag or at the mountains.

- tag less label
- relaxed regular fit
- classic round collar
- made in the Czech Republic

Color: blue Size: XS, S, M, L, XL Material: 96 % cotton, 4% elastan Weight: 170 g/m²

W9802BY

Pique style of polo t-shirt that is sure to look great with any outfit.

The polo features a regular short sleeves and collar with a three button placket for a comfortable fit. The top is finished with split sides and an embroidered Singing Rock logo for an instantly recognisable branded look.

- polo shirt with short sleeves
- regular collar
- Singing Rock branding
- machine washable

Style: UNIsex Size: S, M, L, XL Material: 100 % pique cotton

POLO T-SHIRT





ROCKLIFE T-SHIRT LONG SLEEVE



C1036VX - man C1037AX - woman

Comfortable long-sleeved T-shirt for your climbing activities or everyday wear in a COMFORT FIT cut in a very pleasant meliert material.

- minimalist print and woven label on the sleeve
- women's model with a deeper V-neck
- printed size label
- made in the Czech Republic

Size: S – XL (men's), XS-XL (women's) Material: 40 % cotton, 50 % polyester, 10 % elastan Color: burgundy red (men's), blue (women's)

T-SHIRT COOL



W9806BX

Men's functional T-shirt made of cool material for working at heights or sports activities even on the hottest summer days.

- NILIT® Breeze® ensures a cool feeling when worn, special nylon fibres ventilate perfectly and maintain an optimal temperature
- flat seams and compression fit guarantee comfort even under the most strenuous physical work
- CoolMax fresh FX prevents overheating thanks to the active thermoregulation of the material
- T-shirt has antimicrobial protection with silver ions to slow down the decomposition of bacteria during physical activities
- made in the Czech Republic

Size: S - XXL

Material: 100 % nylon (front NILIT ® Breeze®, back CoolMax fresh FX) Color: black

W9805BX

T-SHIRT ACTIVE LONG SLEEVE



Comfortable functional long-sleeved T-shirt for cooler days when working at heights or sporting activities.

- specially developed quick-drying material and cut ensure thermal comfort during physical activities
- extended compression fit, prevents pilling during work or sports
- hybrid cut fits both men and women
- side panels ensure body temperature regulation during exercise
- flat seams guarantee wearing comfort
- T-shirt has antimicrobial protection with silver ions to slow down the decomposition of bacteria during physical activities
- made in the Czech Republic

Size: S - XXL

Material: 92% PAD supplex, 8% lycra (front and back), 92% PES, 2% PAD, 6% lycra (side panels) Style: UNIsex Color: black

C1018BY

Warm, cozy and comfortable hoody with a kangaroo pocket and a big hood.

Style: UNIsex Size: XS, S, M, L, XL Material: 90% cotton, 10% soft polyester Color: black and yellow

HOODY





C1019BY - man

C1020BY - woman

HOODY FULL ZIP



Warm, cozy and comfortable hoody with two pockets, hood and full zipper

 longer sleeves and special cut for climbers gurantee maximal comfort when climbing or working at height

Style: Men, Women

Size: S, M, L, XL, XXL (XXL- man only) Material: 90 % cotton, 10 % soft polyester Color: black and yellow

T-SHIRT MONKEY

C1030Y



made from top quality cotton for your youngest climbing stars.

- Tagless size lable
- Relaxed fit
- made in the Czech Republic

Color: yellow Size: 116, 122, 128 Material: 100 % cotton, (170 g/m²)



C1031M

KIDS HOODY

fits both boys and girlswith a kangaroo pocket and a big hood

Color: blue Size: 116, 122, 128 Material: 90 % cotton, 10 % polyester (300 g/m²)

Warm, cozy and comfortable hoody for the youngest climbers.

C1038B

T – SHIRT BACKBONE JUNIOR

HOODY JUNIOR

Description of the second seco

Comfortable t-shirt for everyday wear, school, sports and other activities. It combines comfort, quality and SINGING ROCK style.

- relaxed fit for boys and girls
- t-shirt features the SINGING ROCK logo on the front and back
- proudly made in Czechia guaranteeing high quality manufacturing and materials with a grammage of 170 g/m²

Color: black Size: 140, 146, 152 Material: 100 % cotton

C1039B



Made from cosy material to keep teenagers warm and comfortable. With Singing Rock logo and distinctive arrow on the front.

- large hood protects the head from cold and wind while providing comfort and a cozy feeling
- features a handy kangaroo pocket on the belly, perfect for warming your hands
- Singing Rock logo on the back of the hoodie and a smaller logo on the sleeve
- large Singing Rock arrow on the chest

Color: black (hood yellow inside) Size: 140, 146, 152 (unisex) Material: 90 % cotton, 10 % soft polyester

T- SHIRTS	Code	Style	Size	Color	Material	Book length on / In	Front length on / in	Chest width om / In	Waist width an / in	Bottom width cm / in	Leeve drcumference on / la	Sleeve length cm / In	Neck width on / in
			XS			65 25,6	65 25,6	93 36,6	90 35,4	88 34,7	27 10,6	34 13,4	22 8,7
6	C1032MM02		S			65 25,6	65 25,6	98 38,6	96 37,8	96 37,8	29/11,4	34 13,4	24 9,5
BLUE	C1032MM03		м	1	96 % cotton,	68 26,8	67 26,4	104 40,9	102 40,2	102 40,2	32 12,6	37 14,6	24 9,5
MOUNTAIN	C1032MM04	men's	L	blue	4 % elastan (170 g/m²)	71 28	70 27,6	110/43,3	107 42,1	107 42,1	32 12,6	37 14,6	25 9,8
-	С1032ММ05		XL			72 28,4	71 28	116 45,7	112 44,1	112 44,1	35 13,8	38 15	25 9,8
1			XS			58 22,8	58 22,8	73 28,7	67 26,4	80 31,5	29 11,4	18(7,1	22 8,7
6	C1033MM02		S			59 23,2	59 23,2	77 30,3	69 27,2	87 34,3	30 11,8	20/7,9	24 9,5
BLUE	C1033MM03	women's	м	blue	96 % cotton, 4 % elastan	61 24	61/24	83 32,7	77 30,3	92 36,2	30 11,8	20 7,9	26 10,2
MOUNTAIN	С1033ММ04		1		(170 g/m²)	62 24,4	62 24,4	92 36,2	84 33,1	101 39,8	32 12,6	23 9,1	26 10,2
	C1033MM05		XL			64 25,2	64 25,2	96 37,8	88 34,7	106(4),7	33 13	24 9,5	28(11
	C1028VX02		XS			66 26	66 26	93 36,6	89 35	89 35	35 13,8	28jn	22 8,7
5 of	C1028VX03		S		96 % cotton,	66 26	66 26	95 37,4	93 36,6	93 36,6	35 13,8	28 11	24 9,5
ROCKET	C1028VX04	menís	м	porple	4 % elastan (170 g/m²)	68 26,8	68 26,8	103 40,6	100 39,4	100 39,4	35 13,8	31/12,2	24 9,5
	C1028VX05		L		(no gymy	70 27,6	70 27,6	108 42,5	105 41,3	106 41,7	35 13,8	32 12,6	26/10,2
			XL			74 29,1	74 29,1	113 44,5	110 43,3	110 43,3	37 14,6	34/13,4	26/10,2
	C1029VX02	1	XS			60 23,6	60 23,6	74 29,1	69 27,2	82 32,3	29 11,4	18 7,1	22 8,7
	C1029VX03		S		0/9/	60 23,6	60 23,6	78 30,7	73 28,7	88 34,7	30 11,8	19 7,5	26 10,2
ROCKET	C1029VX04	women's	м	purple	96 % cotton, 4 % elastan	62 24,4	62 24,4	85 33,5	77 30,3	93 36,6	30 11,8	19 7,5	26 10,2
	C1029VX05		L		(170 g/m²)	64 25,2	64 25,2	90 35,4	82 32,3	100 39,4	32 12,6	21 8,3	28/11
		1	XL			68 26,8	68 26,8	94 37	85 33,5	105 41,3	32 12,6	24/9,5	28 11
	C10138B01		XS			67 26,4	66 26	89 35	91 35,8	94 37	30/11,8	30/11,8	23 9,1
nesk'	C1013BB02		S	1		69 27,2	68 26,8	100 39,4	101 39,8	103 40,6	32 12,6	35 13,8	25 9,8
BACKBONE	C1013BB03	men's	м	black	100 % cotton	71 28	70 27,6	107 42,1	107 42,1	110 43,3	34 13,4	35 13,8	25 9,8
	C1013BB04		ï			72 28,4	71 28	115 45,3	115/45,3	120/47,2	38 15	38(15	26/10,2
-	C1013BB05	1	XL			75 29,5	74 29,1	125 49,2	125 49,2	128/50,4	39 15,4	38(15	26/10,2
	C1014BB01		XS		1	60 23,6	60 23,6	73 28,7	69 27,2	83 32,7	28 11	23 9,1	24 9,5
C. DEEX	C1014BB02		S	black	100 % cotton	62 24,4	62 24,4	77 30,3	75 29,5	90 35,4	30/11,8	23 9,1	26/10,2
BACKBONE	C1014BB03	women's	м			65 25,6	64 25,2	86 33,9	80 31,5	95 37,4	32 12,6	25/9,8	26/10,2
	C1014BB04		L			69 27,2	68 26,8	90 35,4	86 33,9	100 39,4	32 12,6	25 9,8	28/11
-	C1014BB05		XL			69 27,2	68 26,8	96 37,8	91 35,8	105 .41,3	33 13	27/10,6	29 11,4
Пазак	C1038B140		140			50/19.7	50 19.7	74 29.1	74(29.1	76 29.9	30)11.8	21 8.3	20[7.9
BACKBONE	C1038B146	children's	146	black	100 % cotton	51 20.1	52 20.5	77 30.3	77 30.3	79 31.1	32/12.6	23 9.1	20)7.9
	C1038B152		152			55 21.7	56 22	78 30.7	80 31.5	82 32.3	32 12.6	23 9.1	22 8.7
-							45011.7	Joint .	(2)2 ***	(0)0+7	2105	144.5	
MONKEY	C1030Y116	Sec. 19	116		100 % cotton,	44[17.3	43 16.9	60 23.6	62 24.4	63 24.8	24 9.5	16 6.3	18/7.1
MONKEY	C1030Y122 C1030Y128	children´s	122	yellow	(170 g/m²)	46 18.1 52 20.5	45 17.7	64 25.2 68 26.8	65 25.6 67 26.4	66 26 71 28	24 9.5 26 10.2	18 7.1 20 7.9	18(7.) 20(7.9
	W9802BY02	-	s			72/28,4	71/28	100 39,4	97 38,2	99/39	31/12,2	30[1],8	21(8,3
	W9802BY03		м			72 28,4	71128	106 41,7	100 39,4	104 40,9	31/12,2	32/12,6	23 9,1
POLO	W9802BY04	men's	L	black	100 % cotton	74 29,1	73 28,7	114 44,9	108 42,5	114 44,9	33/13	35/13,8	26/10,2
T-SHIRT	W9802BY05		XL	-	in the second	77 30,3	76 29,9	122/48	116 45,7	120 47,2	38/15	37 14,6	26/10,2

singing rock

-	C1036VX02	1.	S			68 26.8	67 26,4	96 37.8	94 37	98 38.6	25 9.8	67 26.4	18 7.1
	C1036VX03	1	м		40% cotton,	69 27.2	69 27.2	102 40.2	96 37.8	102 40.2	25 9.8	68 26.8	18.5 7.3
ROCKLIFE long sleeve	C1036VX04	men s	L	burgun- dy red	50 % PES,	70 27.6	70 27.6	106 41.7	100 39.4	106 41.7	25 9.8	69 27.2	19 7.5
	C1036VX05		XL		10 % elastan	72 28.4	72)28.4	112 44.1	106 41.7	112 44.1	2519.8	70 27.6	19.5 7.7
	C1037AX01		XS		-	61 24	61 24	86 33,9	78 30,7	86 33,9	1917,5	60 23,6	2017,9
	C1037AX02		s	blue	40 % cotton, 50 % PES, 10 % elastan	62 24,4	62 24,4	90 35,4	82 32,3	90 35,4	1917,5	61 24	2017,9
ROCKLIFE long sleeve	C1037AX03	women's	м			63 24,8	63 24,8	94 37	86 33,9	94 37	19 7,5	62 24,4	21 8,3
	C1037AX04		L.			64 25,2	64 25,2	98 38,6	90 35,4	98 38,6	2017,9	63 24,8	21/8,3
	C1037AX05		XL			65 25,6	65 25,6	102 40,2	94 37	102 40,2	2017,9	63 24,8	21 8,3
-	W9805BX02		S		front and	68 26,8	66 26	94 37	74(29,1	86 33,9	1917,5	70 27,6	20/7,9
	W9805BX03	10.2	м]	back: 92 %	69 27,2	69 27,2	100 39,4	82 32,3	93 36,6	20/7,9	71 28	21/8,3
ACTIVE long sleeve	W9805BX04	UNI	- L -	black	PAD supplex, 8 % lycra side	69 27,2	69 27,2	111 43,7	90 35,4	100 39,4	22 8,7	73 28,7	22)8,7
	W9805BX05		XL		panels: 92% PES, 2 % PAD, 6 % lycra	72 28,4	72 28,4	114 44,9	93 36,6	104 40,9	22 8,7	74 29,1	23 9,1
	W9805EX06		XXL	-	o wiyeld	74 29,1	72 28,4	120 47,2	99 39	110 43,3	23 9,1	75 29,5	23 9,1
-	W9806BX02		S			76 29,9	76 29,9	101 39,8	96 37,8	98 38,6	35 13,8	37 14,6	24/9,5
	W9806BX03		м		100 % nylon (front NILIT ® Breeze®, back CoolMax	78 30,7	78 30,7	106 41,7	101 39,8	103 40,6	36 14,2	38[15	24/9,5
COOL	W9806BX04	men's	L	black		80 31,5	80 31,5	111 43,7	106 41,7	108 42,5	37 14,6	39/15,4	26/10,2
	W9806BX05		XL		fresh FX)	83 32,7	83 32,7	116 45,7	110/43,3	113 44,5	38 15	40/15,8	26/10,2
()	W9806BX06		XXL			86 33,9	86 33,9	121 47,6	115 45,3	118 46,5	39 15,4	41[16,1	26 10,2
HOODIES		i	1		Sec. 1	Bock length	Front length	Chest width	Wolst width	Botteen width	Leeve circumference	Sleeve length	Neck widt
HOODIES	Cl018BY01	Style	Size	Color	Moterial	on / in 67 26,4	65 25,6	em / in 92 36,2	on / In 92 36,2	on / In 88 34,7	an / in 17 6.69	cm / in 68 26,8	om / in 28/11
-	C1018BY02	1.0	S	S M L XL		67 26,4	65 25,6	98 38,6	94 37	91 35,8	18/7,1	71/28	28/11
HOODY	C1018BY03	UNI				69 27,2	68/26,8	105/41,3	100 39,4	96 37,8	2017,9	75 29,5	30 11,8
	C1018BY04	44.0			10 % PES	72 28,4	70 27,6	110 43,3	107/42,1	100 39,4	2017.9	78 30,7	30/11,8
	C1018BY05		XL			72 28,4	73 28,7	118/46,5	114 44,9	108/42,5	2017,9	82 32,3	30/11,8
The second	C1019BY02		S	s		66 26	65 25,6	109 42,9	100 39,4	87 343	18/7,1	73 28,7	30/11,8
	C1019BY03	1	м			70 27,6	69 27,2	117 46,1	107 42,1	95 37,4	18[7,1	76 29,9	30/11,8
HOODY	C1019BY04	men s	L	black/	90 % cotton,	72 28,4	70 27,6	122 48	114 44,9	100 39,4	18 [7,1	78 30,7	30/11,8
FOLLZIP	C1019BY05		XL	yellow	10% PES	76129,9	75 29,5	130/51,2	120/47,2	105 41,3	2017.9	80 31,5	30/11,8
	C1019BY06		XXL	1		79 31,1	77 30,3	135 53,2	125 49,2	115 45,3	2017,9	82 32,3	30/11,8
-	C1020BY02	1	S	1		66 26	66 26	98 38,6	83 32,7	86 33,9	18/7,1	74 29,1	24 9,5
	C1020BY03	1	M	1		68 26,8	68 26,8	107 42,1	90 35,4	92 36,2	18/7,1	76 29,9	24 9,5
HOODY	C1020BY04	women's	L	black/	90 % cotton,	70 27,6	70 27,6	114 44,9	95 37,4	100/39,4	20 7,9	80 31,5	24 9,5
	1. Contraction of the	1	XL	yellow	10% PES	72 28,4	72 28,4	120 47,2	105 41,3	108 42,5	22 8,7	84 33,1	24 9,5
	C1020BY05				i		1.1.1.1.1.1						
			-			prime a		0010-00	0010-0				
	C1039B140		140	black/	90 % cottop	51)20.1	50 19.7	92 36.2	88 34.7	84 33.1	24 9.5	55 21.7	24 9.5
ноору	C1039B140 C1039B146	children's	146	black/ yellow	90 % catton, 10 % PES	53 20.9	51 20.1	95 37.4	93 36.6	88 34.7	26/10.2	57 22.4	24 9.5
ноору	C1039B140	children's						-				-	
	C1039B140 C1039B146	children's	146		10 % PES	53 20.9	51 20.1	95 37.4	93 36.6	88 34.7	26/10.2	57 22.4	24 9.5
ноору	C1039B140 C1039B146 C1039B152	children's children's	146 152			53 20.9 55 21.7	51 20.1 54 21,3	95 37.4 98 38.6	93 36.6 96 37.8	88 34.7 90 35.4	26 10.2 26 10.2	57 22.4 59 23.2	24 9.5 26 10.2

SNAPBACK HAT

C0074BY00



BEANIE



BEANIE LOGOS – C0054BX BEANIE BLACK ARROW – C0055BX

- made from microfibre polyester fabric that keeps Its shape well, as well as being breathable, warm, soft and lightweight
- keep your had warm and dry during vertical activities
- fits very well under the helmet
- suitable also for running, skiing, biking and other outdoor activities

Size: S-M, L-XL Material: 100 % Polyester

BEANIE PRO



BEANIE POLAR

Protective beanie for cold and windy conditions.

- upper part made of breathable, warm, soft and lightweight micro fiber polyester fabric
- lower section is made of windproof micro fleece fabric to protect against wind in cold environments
- fits very well under a helmet
- lateral perforations in ear areas ensure hearing during work or other activity
- machine washable up to 30° C, not suitable for tumble dry
- available in two sizes

Weight: 21 g • 0.74 oz Size: S-M (49-53 cm • 19-21 in), L-XL (54-58 cm • 21-23 in) Material: 100 % Polyester

C0090BB00

C0087SB



Warm Polartec® Power Stretch® beanie for sport and work activities.

- made of very warm stretch functional material that can wick away sweat and is more resistant to wind and abrasion compared to conventional materials
- fits well under the helmet for all vertical activities
- flat seams do not disturb when wearing the helmet
- suitable also for other outdoor activities skiing, snowboarding, running, etc.
- machine washable up to 30 °C, not suitable for tumble dry
- available in one size, fits men & women

Size: UNI Material: 100 % PES

C0088SB

BALACLAVA PRO



Balaclava for the ultimate protection of the head, face and neck at cold and extreme conditions.

- provides great comfort due to stretchy, breathable fabric protecting your face while wicking moisture away
- designed for wearing under a helmet during all vertical activities
- you can wear it as a balaclava, half ski mask or neck gaiter. Just don't wear it in an airport or bank!
- suitable also for skiing, snowboarding, mountainbiking
- machine washable up to 30 °C
- fits men & women, available in two sizes

Size: S–M (52–55 cm), L–XL (56–59 cm) Material: 52% polyamide, 42% polypropylene, 6% elastan

C0069

A Wool/acrylic mix of beanies, featuring a double layered headband and embroidered design.

- · fits well under the helmet
- fleece double layered headband for colder conditions

Size: UNI Material: wool, acrylic

BEANIE HAT



BLACK ARROW – C0079BX00 LOGOS – C0080BX00


SCARF

BLUEDING

Multifunctional scarf 8 in 1 with a wide variety of uses for your protection against wind and cold.

- can be used as a balaclava, cap, masc, scarf, beanie, shawl, ear warmer, etc.
- made from elastic high-tech 100% polyester microfibre fabric that keeps its shape well, as well as being breathable, warm, soft, lightweight, of a very high quality and antibacterial.
- machine washable at 30 °C, cannot be tumble dried, air dry very quickly

Size: UNI (approx. 25 cm wide x 46 cm long) Weight: 35 g • 1.24 oz

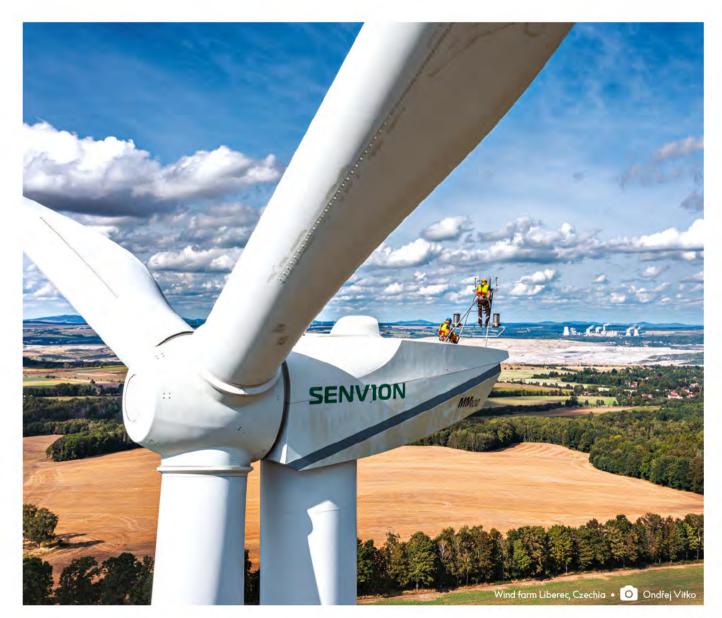



0.51 - P0010X050 0.31 - P0010X030

PITCHER



BEER MAT



Wooden beer mats under your favorite glass of beer or cup of tea and coffee.

- perfect way to protect the surface of your table from the wet beer mugs or coffee cups
- made of very durable, high quality birch plywood coated with transparent varnish

Classical beer pitcher 0.51 or 0.31 for all who likes climbing and all activities on our vertical playground.

SQUARE - P0047XX01 CIRCULAR - P0047XX02

Weight: 50 g • 1.76 oz Material: plywood Thickness: 8 mm Dimensions: 9 x 9 cm • 3.5 x 3.5 in, Ø 10,5 cm • 4.1 in

WHOLE BEAN COFFEE CAN



Whole bean coffee for outdoor enthusiasts and coffee lovers. Enjoy the coffee time before/after your climbing or working day.

- whole bean coffee in a practical can, thanks to which the coffee retains its freshness and aroma
- for finest taste, always use clean, filtered water

Weight: 150 g • 5.3 oz Coffee: 100 % Arabica

P0038W150

P0048X400

TRAVEL MUG



Travel Mug for your favourite coffee, tea or cold drink when you are travelling, camping or working in the office.

- keeps your drink hot or cold exactly as you need it
- BPA free no-spill top features a handy hinged lid to securely close when it's not in use
- made from durable, high-grade stainless steel that preserves the flavour and freshness of your drink
- double vacuum-insulated wall keeps the drink hot / cold for long hours, making it ideal for travel by car or other means of transport
- exterior is made from a bamboo composite material which protect your hands from the heat
- non-slip bottom, suitable for all common drink holders in the cars

Weight: 170g • 6 oz • Volume: 400 ml • 14 fl. oz Height: 17 cm • 6.7 in Material: stainless steel, bamboo, BPA free plastic

GROUND COFFEE OUTDOOR

P0038GB10



Coffee for outdoor enthusiasts and coffee lovers. Enjoy the coffee time before/after your climbing or working day.

- each bag includes tear open inner pack which can be placed on any cup
- for finest taste, always use clean, filtered water, pour 180-200 ml, leave for 5 minutes and enjoy your coffee
- bags contain A1 and Brazil ground coffee
- A1 (80% Arabica / 20% Robusta) with strong, full, medium bitter taste with a pleasant aftertaste, suitable for milk treatments
- 100% Arabica Brazil Pergamino Sul de Minas has very well balanced delicate sweet taste with a slight acidity and a hint of chocolate and almonds
- packet includes 5 bags of Al coffee blend and 5 bags of 100% Arabica Brazil (marked with a stamp on the bag)

Weight: 10 g • 0.35 oz (bag) Coffee: A1 (80% Arabica / 20% Robusta), Brazil (100% Arabica)



BELT

C9091XX



for trousers with Rock&Lock smart buckle Do not use for climbing or work at heights!

Size: M/L, XL Width: 20 mm

SPEED BELT





Belt for trousers with Speed buckle for fast releasing. Width: 44 mm Size: M/L, XL Color: mixed colors Do not use for climbing or work at height! Color: black, khaki, various colors

KEY HOLDER





You will never lose your keys if you use Singing Rock key holders.

USB FLASH DRIVE

P0019XX00



Wooden flash drive to transport and store your personal files.

 small ring to connect it to your key holder or accessory cord.

Capacity: 8 GB Material: Eco Friendly wood





WRISTBAND

P0024XX00



100% latex-free silicone wristband with debossed Singing Rock. Made from premium high quality rubber.

TEXTILE BADGE

10x4 cm - P0031XX01 15x6 cm - P0031XX02



Singing Rock textile embroidered badge to be stitched to your clothing, backpack or bag. Size: 10 x 4 cm, 15 x 6 cm

PAPER BAG

P0033XX00 small - P0033XX02

P0054XX00



Eco-friendly paper bag rounded paper handle supports a respectful approach to the environment. Dimensions: 35x44x18 cm24x33x12 cm

BANNER BAG



There are many ways to save the environment. Like not leaving leftovers and not throwing away old stuff. That's the spirit behind this upcycle bag. It's made from old Singing Rock banners and has handles made from leftover ropes. When you get one, you give things that someone else would throw away a second life.

- bag made from old trade fair banners
- each piece is an original
- handles made from leftover ropes can be adjusted with any knot, factory made approx. 65 cm long
- hand wash the bag, rarely in the washing machine on gentle/sport programme (30 - 40°C), do not use fabric softener or dryer, the bag may not get a third chance
- made in the Czech Republic

Colour: various Weight: 300 g Material: used advertising banners, leftover ropes Dimensions: 38 x 43 x 10 cm

Volume: approx. 16 l

NOTEPAD A5

Notebook Notebook

Manage your important tasks or jot down your to-do list with our Singing Rock notepads.

CONDOM



Safety first

Your Personal Protective Equipment for your hardware. Size: UNI EN ISO 4074, **C**€ 1023

SINGING ROCK PEN



Ballpoint pen for everyday writing.

P0022XX00

P0030XX00

P0023XX00



BANNERS



Size: P0020BB02 Small: 60 x 60 cm P0020BB03 Medium: 30 x 150 cm P0020BB04 Large: 200 x 100 cm P0020BB05 XLarge: 150 x 150 cm

Size: P0021BB00

Table: 29 x 60 cm P0021BB03

P0021BB04 Large: 80 x 340 cm P0021BB05 XLarge: 85 x 450 cm

Medium: 60 x 260 cm

BEACH FLAG

P0021

P0020



Self standing event flag. Made from elastic PES. Comes with a footstand and carrier bag.

SINGING ROCK STICKERS


P0025XX00

with back and front side adhesive.





P0028WE00

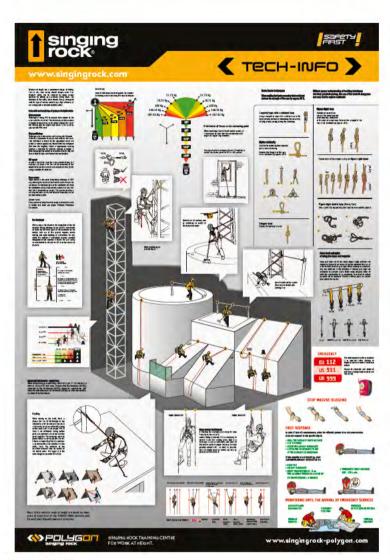

690x990 mm



POSTERS

1





P0027WX00





Image posters with our gear in action.

- 1. Silo
- Helicopter Sweden
 Tree Care
- 5. Tree Care
- 4. Tower Norway
- 5. Chairlift evacuation

Accessories

480x690mm

480x690 mm 480x690 mm

690x480mm

690x480mm





SERVICE & ACTIVITES

POLYGON TRAINING CENTRES SCAFFOLDS AND INDUSTRIAL HALLS FRAMING AND ROOFING FALL ARREST ROPE ACCESS LADDERS TREE CARE ROPE COURSES AND ADVENTURE PARKS WIND TURBINES CABLEWAY EVACUATION MILITARY AND SPECIAL FORCES



POLYGON





Over more than two decades on international markets, SINGING ROCK has become the world's leading manufacturer of Personal Protective Equipment (the "PPE"). In an effort to provide its customers with comprehensive services and solutions in the area of security of workers at height and above depth, SINGING ROCK was the first in the Czech Republic and former eastern Europe to build a completely unique multifunctional training center POLY-GON.

POLYGON facilities create the ideal conditions for providing occupational health and safety (the "OHS") training for work at height and above depth, for testing PPE, for organizing industrial climbing contests and many other events associated with presentation and use of products and techniques related to this area. A number of specific simulations allow visitors to test safely proper techniques of safeguarding when working at height. All this under the direct supervision of experienced trainers while using complete equipment for these activities. With individual approach, high quality equipment and great emphasis on the practical part, our trainings in POLYGON became sought after among individuals and companies not only in the Czech Republic.

SINGING ROCK is certified as IRATA training company.


SINGING ROCK is the first and so far the only company in the Czech Republic to become a member of the globally recognized association IRATA.

IRATA – Industrial Rope Access Trade Association – was founded in the UK in order to ensure a safe working environment for workers at height. In a quarter of century of its existence, IRATA has become a leading expert in the field of security in work at height, and in this field it is the only global association with many member organizations around the world.

Our operated IRATA courses therefore provide, in conjunction with our certificated POLY-GON training centers, a unique opportunity to obtain the best possible qualification for work at height and above depth. After successful completion of the training the participant receives an IRATA certificate, which is valid



around the world and which is required by some foreign entities as the only possible prerequisite to carry out work at height.

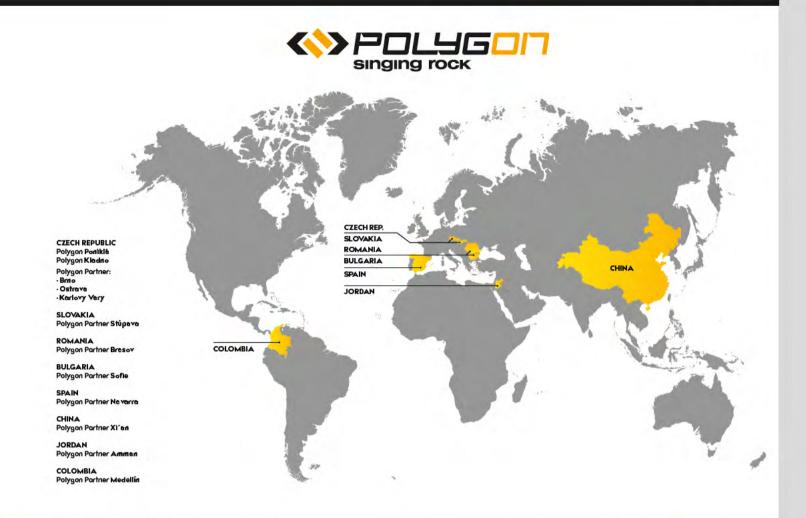



LIST OF SINGING ROCK POLYGON TRAINING CENTERS



POLYGON Poniklá Czech republic

Our first POLYGON is part of the SINGING ROCK headquarter and manufacturing factory in a picturesque valley of the Jizera river. It offers a number of model situations for work at height.

www.polygon-singingrock.com



POLYGON Kladno Czech republic

located in the former premises of Poldi Kladno – Konev. The former manufacturing building offers a real industrial environment to practice work situation when working at heights. www.polygon-singingrock.com



Polygo<mark>n Partner</mark> Brno Czech republic

Located in an industrial area in a former cement plant. Thanks to its height of more than 23m, it gives the opportunity to create a variety of model situations for work at height and rescue training.

www.klajda.cz/skoleni-prace -ve-vyskach-bozp



Polygon Partner Ostrava Czech Republic

Training centre situated in the unique historical industrial site where for more than 150 years thousands of miners used to mine a black coal. www.polygonhlubina.cz



Polygon Partner Karlovy Vary Czech republic

Until recently, the Karlovy Vary region, situated in the west of the Czech Republic, didn't have a proffesional training centre for work at height. It was changed in May 2019. Now, this new POLYGON parter offers high-quality services to all applicants from that part ouf our country.



Polygon Partner Stúpava Slovakia

The Slovak Polygon partner offers a very diverse range of health and safety training for work at heights. Especially for tree climbers, persons professionally qualified to perform periodic inspections for PPE and more.

www.polygony.sk



Polygo<mark>n Partner</mark> Navarra, Spain

Total HSE training centre is equipped with structures that simulate wind turbines, in order to offer true-to-life experiences in their courses. Except basic range of general work at height trainings can also provide GWO and IRATA courses. www.totalhse.com



Polygon Partner Amman, Jordan

Beit Jala Training Center is located in Amman, capital city of Jordan. Except basic range of general work at height trainings can also provide individual trainings in clients location. www.beitjala.com.jo



Polygo<mark>n Partner</mark> Medellín, Columbia

The first POLYGON partner in the American continent provides courses and training, which are specifically regulated for the entire Colombian territory and are part of the mandatory compliance with the Occupational Health and Safety Management System, as well as some at international level. Intervenes in the control and management of hazardous work activities.

www.deporteka.com.co



Polygon Partner Sofia Bulgaria

Training centre situated in Sofia is operated by PROFIXT Ltd, IRATA # 6026/T which has been providing work at heights trainings and IRATA trainings for over 10 years in Bulgaria and has certified more than 400 industrial rope access technicians by the standards of the international system of IRATA. www.profixt.com



Polygon Partner Xi´an China

Training center is located in Xi´an, Shaanxi province capital city with long history. Provide trainings mainly for fire-fighters and rescuers.



Polygon Partner Brasov Romania

This training centre is the first provider of training courses in work-at-height in the southeast of Europe. The centre is evolved through the volume of it's services, the number of technicians and most importantly through it's techniques in providing rope access services. www.e-solo.ro





BASIC SKILLS


Work at height

Workers at height are in permanent danger of falling from a height. That is why their safety should always come first. Worker's safety is achieved by using various methods for setting up a personal fall protection system. The structure of the fall protection system should always correspond with the type of activity considering high efficiency of work along with maximal possible safety.

FALL FACTOR


-

a




Vy=Vx


The impact force (IF) determines the maximum value of force generated during fall arrest of the object by the safety chain. The value of IP has a direct impact on the safety of worker at height. Ideally, we avoid IP if we reduce it to the lowest level possible (max 6kN)

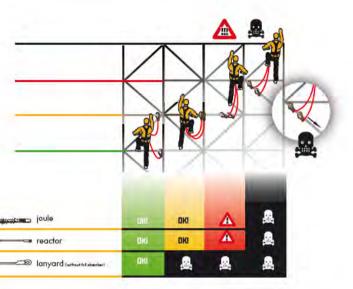

When safeguarding an ascent using a fall arrest type "Y" it is necessary to move at the level FF1 and lower. It means that the connectors (EN362) connected to the fall absorber (EN355) during the ascent do not "fall" below the connection point of the harness (EN361) in which the absorber is connected to the harness.

ANCHORING

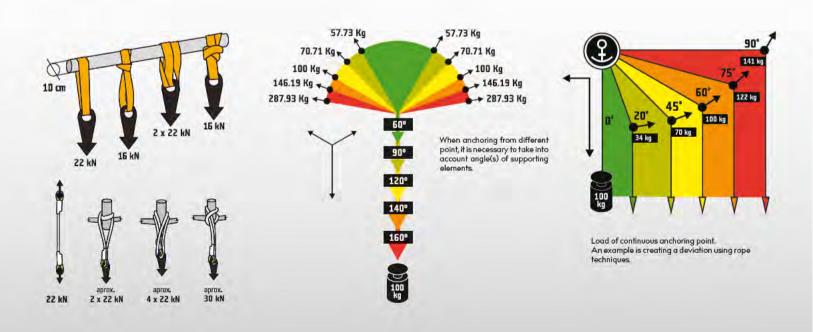

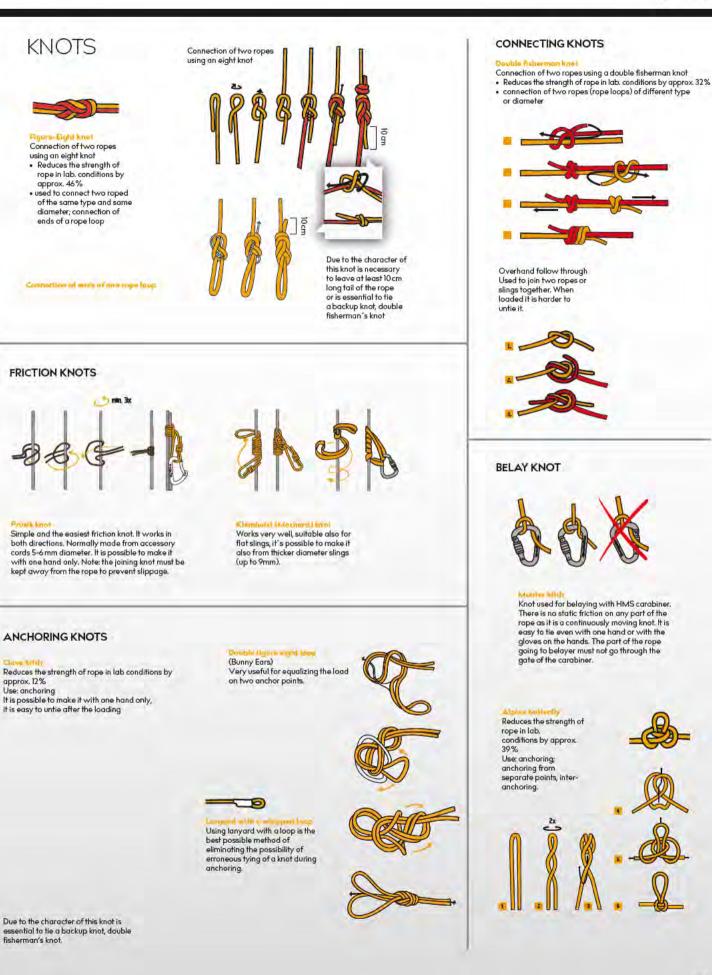


179







SCAFFOLDS AND INDUSTRIAL HALLS

Many people are injured each year when they fall from scaffolds. Scaffolds should be erected by trained and competent people. There are a number of organisations that provide training for the safe use of scaffolds. A scaffold is one way to prevent a fall when working at height. The type of scaffold selected must be suitable for the work and erected and dismantled by people who have been trained and are competent to do so. Those using tower scaffolds should also be trained in the potential dangers and precautions required during use. Tower scaffold provision and use must be properly managed and include rigorous scaffold inspection arrangements.

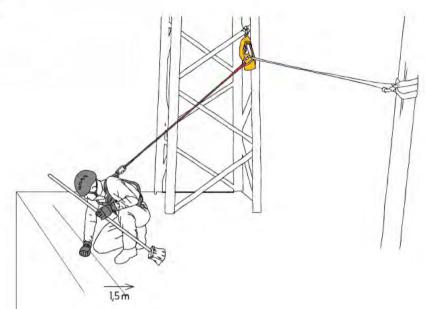

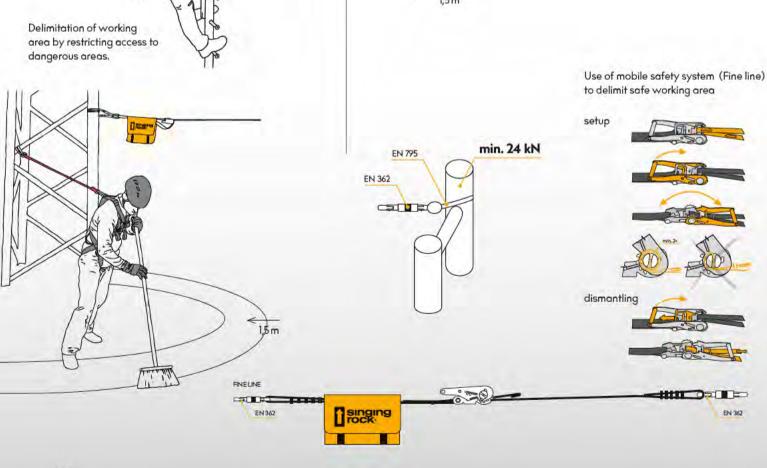

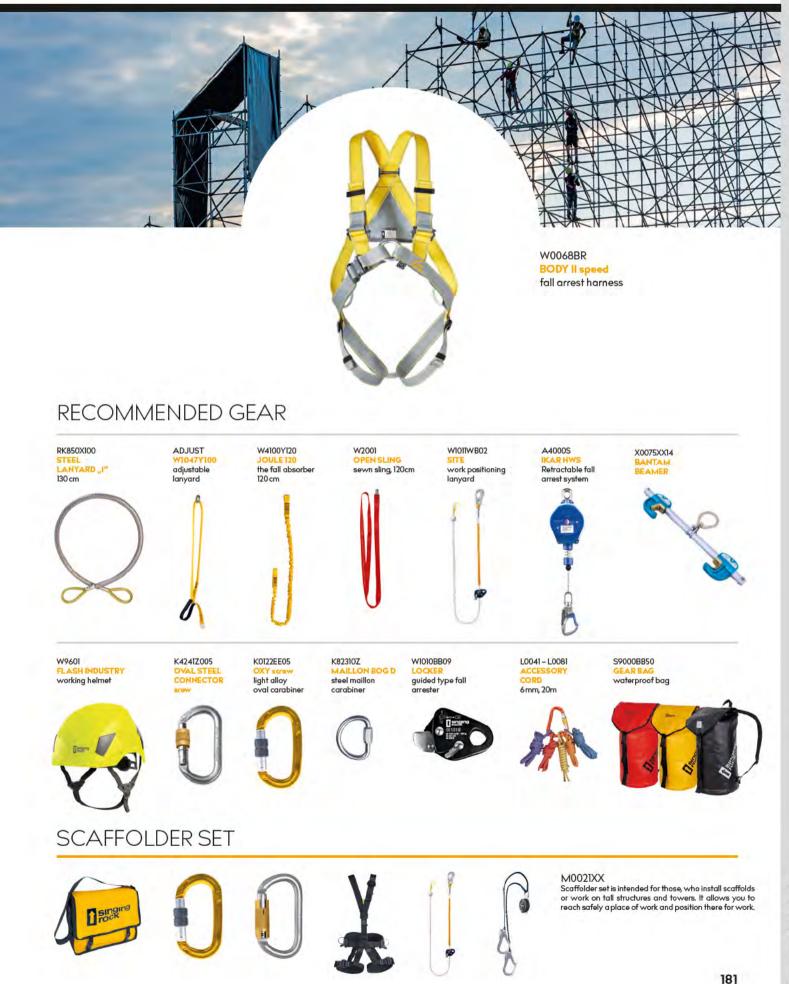





ROOFING

When moving on the roofs, there is always the risk of fall through or slip followed by a fall. To eliminate this risk it is necessary to set up sufficiently strong anchor point and to use proper PPE. If there is no sufficiently strong anchor point, it is necessary to use more anchor points together. The anchorage must be placed above the worker to prevent him/her from a fall. If there is a risk of falling, it is necessary to incorporate a fall absorber into the safety chain. Pay attention to the horizontal distance from the vertical of the anchor point. The bigger it is the more dangerous possible fall will be.

1,5 m Use of mobile safety system (fine line) to delimit safe working area.



RECOMMENDED GEAR



Services & Activities






TOWERS AND RIGGING

- Working on tall structures may involve fall arrest, work positioning, rope access and possibly evacuation.
- If no stable safety system is present and the structure needs to be climbed repeatedly a flexible fall arrest line may be required
- For climbing on the frame construction of metal towers fall absorber may be essential.
- Construction demands a full range of fall protection solutions to meet the needs of a dynamic workplace. That's why workers turn to SINGING ROCK for expertise, superior
- a aynamic workplace. That's why workers turn to Singing ROCK for expertise, superior quality products and continual systems innovation.

Some basic principles of using ropes and lanyards:

Keep your rope out of any sharp edges, rough surfaces and chemicals. Especially on slopes anticipate potential direction of fall and the strain of your rope. When working on constructions, pay attention to the direction of leading your rope and anticipate its possible strain. When using lanyards either to climb the construction or to positioning, take heed to reduce potential fall to minimum! Therefore always place the anchor point above the worker.

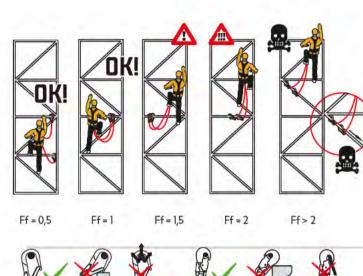

EN 358


EN 36












Fall absorbers:

When using a fall absorber, the elongation of the fall absorber during breaking action shall be considered. As there are different types of fall absorbers on the market, safe use of this product requires careful reading and understanding of instructions for use, where the method of calculation maximal possible elongation of fall absorber is stated. For your safety we recommend to add another 0.5 m to the calculated distance.



Work positioning on a frame construction

184



W0081DR PROFI WORKER 3D standard fully adjustable fall arrest and rope access harness

RECOMMENDED GEAR

W9607 BLAST working helmet C006BH GRIPPY leather gloves W1010BB09 LOCKER guided type fall arrester K0122EE07 OXY triplelock light alloy oval carabiner K4241Z005 OVAL STEEL CONNECTOR triple lock



W0052B010 WORKING BAG transport bag for working harness



W1012WB W4400WW00 SITE + K370 REACTOR 140 work positioning shock absorber lanyard



W2016080 SLING LANYARD sewn sling

RD W2001 sewn sling



K9000BB03 PORTER plastic holder



Services & Activities









ROPE ACCESS

Rope access is called "royal discipline" in working at height activities. This working method is fast, effective, has little effect on the workplace and it is very quick to install and dismantle. It is used for a wide variety of work: cleaning, painting, inspection and other working situations.

Rope access or industrial climbing is a form of work, which applies practical ropework to allow workers to access difficult-to-reach locations without the use of scaffolding, cradles or an aerial work platform. Rope access technicians descend, ascend, and traverse ropes for access and work while suspended by their harness. Sometimes a work seat may be used. The support of the rope is intended to eliminate the likelihood of a fall altogether, but a back--up fall arrest system is used in case of the unlikely failure of the primary means of support. This redundancy system is usually achieved by using two ropes - a working line and a safety line.

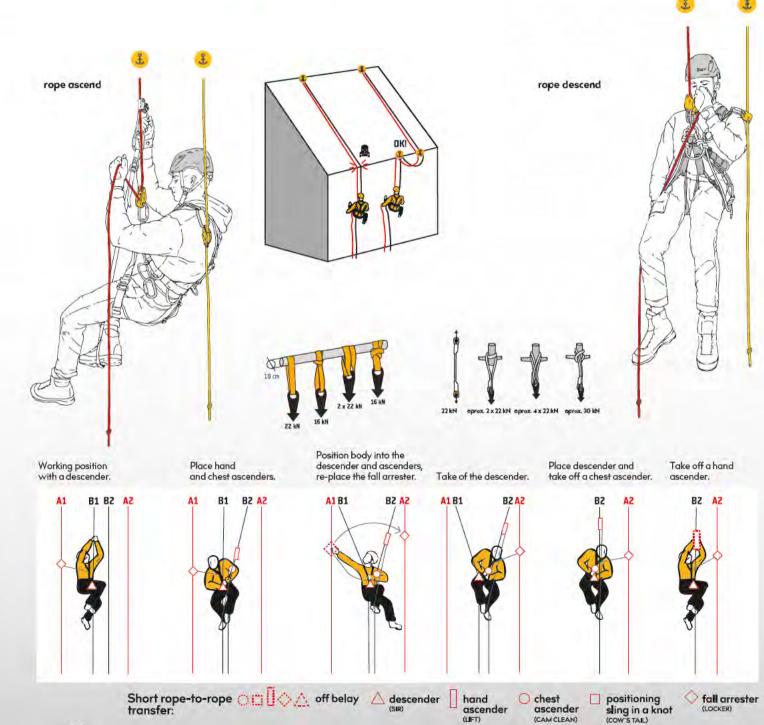

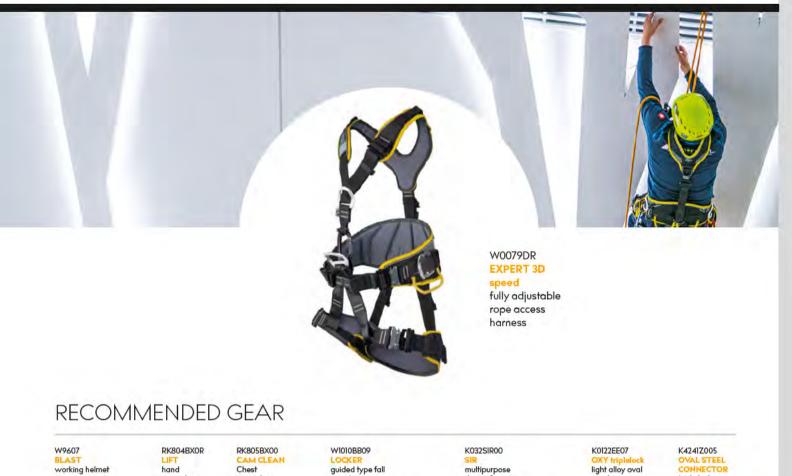







guided type fall arrester

multipurpose device for rope acces OXY triplelock light alloy oval carabiner

OVAL STEEL CONNECTOR triple lock





RK801EE00 PULLEY EXTRA lightweight pulley



W0010YB FRANKLIN work positioning seat





LING

W1015B020



W2001



L0450RR

SIR



K00500S03 ROLLER rope protector








PERMANENT LIFELINES

Permanent lifelines serve to secure workers in places where it is possible to set up fixed anchor point in the working place or near it. These are then interconnected by steel rope or a rail. For moving and securing, the worker uses connectors (EN 362) or special slider made for this purpose and supplied by the system manufacturer. The advantage of permanent lifelines is their long operating life and variability of use.

Fall arrest systems form an important element of the safety chain. When used correctly, they ensure sufficient absorption of fall energy, thus preventing the worker's body from being damaged. If the worker faints during or after fall, it is necessary to transport him to a safe place. The long hanging of unconscious body may have fatal consequences (trauma caused by hanging). Therefore keep in mind that fall arrest systems should be only used by trained workers. In case of need they should be able to aid each other at rescue and recovery action.

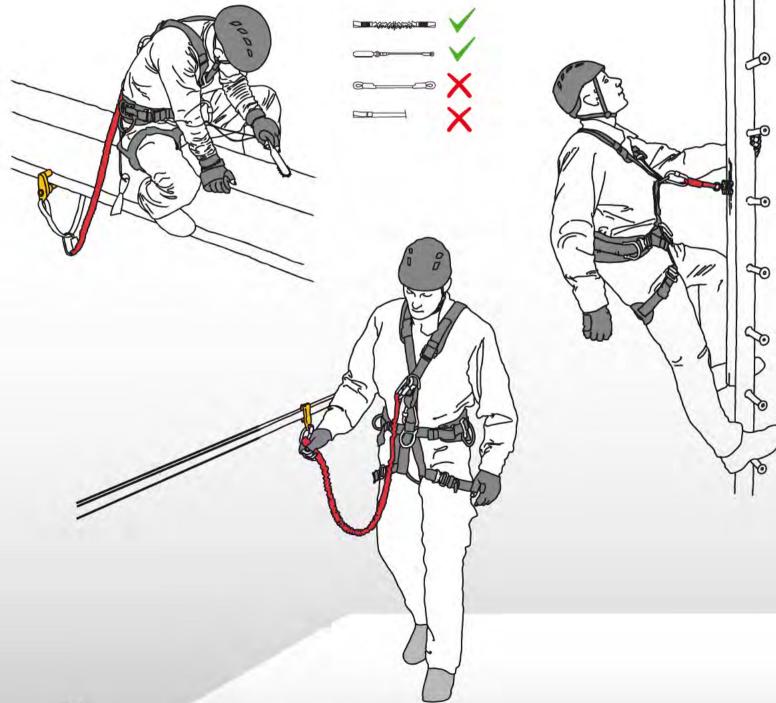







TREE CARE

An arborist is a professional in the practice of arboriculture, which is the cultivation, management, and study of individual trees, shrubs, vines, and other perennial woody plants in dendrology and horticulture. Arborists generally focus on the health and safety of individual plants and trees, rather than managing forests or harvesting wood.

Arborists who climb can use a variety of techniques to ascend into the tree. The least invasive, and most popular technique used is to ascend on rope.



One of the most effective options of getting into the tree is setting up ascent ropes from the ground. It is done by throwing a light bag carrying a thin rope over the required anchor point. The ascent system is then pulled by this light rope. There are two common methods of climbing: Single Rope System (SRS) and Moving Rope System (MRS).

Prior to starting work, the arborist in the tree must always have two independent adjustable positioning devices.





RECOMMENDED GEAR



RK804BX0R LIFT hand ascender

K0119EE00 BORA triplelock light alloy HMS carabiner



L0460RV00 **TILIA 11.5** static rope

K032SIR00 SIR multipurpose device for rope acces

SIR





W1028BY00

W9500Y OUSE arboristic throwing







ALL

RK800EE00

ULLEY S

weight pulley

durable and light



C0001YY00

arope

practical bag for

Sunging rock



W2608

with sewn eyes





L9031YX10

THROW LINE





























W2114 TREE ANCHOR anchor device



ARBO



W2001

sewn sling

RK807BX0 OT LIF foot ascender








ROPES COURSES AND ADVENTURE PARKS

Rope parks are a combination of climbing and professional activities. It is a leisure-time activity mainly carried out by people who are gaining the experience with climbing. This activity combines working as well as sport equipment. The person (client) is ideally dressed in a full body harness, connected to the steel rope with two connectors and these are connected to the harness by a textile sling or lanyard. In addition, the client is equipped with a tandem pulley, which is connected to the harness by a sling or lanyard.

Zip Line At zip line the client first attaches a tandem pulley to the steel rope, behind the pulley, client attaches the first and second back up sling with the connector. The whole weight of a client is in the pulley. Back up slings move freely behind the pulley.

> All the equipment used in the rope park must be checked every 12 months even if it is sports equipment.

Rope course elements are always divided by a platform, where client changes the connectors from a steel security rope to another one. The client always has to lock one security loop and the other security loop. It must never happen that both connectors are disconnected from the security steel rope at the same time. It is the same system as securing on via ferrata.

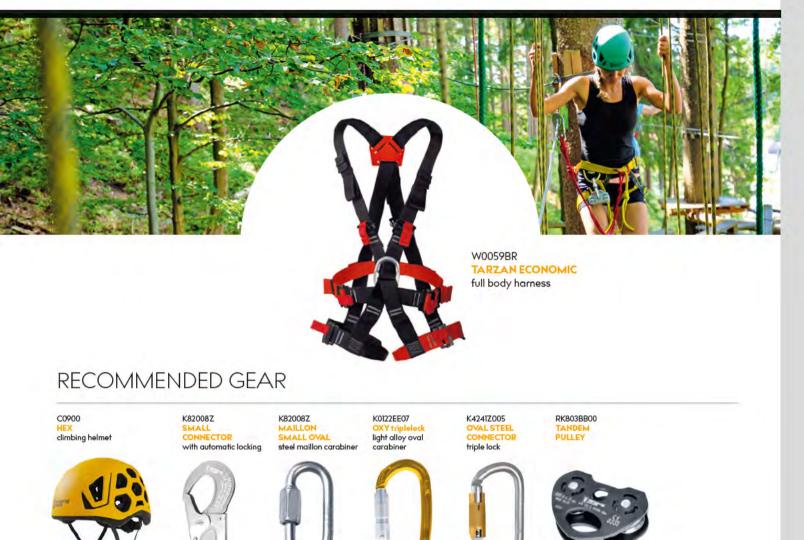

K9000BB03 plastic holder



C0053RW AID BAG (without contents)





W2200W100

S9000YY35 GEAR BAG waterproof bag



EVACUATION SET

K032SIR00 SIE multipurpose device









K4241Z005



RK800EE00 PULLEY SMALL durable and light triplelock light alloy oval weight pulley



0

K0122EE07

carabine




RK801EE00 PULLEY EXTRA durable and lightweight pulley




W1052XX00 RESCUE








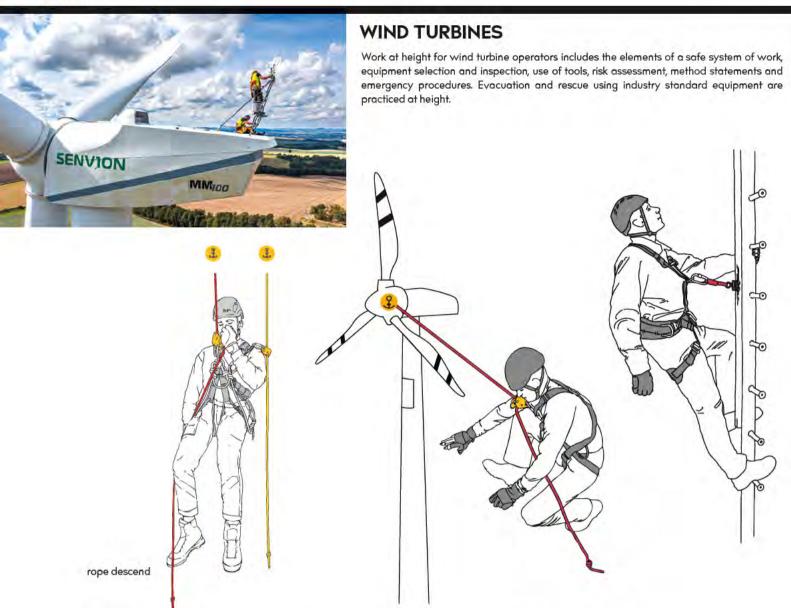

BASIC PULLEY SYSTEMS

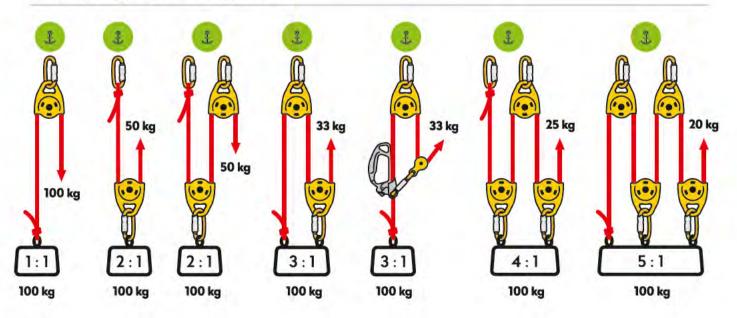



W0112BY WIND MASTER work harness for wind turbines maintenace

Charles as

RECOMMENDED GEAR

LIFT

RK804BX0R

W9607 BLAST working helmet







W1010BB09

guided type fall

RK805BX00 CAM CLEAN Chest ascender

K0119EE00 lock light alloy HMS carabiner

K4080ZO D STEEL CONNECTOR srew

K032SIR00 multipurpose device for rope

acces SIR



RK801EE00 EYEXTRA durable and lightweight pulley





RK8080500 XTRA PLUS



L045000 STATIC R44 11.0 150 m static rope W8100B PROTECTOR



W2300W150

88



W4462X085 REACTOR 140 ROPES "Y" 85 cm shock absorber



ACCESSORIES

K9001BB00 plastic holder

W0052B010 W0010YB WORKING BAG FRANKLIN

C0046BB TARP DUFFLE









Services & Activities



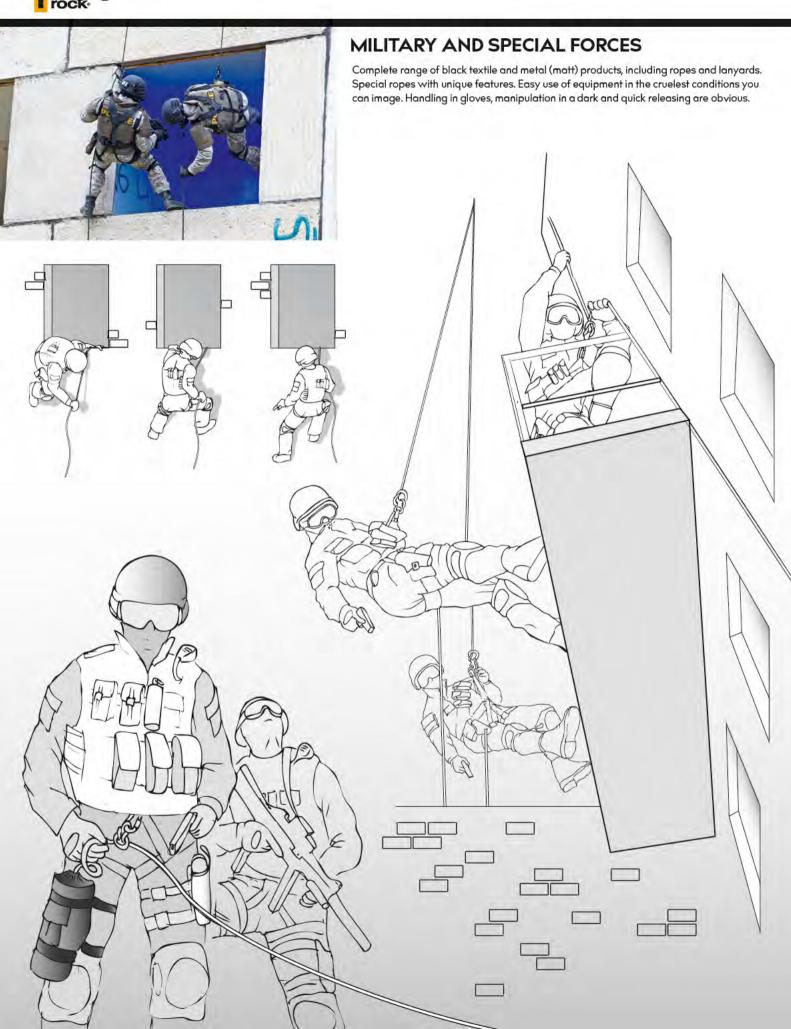

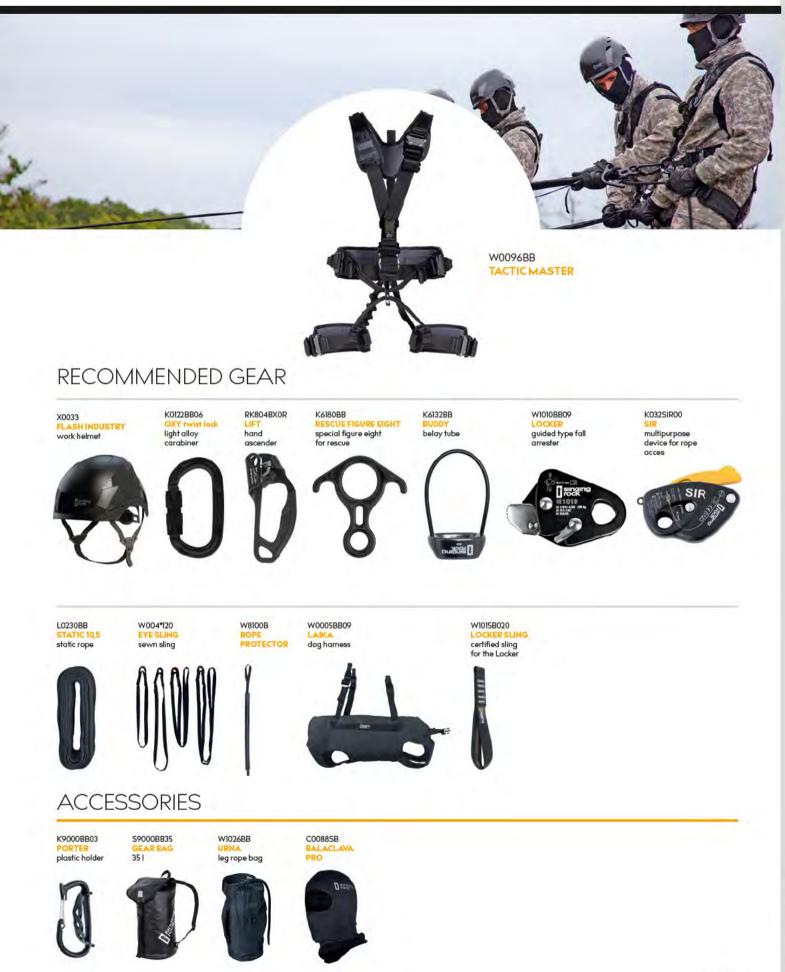

197





CABLEWAY EVACUATION

Ski lift or gondola evacuations utilize specialized rescue techniques and gear that must perform regardless of weather conditions.

The success of evacuation operations begins with having the proper ski lift or gondola evacuation gear and proper training and practice of the operating personnel.

If the chair lift or gondola fails, the person in charge must evacuate passengers according to the evacuation plan. Evacuation of a ski lift requires pecific techniques for movement along a cable. For maximum efficiency, these operations are led simultaneously by several independent teams.

Evacuation is a team effort and requires perfect coordination by everyone involved. SINGING ROCK team cooperates with ski resorts all over Czech Republic to improve rescue methods and develop a new gear.

/

/



W0079DR EXPERT 3D speed fully adjustable rope access harness

RECOMMENDED GEAR



INDEX

PRODUCT NAME	PAGE
ACCESSORIES	195
ACCESSORIES	197
ACCESSORY CORD	54
ACCESSORY CORDS	57
ACCORD 8.3	51
ACCORD DRY 8.3	51
ADJUST	122
ALADIN	33
ANCHORING	178
ANTISHOCKI	21
APOLLO PANTS	151
APOLLO SHORTS	151
ARBO CHEST	33
ARBO MASTER	34
ARBO SITE	121
ATIKA ROPE PROTECTOR	54
AXILLAR	123
BABY RESCUE BAG	37
BACK-UP	95
BALACLAVA PRO	162
BANNER BAG	168
BANNERS	170
BANTAM BEAMER	103
BARK PULLEY SAVER	120
BARK RING SAVER	121
BASEBALL HAT	160
BASEBALL HAT LIGHT	160
BASIC	25
BASIC LIGHT	25
BASIC PULLEY SYSTEMS	194
BEACH FLAG	170
BEANIE	161
BEANIE HAT	162
BEANIE POLAR	161
BEANIE PRO	161
BEER MAT	164
BELAYER	199
BELT	166
BIG CONNECTOR	67
BIG SQUARE	66
BIG TWIST	66
BLAST	76
BLAST PADDING	87
BODY II ENERGY SPEED	24
BODY II SPEED	23
BODY II STANDARD	23
BORA / SCREW, BORA / TWL	
BORA / TRIPLE LOCK	61
BORA GP / SCREW	61
BUDDY	92

	12.4
CABLEWAY EVACUATION SYSTEM	134
	94
	110
	139
CLASSIC ADAPTOR (PAIR)	84
	62
COLT SCREW 3PACK	62
CONDOM	169
CONNECTION STRAP	27
CONNECTOR GIGA	67
CONTRA 10.5	47
COVER	85
COVER SMOKE	85
COW'S TAIL	53
CUBE	139
CULTER	148
D – MOBILE	102
D STEEL / SCREW	67
D STEEL / TRIPLE LOCK	67
DEFENDER	55
DNA DRY 8.9	48
DOUBLE STOP PLUS	90
DRY BAG	139
DRY DUFFLE	140
DURAN10.4	51
DYNAMIC ROPES	56
EASY LIFT	98
EDGE ROLLER	55
EDGE ROLLER - PART	55
ELECTRIC ARC VISOR	84
EVACUATION SET	193
EVACUATION TRIANGLE COMBI II	36
EVACUATION TRIANGLE SIT II	36
EVAQ CASE WITH SEALING	113
	112
EVAQ ROPE	112
EXPERT 3D / SPEED	12
EXPERT 3D / SPEED STEEL	13
EXPERT 3D / STANDARD	13
EYESLING	116
FALCONER 3/4	146
FALCONER 5/4	
	146
	146
FALL ARRESTER SET	132
	178
FAVORABLE COMBINATIONS	26
FIGURE 8L	93
FIGURE 8M	93
	123
FIRST AID BAG	144

FIRST AID BAG - LARGE	144
FIXING MATERIAL FOR GROUND AND WALL	
SLEEVE	109
FLASH	77
FLASH ACCESS	78
FLASH AERO	78
FLASH INDUSTRY	78
FLASH PADDING	87
FLAT WEBBING	122
FOOT LIFT	94
FOOTER II	126
FOOTER XP	127
FORGING	70
FRANKLIN	31
GEAR BAG	138
GEMINI DRY 7.9	52
GLUE IN ANCHOR	102
GRIPPY	147
GRIPPY 3/4	147
GROUND COFFEE OUTDOOR	165
GYM 10.1	50
HAMMER CORD	54
HARNESS PADDING	27
HECTOR / SCREW	60
HECTOR / TRIPLE LOCK	60
HECTOR BC / SCREW	
HECTOR BC / TRIPLE LOCK	60
HELMETS	83
HERO 9.6	49
HERO DRY 9.6	48
HEX	81
HEX PADDING	87
HOODY	155
HOODY FULL ZIP	156
HOODY JUNIOR	157
HOOK PARKING LOOP	28
нот	70
ICON 9.3	48
ICON DRY 9.3	48
IKAR AAS-1 CANTILEVER ARM	108
IKAR DB-A3 TRIPOD	111
IKAR GROUND SLEEVE	108
IKARH	106
IKAR HRA	106
IKAR HRA TRIPOD CONSOLE	111
IKAR HWB	105
IKARHWS	105
IKAR LOWER GROUND SLEEVE	109
IKAR LOWER GROUND SLEEVE CORE HOLE	109
IKAR MOBILE ATTICS BASE	110

IKAR MOBILE GROUND BASE	109
IKAR PLW WINCH	111
IKAR WALL SLEEVE	108
IKAR WINCH CANTILEVER ARM CONSOLE	110
IKAR WINCH TRIPOD CONSOLE	111
INDY EVO PLUS	91
JACOB	126
JACOB DYNEEMA	126
JINGLE II	119
JOULE	131
KATA 9.7	49
KATA DRY 9.7	49
KEY HOLDER	166
KEYLOCK	70
KIDS HOODY	157
KNOTS	179
LAIKA	36
LAMPFIX	87
LANYARD "I"	117
LANYARD "V"	117
LIFT	94
LIST OF SINGING ROCK POLYGON TRAINING	
CENTERS	176
LOCKER	95
LOCKER SLING	95
MAILLON BIG D	66
MAILLON BIG DELTA	66
MAILLON MINI OVAL	66
MAILLON SMALL DELTA	66
MAILLON SMALL OVAL	66
MINID	68
MINI D SCREW	69
MINI D SCREW 40 PACK	69
MINIPEAR	68
MONTY BAG	141
MOVEMENT BAG	138
NOTEPAD A5	169
NUMBER	70
OPEN SLING	116
OPEN SLING 14 MM	116
OVAL STEEL / SCREW	67
OVAL STEEL / TRIPLE LOCK	67
OVERALL	149
OXY / SCREW, OXY / TWL,	63
OXY / TRIPLE LOCK	63
OXY BC / SCREW, OXY BC / TWL	63
OXY BC / TRIPLE LOCK	63
OZONE / SCREW, OZONE /	65
PALM CONNECTOR	67
PAPER BAG	168
PAPER DAG	51
PATRON LANYARD	120
PENTA	79
PENTA JUNIOR	80
	00


PENTA PADDING	87
PILOT R3	99
PITCHER	164
POLEII	26
POLO T-SHIRT	153
POLYGON	174
PORTER	68
PORTER XL	68
POSTERS	171
PPE INSPECTION SET	133
PRODUCTION	
PROFI WORKER 3D / SPEED	15
PROFI WORKER 3D / STANDARD	16
PROTECTIVE CASE	140
PROTECTIVE SLEEVE FOR SRL	106
PRUSIK SLING	118
PULLER	95
PULLEY EXTRA	96
PULLEY EXTRA PLUS	96
PULLEY MIKY	97
PULLEY SLING	118
PULLEY SMALL	97
PULLEY TWIN	96
RAMA	91
RAMA SET	91
REACTOR 140	128
RECOMMENDED GEAR	181
RECOMMENDED GEAR	183
RECOMMENDED GEAR	185
RECOMMENDED GEAR	187
RECOMMENDED GEAR	189
RECOMMENDED GEAR	191
RECOMMENDED GEAR	193
RECOMMENDED GEAR	195
RECOMMENDED GEAR	197
RECOMMENDED GEAR	199
REDBLOCK	100
	28
RESCUE BAG	140
RESCUE FIGURE EIGHT	93
RESCUE KNIFE	148
RESCUE POLE	145
RESCUE RATCHET	123
RESCUE SET	135
RETRACTABLE TYPE FALL ARRESTERS:	105
RIGGING PLATE 1/3	98
RIGGING PLATE 3/5	98
RING	99
RING SLING	119
RINGO	99
RL CHEST ROCK &LOCK	33
	10
ROCKLIFE T-SHIRT LONG SLEEVE ROOF MASTER	154 19
	17

ROOFER SET	132
ROOFER SET	183
ROPE BAG	143
ROPE PROTECTOR	55
ROPEDANCER II	22
ROPEMARKER	53
ROUTE 44	44
SAFE 2 FLEX CARRIER	84
SAFE NYLON MESH VISOR	84
SAFE PC	
SAFE STEEL MESH VISOR	84
SCAFFOLDER SET	133
SCAFFOLDER SET	181
SCARF	163
SCORE 10.1	50
SCORE DRY 10.1	50
SEAMASTER 3D STAINLESS STEEL	21
SECURE EARMUFFS	86
SHUTTLE	92
SINGING ROCK PEN	169
SINGING ROCK STICKERS	170
SIR	90
SIT WORKER 3D / SPEED	30
SIT WORKER 3D / STANDARD	30
SITE	100
SITELANYARD	101
SLING LANYARD	117
SMALL CONNECTOR	66
SNAKE BRACE	103
SNAPBACK HAT	160
SPEED BELT	166
SPELEO	47
SPELEO R44 10.5	47
SPELEO ROPES	57
STAINLESS HANGER PLATE / WITH BOLT	102
STATIC 10.5	45
STATIC 11.0	45
STATIC 9.0	46
STATIC R44 10.5	44
STATIC R44 11.0	44
STATIC R44 NFPA 10.5	46
STATIC R44 NFPA 11.0 (7/16")	46
STATIC R44 NFPA 13.0 (1/2")	46
STATIC ROPES	56
STEEL ANCHOR	125
STEEL LANYARD "I"	125
STITCHED EYE	44
STORM 9.8	50
STORM DRY 9.8	49
STRAP FOR CAM CLEAN	94
SUSPENSION TRAUMA SAFETY STRAP	28
T - SHIRT BACKBONE JUNIOR	157
TACTIC MASTER	20
TANDEM PULLEY	97
	71

138
22
171
17
17
27
70
168
53
54
47
118
142
127
127
141

TRACK PLUS	122
TRAVEL MUG	165
TREE ANCHOR	121
TREEMOUSE	145
TRIPOD BAG	141
TRUCKER HAT	160
T-SHIRT ACTIVE LONG SLEEVE	155
T-SHIRT BACKBONE	152
T-SHIRT COOL	154
T-SHIRT MONKEY	156
T-SHIRT ROCKET	152
T-SHIRTS BLUE MOUNTAIN	153
TUBULAR WEBBING	122
TWISTER	100
TWL, OZONE / TRIPLE LOCK	65
ULTRASONIC	44

UNIQUE	
URBANII	31
URNA	142
USB FLASH DRIVE	167
VERTICAL FIXED BEAM CLAMP	103
WHOLE BEAN COFFEE CAN	164
WINDMASTER	18
WORKKNIFE	148
WORKING BAG	142
WORKING PANTS	149
WRISTBAND	168
XSTREAM LD	86
ZINC PLATED HANGER PLATE / WITH BOLT	102

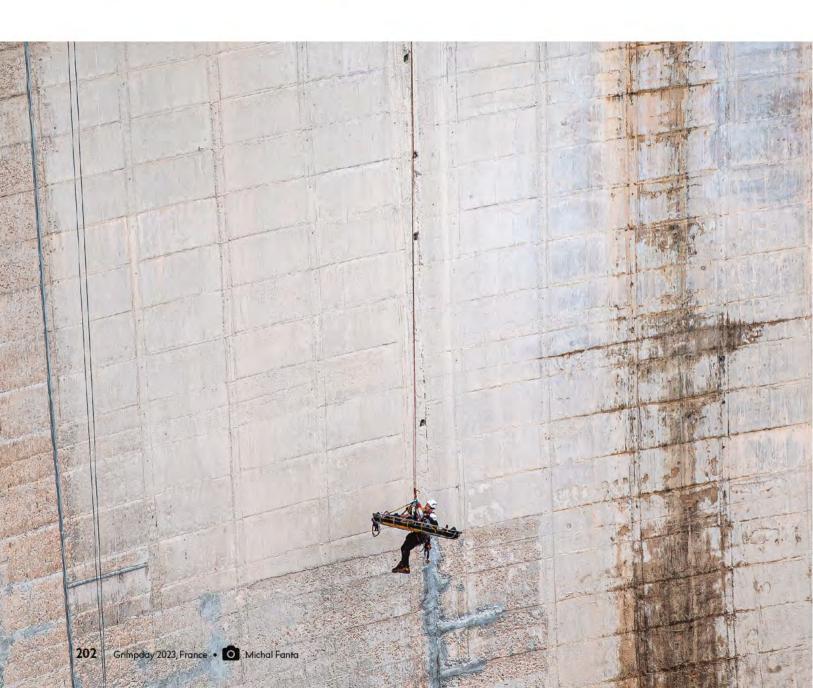



INDEX

PRODUCT NUMBER	PAGE
A4072YX04	106
W0078DB	13
W0079DB	12
W0082DB	15
W9602QX00	78
1RK715XX12	102
A0002SS01	102
A0031BS	148
A003OY	148
A0050HH00	148
A4000S060	105
A40005090	105
A40005120	105
A40005240	105
A4000W018	105
A4000W028	105
A4000W035	105
A4002BS33	105
A4002BS42	106
A4002B542 A4004BS12	
A4004BS12	106
A4004BS33	106
A4064XX30	111
A 4070XX00	141
A4072YX	106
A4072YX02	106
A4072YX03	106
COO01BB	143
C0001YY00	139
C0006BH	147
C0006HH	147
C0012YB	146
C0013YB	146
C0014YB	146
C0035AO12	122
C0037BB12	122
C0037RR12	122
C0046B120	138
C0046BB70	138
C0046BB90	138
C0051BH	160
C0051HH	160
C0053RW	144
C0054BX	161
C0055BX	161
C0058RR00	144
C0069	162
C0069BG00	162
C0069PB00	162
C0070SL00	160
C0073BY00	138
C0074BY00	160
C0079BX00	163
C0080BX00	163
C0087SB	161
C0088SB	162
C0089SX00	160

C0090BB00	10
C0091	7
C0091FX02	7
C0091FX03	7
C0091FX05	7
C0091GX02	7
C0091GX03	7
C0091GX05	7
C0091JY02	8
C0091SX02	7
C0091SX03	7
C0091SX05	7
C0091YX02	7
C0091YX03	7
C0091YX05	7
C0092XX	8
C0900AX03	٤
C0900AX04	٤
C0900MX03	٤
C0900MX04	ξ
C0900RX03	ŧ
C0900RX04	8
C0900WX03	٤
C0900WX04	ε
C0900YX03	٤
C0900YX04	٤
C0901SB	8
C1013BB	15
C1014BB	15
C1018BY	15
C1019BY	15
C1020BY	15
C1028VX	15
C1029VX	15
C1030Y	15
C1031M	15
C1032MM	15
C1033MM	15
C1034SS0	15
C1035SS0	15
C1036VX	15
C1037AX	15
C1038B	15
C1039B	15
C2150BY	12
C2151BY00	12
C5056	3
C9091XX	16
C9092BX	16
C9092XX	16
E0015XX	5
K0006RP00	10
K0016AA00	6
K0016BB00	6
K0017AA00	6
K0017BB00	6

K0018BB00	65
K0027BY00	69
K0027BY40	69
K0027YX00	69
K0030OG00	100
K0043OX00	91
K0043SX00	91
K0050OS01	55
K0050OS03	55
K0101BX00	91
K0107BB00	61
K0107BP00	61
K0107EE00	61
K0107EP00	61
K0108BB00	61
K0108EE00	61
K0112BB00	62
K0112EE00	62
K0112XX30	62
K0114BB00	60
K0114BC00	60
K0114EC00	60
K0114EE00	60
K0119BB00	61
K0119EE00	61
K0121BB00	60
K0121BC00	60
K0121EC00	60
K0121EE00	60
K0122BB05	63
K0122BB06	63
K0122BB07	63
K0122EE05	63
K0122EE06	63
K0122EE07	63
K0123BC05	63
K0123BC06	63
K0123BC07	63
K0123EC05	63
K0123EC06	63
K0123EC07	63
K0124ST09	67
K0124SY09	67
K031DSD00	90
K032SIR00	90
K04000BB	95
K3536PP00	67
K3550PP00	67
K3690ZO	66
K3702PP	66
K4080ZO	67
K4081ZO	67
K4241ZO05	67
K424IZO07	67
K5052EE00	68
K5182EE00	68
K6021BB	93

K602IEE93K603IEE93K603IEE93K603IEE93K6132EB92K6140EB0092K6140EB0192K6140EB0293K7002EX4699K82006Z66K82007Z66K82107Z66K82107Z66K8207Z66K8208B368L000264L000354L000354L0020B8068L002154L0220WR46L0220WR45L0230B45L0230B45L0230WR45L0230WR45L0240WR45L0250B845L0250B845L0250WR45L0250WR45L0250WR45L0250WR45L0250WR45L0250WR45L0250WR45L0250WR45L0250WR45L0340AX51L0340AX51L0340AX51L0340AX44L0430WR44L0430WR44L0430WR44L0440WR47L0440WR47L051051L051051L0540EN053L0540EN053L0540EN053L0540FA49L0540A49L0540A49L0540A49L0540A49 <th></th> <th></th>		
K4031EE 93 K4032EB 92 K4102E00 92 K4100B00 92 K4100E00 93 K7002BX46 99 K820072 66 K8220072 66 K822007 66 K82007 66 K82008 68 K9001B800 68 L0002 54 L0003 54 L0020WR 46 L0220WR 45 L0230WR 45 L0230WR 45 L0240WR 47 L0250WR 45 L0250WR 45 L0250WR 45 L0250WR 45 L0250WR 45 L04300KX 41 </td <td>K6021EE</td> <td>93</td>	K6021EE	93
K43128B 92 K43128E 92 K43128E 92 K4140EE00 92 K4180BB 93 K7002BX44 99 K82006Z 66 K82007Z 66 K82107Z 66 K821002 68 L0003 54 L0003 54 L0220B 45 L0230R 45 L0230R 45 L0250WR 45 L0250WR 45 L0250WR 46 L0340AX 51 L034		
Kól32EE92Kól40BB0092Kól40EE0092Kól80BB93K7002BX4699K82008Z66K82008Z66K82008Z66K82107Z66K82310Z66K82407Z66K82407Z66K82508Z66K900BB0368L000254L000354L002054L0220BR46L0220BR45L0230KK45L0230KR45L0240WR47L0250BB45L0250VR45L0250VR45L0250VR45L0250VR45L02647L036G50L036G50L036VK44L0430VR44L0430VR44L0430VR44L0430VR44L0430VR44L0430VR44L0430VR44L0430VR44L0430VR44L0430VR44L0430VR44L0430VR44L0430VR44L0450V047L051051L0520GW48L0540H5053L0540H5053L0540H5053L0540F5053L0540F5053L0540F5053L0540F5053L0540F5053L0540F5053L0540F50<		
K6140BB00 92 K6140EE00 92 K6180BB 93 K7002BX46 99 K82008Z 66 K82008Z 66 K82007Z 66 K82107Z 66 K8210Z 66 K82308Z 66 K900BB03 68 L0002 54 L0003 54 L0020 54 L0020BB 46 L0220BB 46 L0230B 45 L0230RR 45 L0230RR 45 L0230RR 45 L0240WR 47 L0250WR 45 L0250WR 45 L026 47 L0340AX 51 L0360GG 50 L0340AX 51 L0360FX 48 L0430B 44 L0430B 44 L0430RR 44 L0450CO 44 L0450RR		
Kól40EE0092Kól80BB93K7002BX4699K82006Z66K82008Z66K82107Z66K8210Z66K8210Z66K8200BD368K900BB0368L000254L000354L0020BB46L0220BR46L0230RR45L0230RR45L0230RR45L0250BR45L0250BR45L0230RR45L02477L0250B45L0250RR45L0250RR45L02677L0340AX51L0360GG50L0364LA0050L0360RR44L0430RR44L0430RR44L0430RR44L0430RR44L0430RR44L0430RR44L0430RR44L0430RR44L0430RR44L0430RR44L0430RR44L0450R44L0450R44L0450R44L0450R44L0450R45L051451L051451L0524GW48L054045053L054045053L054045053L054045053L054045053L054045053L054045053L054045053L054045053<		
K4808B 93 K7002BX46 99 K82006Z 66 K82008Z 66 K82007Z 66 K8210Z 66 K8210Z 66 K8210Z 66 K8200BB03 68 L0002 54 L0003 54 L0020BB3 45 L0220WR 46 L0220WR 45 L0220WR 45 L0230BB 45 L0230BR 45 L0230WR 45 L0240WR 47 L030BB 45 L0250WR 45 L026 47 L0340AX 51 L0340AX 51 L0340AX 51 L0340AX 51 L0340AX 51 L0430BB 44 L0430BB 44 L0430WR 47 L0430BB<		
K7002BX46 99 K82006Z 66 K82008Z 66 K82007Z 66 K82010Z 66 K82010Z 66 K82002 66 K9000803 68 L0002 54 L0003 54 L00208 46 L02208 46 L02308 45 L02308 45 L0230R 45 L0230R 45 L0230R 45 L0230R 45 L0230R 45 L0230R 45 L0240WR 47 L0250B 45 L0250R 45 L026 47 L0364LA00 50 L0364LA00 50 L0364RX 48 L0430R 44 L0430R 44 L0430R 44 L0430R 44 L0430R 44 L0430R 44 <td></td> <td></td>		
K82006Z66K82008Z66K82207Z66K82207Z66K82310Z66K82410Z66K82508Z66K9000BB0368L000254L000354L0020BB46L0220BB46L0220BB46L0220BB45L0230R45L0230R45L0250B45L0250B45L0250B45L0250WR45L0250WR45L02647L0360GG50L0364LA0050L0364LA0050L0364LA0050L0364LA0050L0364LA0044L0430WR44L0430WR44L0430WR44L0430WR44L0430WR44L0430WR44L0430WR44L0430WR44L0450CO44L0450CO44L0450WG47L051051L0520GW49L0540C45053L0540F353L0540F353L0540F353L0540F353L0540F353L0540F353L0540F353L0540F353L0540F353L0540F353L0540F353L0540F353L0540F353L0540F353L0540F3 <t< td=""><td></td><td></td></t<>		
K82008Z 66 K82007Z 66 K82207Z 66 K82300Z 66 K82300Z 66 K8240Z 66 K82508Z 66 K82508Z 66 K82000BB03 68 L0002 54 L0003 54 L0020WR 64 L0220BB 46 L0220WR 46 L0220WR 45 L0230RR 45 L0230RR 45 L0250WR 45 L0250WR 45 L0250WR 45 L0250WR 45 L0250WR 45 L026QQ 47 L0340AX 50 L0360GG 50 L0360GG 50 L0360KK 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0450CO 44 L0450CO 44 L0450WG 47 L0540WR 47 L0540BB0 53 L0540B450 53 L		
K82207Z 66 K82210Z 66 K82310Z 66 K82410Z 66 K82508Z 66 K900BB03 68 L0002 54 L0003 54 L00041 - L0081 54 L0220BB 46 L0230BB 45 L0230BB 45 L0230RR 45 L0230VR 45 L0240VR 47 L0250B 45 L0240VR 47 L0350R 45 L026 47 L0340AX 51 L0340AX 51 L0340AX 51 L0340AX 51 L0340AX 51 L0340AX 51 L0340R 44 L0430R 44 L0430R 44 <td></td> <td></td>		
K82210Z 66 K82310Z 66 K82310Z 66 K82410Z 66 K82508Z 66 K9000BB03 68 L0002 54 L0003 54 L0020WR 46 L0220BB 46 L0230BB 45 L0230RR 45 L0230RR 45 L0230WR 45 L0230WR 45 L0230WR 45 L0230WR 45 L0230WR 45 L0250B 45 L0250WR 45 L0250WR 45 L0250WR 45 L026 47 L0340AX 51 L0360GG 50 L0340XK 48 L04300K 44 L04300K 44 L04300K 44 L04300R 44 L04300R 44 L04300R 44 L04300R 44 L04300R 44		
K82310Z 66 K8240Z 66 K82508Z 66 K9000BB03 68 L0002 54 L0003 54 L0020BB 46 L0220BB 46 L0230RR 45 L0230RR 45 L0230VR 45 L0230VR 45 L0230VR 45 L0230VR 45 L0230VR 45 L0240WR 47 L0250BB 45 L026 47 L0250VR 45 L0260WR 45 L0250WR 45 L0260WR 45 L0260WR 45 L0340AX 51 L0360GG 50 L0360KK 44 L04300R 44 L0430WR 47 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 47 L0430WR 47 L0430WR 47		
K8240Z 66 K82508Z 66 K9000BB03 68 L0002 54 L0003 54 L0020BB 46 L0220BB 46 L0220BB 45 L0230RR 45 L0230VR 45 L0230VR 45 L0230VR 45 L0230VR 45 L0230VR 45 L0240WR 47 L0250BB 45 L0250VR 45 L026 47 L0340AX 51 L026 47 L0360GG 50 L0360GG 50 L0360KK 44 L04300R 44 L0430RR 44 L0430RR 44 L0450CO 44 L0450RR 44 L0450RR 44 L0450RR 44 L0450RR 44 L0450RQ 47 L0514 51 L0520GW 49 <		
K82508Z 64 K9000B03 68 K9001B600 68 L0002 54 L0003 54 L001-L0081 54 L0220BB 46 L0220BB 45 L0230BC 45 L0230BC 45 L0230R 45 L0230RR 45 L0240WR 45 L0250BB 45 L0230RR 45 L0250BB 45 L0250BB 45 L0250BR 45 L0250RR 45 L0250WR 45 L026 47 L0340AX 51 L0360GG 50 L0360GG 50 L0380YX 48 L04300R 44 L0430RR 44 L0430RR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0400V00 47 <		
K9000BB0348K9001BB0048L000254L000354L001-L008154L0220BB46L0220BB45L0230BC45L0230RR45L0230RR45L0240WR47L0250BB45L0230RR45L0250BB45L0250BB45L0250WR45L0250WR45L0250WR45L0250WR45L0250WR45L0250WR45L036GG50L0364LA0050L0364LA0050L0380YX48L0430BB44L0430BB44L0430RR44L0430WR44L0430WR44L0450WG44L0450WG44L0450WG44L0450WG44L0450WG47L051051L051451L0524GW48L0540B5053L0540B45053L0540B45053L0540B45053L0540B45053L0540B45053L0540B45053L0540B45053L0540B45053L0540A49L0520GW49L0540A49L0540A49L0540A49L0540A49L0540A49L0540A50L0540A50L05		
K9001BB00 68 L0002 54 L0003 54 L0041 - L0081 54 L0200BB 46 L0200RR 45 L0230RR 45 L0230RR 45 L0230WR 45 L0230WR 45 L0230WR 45 L0230WR 45 L0240WR 47 L0250BB 45 L0250WR 45 L0260WR 45 L0260WR 45 L0260WR 45 L0260WR 45 L0260WR 45 L0340AX 51 L0360GG 50 L0340AX 51 L0360GG 50 L0340AX 51 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0450WG 47 L0450WG 47 L0450WG 51 L0540WG 53		
L000254L000354L0041 - L008154L0220BB46L0220WR45L0230BB45L0230RR45L0230WR45L0230WR45L0240WR47L0250BB45L0250BB45L0250WR45L0250WR45L02647L0340AX51L0360GG50L0364LA0050L0380YX48L0430BB44L0430WR44L0430WR44L0430WR44L0430WR44L0450OO44L0450WG47L051051L051451L0520GW49L0520GW49L0540BB051L0540BB051L0540BB051L0540BB051L0540C45053L0540PXX51L0540AA49L0540AA49L0540AA49L0540AA49L0540AA49L0540AA49L0540AA52L0540AA52L0540AA52L0540AA52L0540AA53L0540AA54L0540AA54L0540AA54L0540AA54L0540AA54L0540AA54L0540AA54L0540AA54L0540AA54L0540AA <td></td> <td></td>		
L0003 54 L0041 - L0081 54 L0200BB 46 L0200WR 46 L02030BB 45 L02030RR 45 L0230WR 45 L0230WR 45 L0230WR 45 L0240WR 47 L0250BB 45 L0250WR 45 L0250WR 45 L026 47 L0360GG 50 L0364LA00 50 L0364LA00 50 L0384XX 48 L0430BB 44 L0430BB 44 L0430RR 44 L0430RR 44 L0430WR 47 L0430WR 44 L0430WR 44 L0450WG 47 L0450WG 47 L0450WG 47 L0510 51 L0540W 48 L0540WG 47 L0520GW 49 L0540BB00 51 L0540BB00 51 </td <td></td> <td></td>		
L0041 - L0081 54 L0220BB 46 L0220WR 46 L0230BB 45 L0230RR 45 L0230WR 45 L0230WR 45 L0240WR 47 L0250BB 45 L0250WR 45 L0250WR 45 L026 47 L0360GG 50 L0364LA00 50 L0364LA00 50 L038WX 48 L038WX 48 L0430BB 44 L0430RR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0450WG 47 L0450WG 47 L0510 51 L0514 51 L0520GW 49 L0540BB0 53 L0540BB0 53 L0540BB0 53 L0540BB00 53 <td></td> <td></td>		
LO220BB 44 LO220WR 46 LO230BB 45 LO230RR 45 LO230WR 45 LO230WR 45 LO250BB 45 LO250BB 45 LO250WR 45 LO250WR 45 LO260WR 45 LO250WR 45 LO260WR 45 LO340AX 51 LO360GG 50 LO360GG 50 LO380YX 48 L0430BB 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0450WG 47 L0450WG 47 L0460 47 L0450WG 47 L0510 51 L0520GW 49 L0540BE0 53 L0540BE0 53 L0540BE0 53 L0540H50 53		
L0220WR 46 L0230BB 45 L0230RR 45 L0230WR 45 L0230WR 45 L0240WR 47 L0250BB 45 L0250WR 45 L0250WR 45 L0250WR 45 L026 47 L0340AX 51 L0360GG 50 L0364LA00 50 L0380YX 48 L0430BB 44 L0430BB 44 L0430RR 44 L0430RR 44 L0430WR 47 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0450OO 44 L0450WG 44 L0450WG 47 L0510 51 L0514 51 L0520GW 49 L0540850 53 L0540850 53 L0540850 53 </td <td></td> <td></td>		
L0230BB 45 L0230KK 45 L0230RR 45 L0230WR 45 L0240WR 47 L0250BB 45 L0250BR 45 L0250WR 45 L0260WR 45 L0250WR 45 L0260WR 45 L0260WR 45 L0260WR 45 L0340AX 51 L0360GG 50 L0364LA00 50 L0380YX 48 L0430BB 44 L0430RR 44 L0430RR 44 L0430WR 47 L0430WR 44 L0450WG 44 L0450WG 44 L0450WG 47 L0510 51 L0520GW 49 L0540C450 53 L0540B50 53 L0540B60 51 L0540F3 53 L0540F3 51 L0540F3 51 <		
L0230KK 45 L0230RR 45 L0230WR 47 L0240WR 47 L0250BB 45 L0250WR 45 L0250WR 45 L0260WR 45 L0260WR 45 L0260WR 45 L0260WR 45 L0260WR 45 L0340AX 51 L0360GG 50 L0364LA00 50 L0384PX 48 L0430BB 44 L0430KK 44 L0430RR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0440WR 47 L0450BB 44 L0450WG 47 L0510 51 L0540W 48 L0540W 49 L0540BB00 51 L0540B50 53 L0540B50 53	L0220WR	46
L0230RR 45 L0230WR 45 L0240WR 47 L0250BB 45 L0250RR 45 L0250WR 45 L026 47 L0340AX 51 L0360GG 50 L0364LA00 50 L0380YX 48 L0430BB 44 L0430BB 44 L0430WR 44 L0450BB 44 L0450BB 44 L0450WG 47 L0450WG 47 L0510 51 L0514 51 L0520GW 49 L0540B50 53 L0540B60 51 L0540B60 51 L0540C450 53 L0540AA 49 L0580AA 49 L0580AA 49 L0580AA 49 L0540GA00 50		45
L0230WR 45 L0240WR 47 L0250BB 45 L0250RR 45 L0250WR 45 L026 47 L0340AX 51 L0360GG 50 L0364LA00 50 L0380YX 48 L0430BB 44 L0430BB 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0450BB 44 L0450WG 44 L0450WG 47 L0510 51 L0510 51 L0520GW 49 L0540B50 53 L0540B50 53 L0540B50 53 L0540B50 53 L0540B50 53 L0540B50 53 L0540A 49 L0540A 49 L0540A 49 L0580AA 49 </td <td>L0230KK</td> <td></td>	L0230KK	
L0240WR 47 L0250BB 45 L0250WR 45 L0250WR 45 L026 47 L0340AX 51 L0360GG 50 L0364LA00 50 L0380YX 48 L0430BB 44 L0430BB 44 L0430RR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0450BB 44 L0450BB 44 L0450WG 44 L0450WG 47 L0450WG 47 L0510 51 L0514 51 L0520GW 49 L0540B450 53 L0540B450 53 L0540C450 53 L0540B450 53 L0540AA 49 L0580AA 49 L0580AA 49 L0500AA 52 L3040GA00 50	L0230RR	45
L0250BB 45 L0250RR 45 L0250WR 45 L026 47 L0340AX 51 L0360GG 50 L0364LA00 50 L0380YX 48 L0430BB 44 L0430BB 44 L0430RR 44 L0430WR 44 L0430WR 44 L0450BB 44 L0450BB 44 L0450WG 44 L0450WG 44 L0450WG 44 L0450WG 47 L0510 51 L0510 51 L0510 51 L0520GW 49 L0540B450 53 L0540B450 53 L0540B450 53 L0540B450 53 L0540AA 49 L0580AA 49 L0580AA 49 L0540GA00 50	L0230WR	45
L0250RR 45 L026 47 L0340AX 51 L0360GG 50 L0364LA00 50 L0380YX 48 L0380RX 48 L0430BB 44 L0430RR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0450BB 44 L0450BB 44 L0450BB 44 L0450WG 47 L0450RR 44 L0450WG 47 L0510 51 L0510 51 L0520GW 49 L0520GW 49 L0540B450 53 L0540B450 53 L0540B450 53 L0540AA 49 L0540AA 49 L0580AA 49 L0500 53 L0540AA 49 L0540AA 49 L0540AA 49 L0540AA 49 L0540AA 49 <	L0240WR	47
L0250WR 45 L026 47 L0340AX 51 L0360GG 50 L0364LA00 50 L0380YX 48 L0380FX 48 L0430BB 44 L0430RR 44 L0430WR 47 L0440WR 47 L0450BB 44 L0450BB 44 L0450WG 47 L0450WG 44 L0450WG 44 L0450WG 44 L0450WG 44 L0450WG 47 L0510 51 L0514 51 L0520GW 49 L0540B450 53 L0540B450 53 L0540B450 53 L0540AA 49	L0250BB	45
L026 47 L0340AX 51 L0360GG 50 L0364LA00 50 L0380YX 48 L0380B 44 L0430BB 44 L0430RR 44 L0430WR 47 L0430WR 47 L0450BB 44 L0450WG 47 L0450BB 44 L0450WG 47 L0450WG 44 L0450WG 44 L0450WG 44 L0450WG 44 L0450WG 47 L0450WG 47 L0450WG 47 L0510 51 L0514 51 L0520GW 49 L0540B450 53 L0540B50 51 L0540C450 53 L0540C450 53 L0540X 49 L0540A 49 L0540A 49 L0540A 49 L0540A 49 L0540A 49	L0250RR	45
L0340AX 51 L0360GG 50 L0364LA00 50 L0380YX 48 L0380RX 48 L0430BB 44 L0430RR 44 L0430WR 44 L0430WR 44 L0440WR 47 L0450BB 44 L0450WG 47 L0460O_V00 47 L0460O_V00 47 L0510 51 L0514 51 L0520GW 49 L0540B450 53 L0540B450 53 L0540C450 53 L0540X 49 L0540A 49 L0580AA 49 L0540AA 49 <td>L0250WR</td> <td>45</td>	L0250WR	45
L0360GG 50 L0364LA00 50 L0380YX 48 L0380RX 48 L0430BB 44 L0430RR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0450BB 44 L0450BB 44 L0450WG 44 L0450WG 44 L0450WG 44 L0450WG 44 L0450WG 44 L0450WG 47 L0450WG 47 L0450WG 47 L0450WG 47 L0450WG 47 L0510 51 L0514 51 L0520GW 49 L0540B800 51 L0540B800 51 L0540C450 53 L0540YX 51 L0540AA 49 L0580AA 49 L0580AA 49	L026	47
L0364LA00 50 L0380YX 48 L0384RX 48 L0430BB 44 L0430RR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0450BB 44 L0450BB 44 L0450WG 47 L0450WG 47 L0450WG 47 L0450WG 47 L0510 51 L0514 51 L0520GW 49 L0540B800 51 L0540B450 53 L0540C450 53 L0540YX 51 L0580AA 49 L0580AA 49 L0580AA 49 L0300 50	L0340AX	51
L0380YX 48 L0380YX 48 L0384RX 48 L0430BB 44 L0430RR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0450BB 44 L0450BB 44 L0450BB 44 L0450WG 47 L0450WG 44 L0450WG 47 L0450WG 47 L0450Q 49 L0510 51 L0514 51 L0520GW 49 L0540B450 53 L0540B450 53 L0540C450 53 L0540AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0360GG	50
L0384RX 48 L0430BB 44 L0430KK 44 L0430RR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0450BB 44 L0450CO 44 L0450RR 44 L0450WG 44 L0450V00 47 L0468O 47 L0510 51 L0514 51 L0520GW 49 L0540B800 53 L0540B800 53 L0540C450 53 L0540AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0364LA00	50
L0430BB 44 L0430BB 44 L0430RR 44 L0430WR 44 L0430WR 44 L0430WR 44 L0450BB 44 L0450BB 44 L0450RR 44 L0450WG 44 L0450WG 44 L0450WG 44 L0450WG 44 L0450WG 44 L0450WG 47 L0510 51 L0514 51 L0520GW 49 L0540B800 53 L0540B800 51 L0540C450 53 L0540C450 53 L057AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0380YX	48
L0430KK 44 L0430RR 44 L0430WR 44 L0440WR 47 L0450BB 44 L0450BB 44 L0450CO 44 L0450WG 44 L0450WG 44 L0460CV00 47 L0468O 47 L0510 51 L0514 51 L0520GW 49 L0540B800 53 L0540C450 53 L0540XA 49 L0580AA 49 L3020 52 L3040GA00 50		48
L0430RR 44 L0430WR 44 L0440WR 47 L0450BB 44 L0450BB 44 L0450RR 44 L0450WG 44 L0450WG 44 L0450WG 44 L0450WG 47 L0460OV00 47 L0510 51 L0514 51 L0520GW 49 L0540B450 53 L0540B450 53 L0540B450 53 L0540B450 51 L0540X 51 L0540B800 51 L0540X 51 L0520A 49 L0580AA 49 L0300 52 L3040GA00 50	L0430BB	44
L0430WR 44 L0440WR 47 L0450BB 44 L0450BR 44 L0450OO 44 L0450WG 44 L0450WG 44 L0450WG 44 L0450WG 47 L0460OV00 47 L0468O 47 L0510 51 L0514 51 L0520GW 49 L0540B450 53 L0540B450 53 L0540C450 53 L0540AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0430KK	44
L0440WR 47 L0450BB 44 L0450OO 44 L0450RR 44 L0450WG 44 L0450WG 44 L0450WG 47 L0460OV00 47 L0468O 47 L0510 51 L0514 51 L0520GW 48 L0540B450 53 L0540B450 53 L0540C450 53 L0540AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0430RR	44
L0450BB 44 L0450OO 44 L0450RR 44 L0450WG 44 L0450WG 44 L0450OV00 47 L0468O 47 L0510 51 L0514 51 L0520GW 48 L0540B450 53 L0540B450 53 L0540C450 53 L0540X 51 L0540AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0430WR	44
L0450OO 44 L0450RR 44 L0450WG 44 L0450WG 47 L0450OV00 47 L0450O 47 L0450O 51 L0510 51 L0514 51 L0520GW 49 L0540B450 53 L0540B450 53 L0540C450 53 L0540C450 53 L0540AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0440WR	47
L0450RR 44 L0450WG 44 L0460OV00 47 L0468O 47 L0450 47 L0510 51 L0514 51 L0520GW 49 L0540B450 53 L0540B450 53 L0540C450 53 L0540YX 51 L0580AA 49 L3020 52 L3040GA00 50	L0450BB	44
L0450WG 44 L04600V00 47 L04680 47 L0510 51 L0514 51 L0520GW 49 L0540B450 53 L0540B450 53 L0540C450 53 L057AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0450OO	44
L04600V00 47 L04680 47 L0510 51 L0514 51 L0520GW 49 L0540B450 53 L0540B450 53 L0540C450 53 L0540C450 53 L057AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0450RR	44
L04680 47 L0510 51 L0514 51 L0520GW 49 L0524GW 48 L05408450 53 L05408450 53 L05402450 53 L05402450 53 L05407X 51 L0580AA 49 L3020 52 L3040GA00 50	L0450WG	44
L0510 51 L0514 51 L0520GW 49 L0524GW 48 L0540B450 53 L0540B800 51 L0540C450 53 L0540YX 51 L0580AA 49 L3020 52 L3040GA00 50	L04600V00	47
L0514 51 L0520GW 49 L0524GW 48 L0540B450 53 L0540B800 51 L0540C450 53 L0540YX 51 L057AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0468O	47
L0520GW 49 L0524GW 48 L0540B450 53 L0540BB00 51 L0540C450 53 L0540YX 51 L057AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0510	51
L0524GW 48 L0540B450 53 L0540B800 51 L0540C450 53 L0540YX 51 L057AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0514	51
L0540B450 53 L0540BB00 51 L0540C450 53 L0540YX 51 L057AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0520GW	49
L0540BB00 51 L0540C450 53 L0540YX 51 L057AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0524GW	48
L0540C450 53 L0540YX 51 L057AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0540B450	53
L0540YX 51 L057AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0540BB00	51
L057AA 49 L0580AA 49 L3020 52 L3040GA00 50	L0540C450	53
L0580AA 49 L3020 52 L3040GA00 50	L0540YX	51
L3020 52 L3040GA00 50	L057AA	49
L3040GA00 50	L0580AA	49
	L3020	52
L3044AG00 49	L3040GA00	50
	L3044AG00	49

L3050RY00	
	50
L3060CX	48
L9031YX10	54
L9991WB	133
M0000XSET	133
M0020X1	132
M0020X2	132
M0021XX	133
M0022XX	132
M0030X030	135
M0030X050	135
M0030X100	135
M0201XX00	91
MK006	134
P0010X030	164
P0010X050 P0019XX00	164
P0019200	10/
P00208B02	170
P0020BB03	170
P0020BB04	170
P0020BB05	170
P00208805	170
P0021BB00	170
P0021BB03	170
P0021BB04	170
P0021BB05	170
P0022XX00	169
P0023XX00	169
P0024XX00	168
P0025XX00	170
P0027WX00	171
P0028WE00	171
P0030XX00	169
P0031XX01	168
P000100/00	168
P0031XX02	168
P0033XX00	1/0
	168
P0033XX00	168
P0033XX00 P0033XX02	
P0033XX00 P0033XX02 P0038GBI0	165
P0033XX00 P0033XX02 P0038GBI0 P0038W150	165 164
P0033XX00 P0033XX02 P0038GBI0 P0038WI50 P0047XX01	165 164 164
P0033XX00 P0033XX02 P0038GBI0 P0038W150 P0047XX01 P0047XX02	165 164 164 164
P0033XX00 P0033XX02 P0038GBI0 P0038W150 P0047XX01 P0047XX02 P0048X400	165 164 164 164
P0033XX00 P0033XX02 P0038GBI0 P0038W150 P0047XX01 P0047XX02 P0048X400 P0054XX00	165 164 164 165 168
P0033XX00 P0033XX02 P0038GBI0 P0038WI50 P0047XX01 P0047XX02 P0048X400 P0054XX00 P99J00X	165 164 164 165 165 168
P0033XX00 P0033XX02 P0038GBI0 P0038W150 P0047XX01 P0047XX02 P0048X400 P0054XX00 P0054XX00 P99100X R0430BB	165 164 164 165 168 168 166 46
P0033XX00 P0033XX02 P0038GBI0 P0038WI50 P0047XX01 P0047XX02 P0048X400 P0054XX00 P0954XX00 P0954XX00 R0430BB R0430KK	165 164 164 165 168 168 166 46
P0033XX00 P0033XX02 P0038GBI0 P0038W150 P0047XX01 P0047XX02 P0048X400 P0054XX00 P99100X R0430BB R0430RR	165 164 164 165 168 166 46 46 46
P0033XX00 P0033XX02 P0038GBI0 P0038W150 P0047XX01 P0047XX02 P0047XX02 P0048X400 P0054XX00 P0054XX00 P99100X R0430BB R0430BB R0430RR R0430RR	165 164 164 165 168 166 46 46 46 46
P0033XX00 P0033XX02 P0038GBI0 P0038W150 P0047XX01 P0047XX02 P0047XX02 P0048X400 P0054XX00 P0054XX00 P99100X R0430BB R0430KK R0430RR R0430RR R0430WR R0450BB	165 164 164 165 168 166 46 46 46 46 46
P0033XX00 P0033XX02 P0038GBI0 P0038WI50 P0047XX01 P0047XX02 P0047XX02 P0048X400 P0054XX00 P0054XX00 P0054XX00 P09100X R0430BB R0430KK R0430RR R0430WR R0430WR R0450DO	165 164 164 165 168 166 46 46 46 46 46 46
P0033XX00 P0033XX02 P0038GBI0 P0038WI50 P0047XX01 P0047XX02 P0047XX02 P0048X400 P0054XX00 P0054XX00 P0054XX00 P0054XX00 R0430BB R0430KK R0430RR R0430WR R0430WR R0450BB R0450CO R0450RR	165 164 164 165 168 166 46 46 46 46 46 46 46
P0033XX00 P0033XX02 P0038GBI0 P0038WI50 P0047XX01 P0047XX02 P0047XX02 P0048X400 P0054XX00 P0054XX00 P0054XX00 P0054XX00 R0430BB R0430KK R0430RR R0430RR R0450BB R0450CO R0450RR R0450WG	165 164 164 165 168 166 46 46 46 46 46 46 46 46
P0033XX00 P0033XX02 P0038GBI0 P0038WI50 P0047XX01 P0047XX02 P0047XX02 P0048X400 P0054XX00 P0054XX00 P0054XX00 P0054XX00 P0054XX00 R0430BB R0430RR R0430RR R0430WR R0450BB R0450OC R0450RR R0450WG R0450WB	165 164 164 165 168 166 46 46 46 46 46 46 46 46 46
P0033XX00 P0038CBI0 P0038GBI0 P0038WI50 P0047XX01 P0047XX02 P0047XX02 P0048X400 P0054XX00 P0054XX00 P0054XX00 P0054XX00 P0054XX00 R0430BB R0430KK R0430WR R0430WR R0450BB R0450O R0450WG R0450WG R0460WB RK400BB	165 164 164 165 168 166 46 46 46 46 46 46 46 46 46 46 46 99
P0033XX00 P0038X002 P0038GBI0 P0038WI50 P0038WI50 P0047XX01 P0047XX02 P0054XX00 P0054X	165 164 164 165 168 166 46 46 46 46 46 46 46 46 46 46 46 99 102
P0033XX00 P0038X002 P0038K02 P0038GBI0 P0038W150 P0047XX01 P0047XX02 P0047XX	165 164 164 165 168 166 46 46 46 46 46 46 46 46 46 46 46 99 102 102
P0033XX00 P0033XX02 P0038GBI0 P0038WI50 P0047XX01 P0047XX02 P0047XX02 P0047XX02 P0047XX02 P0047XX02 P0047XX02 P0047XX02 P0047XX02 P0047XX00 P0047XX00 P0047XX00 R0430WR R0430WR R0430WR R0430WR R0430WR R0430WR R0430WR R0430WR R0430WR R0430WR R0450BB R0450WG R0450WG R0450WG R0450WG R0450WG R0450WG R0450WG R0450WB R1702XX10 R170	165 164 164 165 168 166 46 46 46 46 46 46 46 46 46 46 46 46 102 102 102 102
P0033XX00 P0033XX02 P0038GBI0 P0038WI50 P0047XX01 P0047XX02 P0047XX02 P0047XX02 P0047XX02 P0047XX02 P0047XX02 P0047XX02 P0047XX02 P0047XX02 P0047XX00 P0054XX00 P0054X	165 164 164 165 168 166 46 46 46 46 46 46 46 46 46 46 46 46 102 102 102

RK714BB00	98
RK715XX10	102
RK716XX10	102
RK716XX12	102
RK800BB00	97
RK800EE00	97
RK801BB00	96
RK801EE00	96
RK802BB00	96
RK802EE00	96
RK803BB00	97
RK804BX0L	94
RK804BX0R	94
RK805BX00	94
RK806BB00	97
RK807BX0L	94
RK807BX0P	94
RK808BB00	96
RK808OS00	96
RK809SO00	98
RK850X100	125
RK850X130	125
RK850X180	125
RK851XX03	125
RK851XX05	125
RK900PP00	54
SII00BY	95
S9000BB35	138
S9000BB50	138
S9000RR35	138
S9000RR50	138
S9000YY35	138
S9000YY50	138
S9001BX60	139
S900IYX40	139
S9003YB60	140
S9003YY40	140
W0003BY09	123
W0005BB09	36
W0005YBO9	36
W0008BS	142
W0010BB	31
W0010YB	31
W0022BB	31
W0052B010	142
W0052B012	142
W0059BR	22
W0063BB	17
W0064BB	17
W0068BB	23
W0068BR	23
W0071BB	23
W0071BY	23
W0073	26
W0074DR	21
W0075DB	30
W0075DR	30
W0076DB	30
W0076DR	30
W0078DR	13
W0079DR	12

205



W0080DR W0081DB	
W0081DB	13
	16
W0081DR	16
W0082DR	15
W0085BB00	94
W0086B0	21
W0087BY	22
W0089SY	25
W0090SY	25
W0091BY	19
W0092BB	27
W0093SY	24
W0096BB	20
W0097BB00	27
W0102YB00	28
W0103BB	17
W0104BB	17
W0105BR	34
W0108BR00	34
W0109RX00	34
W0110RX00	34
WOII2BY	18
W0200BB	33
W1001WW10	123
W1001WW15	123
W1001WW20	123
W1002WO20	123
W1002WS10	123
W1002WY15	123
W1010BB09	95
WI0IIWB02	100
WI0IIWB04	100
W1012WB02	100
W1012WB04	100
W1015B020	95
W1023	141
W1024BX	10.4
	126
W1025BX	126
W1025BX	126
W1025BX W1026BB	126 142
W1025BX W1026BB W1027B	126 142 55
W1025BX W1026BB W1027B W1028BY00	126 142 55 127
W1025BX W1026BB W1027B W1028BY00 W1029BX00	126 142 55 127 28
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1036W130	126 142 55 127 28 122
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1036W130 W1040R	126 142 55 127 28 122 119
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1036W130 W1040R W1041R	126 142 55 127 28 122 119 119
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1036W130 W1040R W1040R W1041R W1042R	126 142 55 127 28 122 119 119 119
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1036W130 W1040R W1041R W1041R W1042R W1047Y100	126 142 55 127 28 122 119 119 119 119
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1036W130 W1040R W1040R W1041R W1042R W1042R W1047Y100 W1051BX W1052XX00	126 142 55 127 28 122 119 119 119 119 122 127
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1036W130 W1040R W1040R W1041R W1042R W1042R W1047Y100 W1051BX W1051BX	126 142 55 127 28 122 119 119 119 119 122 127 123 127
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1036W130 W1040R W1040R W1041R W1042R W1047Y100 W1051BX W1054BR00 W1520X	126 142 55 127 28 122 119 119 119 122 127 123 127 112
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1036W130 W1040R W1041R W1042R W1047Y100 W1051BX W1054BR00 W1520X W1521X000	126 142 55 127 28 122 119 119 119 119 122 127 123 127 112
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1029BX00 W1040R W1040R W1041R W1042R W1047Y100 W1051BX W1054BR00 W1520X W1522	126 142 55 127 28 122 119 119 119 119 122 127 123 127 112 112 113
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1029BX00 W1040R W1040R W1041R W1042R W1047Y100 W1054BR00 W1054BR00 W1520X W1521X000 W1522 W2001	126 142 55 127 28 122 119 119 119 122 127 123 127 123 127 112 112 113 116
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1029BX00 W1040R W1040R W1041R W1042R W1047Y100 W1051BX W1052XX00 W1521X000 W1522 W2001 W2001	126 142 55 127 28 122 119 119 119 119 122 127 123 127 123 127 112 112 113 116 117
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1029BX00 W1040R W1040R W1041R W1042R W1047Y100 W1051BX W1054BR00 W1520X W1521X000 W1522 W2001 W2001*060	126 142 55 127 28 122 119 119 119 119 122 127 123 127 112 112 112 113 116 117
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1029BX00 W1029BX00 W1040R W1040R W1041R W1042R W1047Y100 W1051BX W1052X00 W1524BR00 W1520X W1522 W2001 W2001 W2001*060 W2001*080	126 142 55 127 28 122 119 119 119 119 122 127 123 127 123 127 112 112 113 116 116 116
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1029BX00 W1029BX00 W1040R W1040R W1041R W1042R W1047Y100 W1051BX W1052X00 W152X00 W1520X W1521X000 W1522 W2001 W2001 W2001*060 W2001*080 W2001*120	126 142 55 127 28 122 119 119 119 119 122 127 123 127 123 127 112 112 113 116 117 116 116 116
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1029BX00 W1029BX00 W1040R W1040R W1041R W1042R W1047Y100 W1051BX W1052X000 W152X000 W1521X000 W1522 W2001 W2001 W2001*060 W2001*080 W2001*120 W2001*150	126 142 55 127 28 122 119 119 119 119 122 127 123 127 123 127 112 112 112 112 113 116 116 116 116
W1025BX W1026BB W1027B W1028BY00 W1029BX00 W1029BX00 W1029BX00 W1040R W1040R W1041R W1042R W1047Y100 W1051BX W1052X00 W1521X000 W1522 W2001 W2001* W200**060 W200**080 W200**080	126 142 55 127 28 122 119 119 119 119 122 127 123 127 123 127 112 112 113 116 117 116 116 116

W2004*080	1
W2004*120	
W2004*150	1
W2005	1
W2005A080	1
W2005B060	1
W2005B080	1
W2005B120	1
W2005B150	1
W2005R120	1
W2005W150	1
W2005Y060	1
W2016*060	
W2016*080	
W2016*120	
W2016*150	
W2018A060	1
W2018Y030	1
W2020X080	
W2IIIY	1
W2112Y	1
W2113Y	1
W2114	
W2115	ĩ
W2116	
W2117	
W2200	
W2200*001	
W2200*002	
W2200*100	
W230	
W2300*060	
W2300*080	
W2300*120	
W2300*150	
W2301*060	
W2301*080	
W2301*120	
W2301*150	
W2303*060	
W2303*080	
W2303*120	
W2303*150	
W2601R085	
W2602Y085	
W2603YB00	
W2604RR00	
W2608	1
W2610	
W4100Y070	
W4100Y120	
W4100Y160	
W4400WW00	1
W4410W085	1
W4410W155	1
W4411W085	1
W4411W155	1
W4412W085	1
	۱
W4412W155	

W4420W085	129
W4420W155	129
W4421W085	129
W4421W155	129
W4422W085	129
W4422W155	129
W4423W085	129
W4423W155	129
W4430W155	129
W4433W155	129
W4440W155	129
W4441W155	129
W4442W155	129
W4450X085	129
W4450X155	129
W4452X085	129
W4452X155	129
W4453X085	129
W4453X155	129
W4460X085	129
W4460X155	129
W4462X085	129
W4462X155	129
W4463X085	129
W4463X155	129
W4470Y100	129
W447IY100	129
W4472Y100	129
W4474Y100	129
W4480X085 W4480X155	129
W4480X085	129
W4482X155	129
W4483X085	129
W4483X155	129
W4484X085	129
W4484X155	129
W8000BX00	145
W8100B	55
W8201BY00	36
W8211BY00	36
W8220	37
W9002XX17	140
W9002XX46	140
W9003RX45	140
W9004YX00	141
W9005YB00	139
W9500Y	145
W9601BB00	78
W9601QX00	78
W9601RX00	78
W9601WX00	78
W9601YX00	78
W9602RX00	78
W9603QX00	78
W9603RX00	78
W9604BX00	87
W9605TT00	85
W9605XX00	85
W9606SX00	87
W9607	76

W9607BX00	76
W9607MX00	76
W9607RX00	76
W9607WX00	76
W9607YX00	76
W9607ZX00	76
W9608SX00	87
W9801BY	149
W9802BY	153
W9803BY	149
W9804YX	28
W9805BX	155
W9806BX	154
X0004GB	53
X0004GB00	133
X0013XX02	133
X0014XX00	133

X0015XX00	133	X0069XXR3
X0016XX00	133	X0075XX14
X0017XX00	133	X0077XX00
X0018XX00	133	X4002XX00
X0020XX00	133	X4003XX00
X0021XX11	133	X4005XX00
X0022XX11	133	X4006XX00
X0023X200	133	X4007XX00
X0048XX25	86	X4008XX00
X0048XX29	86	X4009XX00
X0048XX31	86	X4010XX00
X0049XX00	84	X4011XX00
X0050XX00	84	X4012XX00
X0051XX00	84	X4013XX00
X0052XX00	84	X4014XX00
X0053XX00	84	X4015XX00
X0062XX00	86	

X0069XXR3	99
X0075XX14	103
X0077XX00	103
X4002XX00	111
X4003XX00	111
X4005XX00	108
X4006XX00	108
X4007XX00	108
X4008XX00	109
X4009XX00	109
X4010XX00	109
X4011XX00	109
X4012XX00	110
X4013XX00	110
X4014XX00	110
X4015XX00	110





Rock&Lock

Patented smart buckle used on SINGING ROCK hornesses and other products enables to lock and open very quickly.



Lody fit

Specially designed products for women.



Route 44

SINGING ROCK patented technology for rope production. A rope is produced on 44 carrier machine which provides great handling, low weight and durability.



Inter Core

The unique patented technology providing maximum safety even in case of a damaged sheath. The rope is made from 4 layers of parallel core filaments, braided core, braided intermediate sheath made from staple fibres and single tech sheath.



Single Tech

With the Single Tech system each strand is braided into the sheath separately. Single Tech sheath construction increases the rope's wear resistance and improves the rope's mechanical properties, such as flexibility.

Single rope

Marking of single dynamic rope for climbing and mountaineering used in single strand.

1/2

1

Half rope

Marking of half rope for mountaineering, multipitch and ice climbing, Individual strands of rope are used in alternation in the protection system. This system reduces the risk of rope breakage caused by falling stones, and provides maximum safety in alpine conditions and for difficult climbs.



Twinrope

Marking of twin ropes for mountaineering, multipitch and ice climbing. Pairs of the same type of rope are always used, sharing the same protection points. Twin ropes quarantee a high level of safety, especially for multipitch climbing in alpine conditions.

Stitched eye

sewn loop at the end of kernmentle low stretch rope used as a subsitute of a knot. Used mainly to attach ropes to anchor or attachment points.

UIAA

Products marked with this symbol meet strict UIAA safety requirements. The UIAA is the International Mountaineering and Climbing Federation. In most cases, UIAA requirements are sometimes stricter than EN standards.

ULAA Water repelent

A standard for water repellent ropes approved by the UIAA Safety Commission. To pass the test at a certified laboratory, the amount of absorbed water must not be greater than 5% of the rope's weight. For comparison, a non-treated rope absorbs around 50% of water in this test, and ropes labelled as "dry" but lacking adequate treatments can absorb between 20% and 40% of water.

CE Symbol of compliance

The CE symbol declares that the product is in compliance with the safety requirements of the applicable European standard. The number after the symbol CE(e.g. C€ 1019) identifies the relevant accredited testing lab.



American National Standards Institute - is a private non-profit organization that oversees the development of voluntary consensus standards for products, services, processes, systems, and personnel in the United States.[3] The organization also coordinates U.S. standards with international standards so that American products can be used worldwide.



NFPA

The National Fire Protection Association is a US nonprofit organization devoted to eliminating death, injury, property and economic loss due to fire, electrical and related hazards. It is widely known as an organization that creates and maintains standards and codes for usage and adoption by local governments.

ABS	
Aaryl	Acrylonitrile butadiene styrene is a common thermoplastic polymer. The most important mechanical properties of ABS are impact resistance and toughness. ABS is stronger than pure polystyrene. Lightweight, soft, and warm, with a wool-like feel fabrics or yarn. Strong and warm, acrylic fiber is often used for sweaters and tracksuits and as linings for boots and gloves, as well as in furnishing fabrics and
	carpets. It is manufactured as a filament, then cut into short staple lengths similar to wool hairs, and spun into yarm.
Anodizing	Electrolytic passivation process used to increase the thickness of the natural oxide layer on the surface of metal parts. Anodizing increases resistance to corrosion and wear, and provides better adhesion for paint primers and glues than bare metal does.
Bamboo	Cloth, yam, and clothing made out of bamboo fibres. Bamboo fabric is exceptionally soft and light. It is also incredibly hydrophilic, absorbing more water than other conventional fibres such as cotton and polyester.
Cold forging	Deformation of metal while it is below its recrystallization point. This process is usually less expensive than hot forging and the end product requires little, if any, finishing work. Residual stress of material may occur as it handles high stress and high die loads
Cardura	Brand name for a collection of fabrics used in a wide array of products including luggage, backpacks, trousers, military wear and performance apparel. Cordura fabrics are known for their durability and resistance to abrasions, tears and scuffs. Cordura fabrics are usually made of nylon.
Cortex	Polyamide ealstic woven fabrics. Cortex fabrics are designed to ensure the maximum ergonomy and comfort.
Dyneema	Registered trademark for a synthetic fabric that is stronger than Kevlar®. Dyneema® is composed of ultra high molecular weight polyethylene. It is resistant to water, most chemicals, UV radiation and bacterial.
ED coating	Electrophoretic deposition coating. A characteristic feature of this process is that colloidal particles suspended in a liquid medium migrate under the influence of an electric field (electrophoresis) and are deposited onto an electrode.
Elastane (Spandex)	Synthetic polyether-polyurea copolymer known for its exceptional elasticity. It is stronger and more durable than natural rubber.
EPS	Expanded polystyrene is a rigid and tough, closed-cell foam. It is made of pre-expanded polystyrene beads. Due to its technical properties such as low weight, rigidity, and formability, EPS can be used in a wide range of different applications.
Fiber glass	Type of fiber-reinforced plastic where the reinforcement fiber is specifically glass fiber. The glass fiber may be randomly arranged, flattened into a sheet (called a chopped strand mat), or woven into a fabric. Fiberglass is unique in its strength and yet it is lightweight. Although it is not as strong and stiff as composites based on carbon fiber, it is less brittle, and its raw materials are much cheaper.
Fleece	Soft napped insulating fabric made from a type of polyester called polyethylene terephthalate (PET) or other synthetic fibers. A lightweight, warm, soft and hydrofobic fabric. Regular polar fleece is not wind- proof and does not absorb moisture. It is readily generates static electricity.
G10 fiber	High-pressure fiberglass laminate, a kind of composite material. It is created by stacking multiple layers of glass cloth, soaking in epoxy resin, and compressing the resulting material under heat until the epoxy cures. GIO is favoured for its high strength, low moisture absorption, excellent electrical insulating properties and chemical resistance.
HF welding	Joining of materials by supplying High Frequency energy in the form of an electromagnetic field (27.12 MHz) and pressure to the material surfaces to be joined.
Hot forging	Deformation of metal while it is above the recrystallization point. Hot forging is recommended for the deformation of metal that features a high formability ratio. Hot forging provides a homorgenized grain structure
Injection	Manufacturing process for producing parts by injecting material into a mould. Material for the part is fed into a heated barrel, mixed, and forced into a mould cavity, where it cools and hardens to the configu- ration of the cavity.
Kemmantle rope	Rope constructed with its interior core protected by a woven exterior sheath designed to optimize strength, durability, and flexibility. The core fibers provide the tensile strength of the rope, while the sheath protects the core from abrasion during use.
Kevlar	Kevlar is the registered trademark for a para-aramid synthetic fiber. Kevlar has many applications, ranging from bicycle tires and racing sails to body armor, because of its high tensile strength-to-weight ratio by this measure it is 5 times stronger than steel. It is designed to protect users from cuts, abrasions and heat. Kevlar-based protective gear is often considerably lighter and thinner than equivalent gear made of more traditional materials.
Nylon	Generic designation for a family of synthetic polymers, based on aliphatic or semi-aromatic polyamides. Nylon is a thermoplastic silky material that can be melt-processed into fibers, films or shapes. Nylon is very much suitable for hosiery and the knitted fabrics because of its smoothness, light weight and high strength.
Polyamide (PA, PAD)	Macromolecule with repeating units linked by amide bonds. Synthetic polyamides are commonly used in textiles, automotive applications, carpets and sportswear due to their high durability and strength. Fibres are very tear-proof and abrasion-resistant and absorb little moisture (thus good transport of moisture away from the body) and are stretchy, crease-free, but also prone to pilling. Polyamide has the highest resistance of all textile raw materials (also when wet) and is very stretchy.
Polycarbonate	Group of thermoplastic polymers containing carbonate groups in their chemical structures. Polycarbonates used in engineering are strong, tough materials, and some grades are optically transparent.
Polyester (PES)	Category of polymers that contain the ester functional group in their main chain. Fabrics woven or knitted from polyester thread or yarn are used extensively in apparel and home furnishings. Industrial polyes ter fibers, yarns and ropes are used in car tire reinforcements, fabrics for conveyor belts, safety belts, coated fabrics and plastic reinforcements with high-energy absorption. Polyester has excellent return conduct thanks to the rippling property and is very light. Polyester also retains its shape and is colourfast, as well as resistant to sweat and UV-rays (lightfast). Polyester has a high melting point and transfers can therefore be printed on this material)
Polyethylene (PE)	Most common plastic, which is usually a mixture of similar polymers of ethylene. Polyethylene is of low strength, hardness and rigidity, but has a high ductility and impact strength as well as low friction. It shows strong creep under persistent force, which can be reduced by addition of short fibers. Its primary use is in packaging (plastic bags, plastic films, geomembranes, containers including bottles, etc.)
POLYMAR	Registered trademark for a polyester coated with polyurethane tarpaulin fabric. It is UV and weatherproof resistant.
Polypropylene (PP)	Thermoplastic polymer used in a wide variety of applications including packaging and labeling, textiles (e.g., ropes, thermal underwear and carpets), stationery, plastic parts and reusable containers of various types, laboratory equipment, loudspeakers, automotive components and polymer banknotes. An addition polymer made from the monomer propylene, it is rugged and unusually resistant to many chemical solvents, bases and acids. Polypropylene is the world's second-most widely produced synthetic plastic, after polyethylene.
Poly styrene	Synthetic aromatic polymer made from the monomer styrene. Polystyrene can be solid or foamed. General-purpose polystyrene is clear, hard, and rather brittle. Polystyrene is one of the most widely used plastics. Uses include protective packaging (such as packing peanuts and CD and DVD cases), containers (such as "clamshells"), lids, bottles, trays, tumblers, and disposable cutlery.
Poly vinyl chloride (PVC)	World's third-most widely produced synthetic plastic polymer, after polyethylene and polypropylene. PVC comes in two basic forms: rigid and flexible. The rigid form of PVC is used in construction for pipe and in profile applications such as doors and windows. It is also used for bottles, other non-food packaging, and cards (such as bank or membership cards). In flexible form, it is used in plumbing, electrical cable insulation, imitation leather, signage, phonograph records, inflatable products, and many applications where it replaces rubber.
Poly urethane (PU)	Polymer composed of organic units joined by carbamate (urethane) links. While most polyurethanes are thermosetting polymers that do not melt when heated, thermoplastic polyurethanes are also available.
Ripstop	Woven fabrics, using a special reinforcing technique that makes them resistant to tearing and ripping. During weaving, (thick) reinforcement threads are intervoven at regular intervals in a crosshatch pattern. Advantages of ripstop are the favourable strength-to-weight ratio and that small tears can not easily spread.
Stainless Steel	Steel alloy with a minimum of 10.5% chromium content by mass. Stainless steel is notable for its corrosion resistance. Stainless steel does not readily corrode, rust or stain with water as ordinary steel does. However, it is not fully stain-proof in low-oxygen, high-salinity, or poor air-circulation environments.
Technora	Registered trademark for an aramid that is useful for a variety of applications that require high strength or chemical resistance. It is closely related to Kevlar (see Kevlar).
Thermolite	Synthetic material made by Invista and used as an insulator. The performance fibers are engineered with a differentiated fiber shape, able to produce battings with sought-after lightweight warmth.
Thermotransfer	Digital printing process in which material is applied to paper (or some other material) by melting a coating of ribbon so that it stays glued to the material on which the print is applied.
Ultrasonic finishing	Sound waves with frequencies higher than the upper audible limit of human hearing is joining the load-bearing core and the protective sheath into a compact unit. It is used to finish kernmantle ropes ends.
Velcro	Registered trademark for a hook-and-loop fastener, which consists of two components: typically, two lineal fabric strips (or, alternatively, round "dots" or squares) which are attached (sewn or otherwise adhered) to the opposing surfaces to be fastened.
Zinc plating	Prevents oxidation of the protected metal by forming a barrier and by acting as a sacrificial anode if this barrier is damaged.

STANDARDS The list of EN and US standards for persona protective equipment (PPE) against falls from a height

EN 566

EN 567

devices.

EN BT3

homesses.

EN 892

(strech) ropes.

EN 959

Mountaineering equipment - Slings

Mountaineering equipment. Rope clamps

EN 795, EN 795 /AT

PPE against falls from a height. Sit

Mountaineering equipment. Dynamic

PPE against falls from a height. Anchor



20 341 PPE against falls from height. Descender devices for rescue.



EN 353-1, 2 PPE against falls from a height. Guided type fall arresters.



EN 354 PPE against falls from a height. Connecting equipment max length 2 m (incl. connectors).



EN 355 PPE against falls from a height. Energy



PPE for work positoning and prevention of falls from a height. Work positioning systems.



06E M3 PPE against falls from a height. Retractable type fall arresters.

PPE against falls from a height.

Protection gloves against mechanical risks

PPE against falls from a height. Industrial

EN 361

harnesses.

EN 362

Connectors.

EN 388

EN 397

safety helmets.

EN 564

cords



EN 1496 Rescue equipment. Rescue lifting devices.

Mountaineering equipment - Rock anchors


EN 1497 Rescue equipment. Rescue harnesses.





defined by NFPA 1983 as being designed to fit around the waist and thighs or under the buttocks and may be utilized for a maximum of a two-person load

NFPA Class III





EN 12277 Mountaineering equipment - Harnesses

Mountaineering equipment - Connectors

EN 12275



EN 12278 Mountaineering equipment. Pulleys.

EN 12492 Mountaineering equipment - Helmets for mountaineers



EN 128.41 PPE against falls from a height. Descender device for rope access system and rope adjustment devices.




EN 15151 Mountaineering equipment - Braking devices




Safety Requirements for Personal Fall Arrest Systems, Subsystems and Components

ANSI 2359/





NEPA Close II





NFPA

EN 1608 Safety requirements for suspended access

EN 1591

equipment





PPE against falls from a height. Low stretch kernmantel ropes.

EN 1478 Personal fall protection equipment - Rescue loops





absorbers. EN:358

THAT'S SINGING ROCK

Our company is located in the Czech Republic, in the heart of Europe. Our headquarter is near Krkonoše National Park and Bohemian Paradise where the amazing and unique sandstone rock climbing areas are situated. Most of our staff are climbers or workers at height, alpinists or backcountry skiers. All of us love the vertical playground. The great group of people who create the true SINGING ROCK culture is the priceless benefit for most of us who work at the company. We develop and manufacture gear for the vertical world as if it were for us. Most of the manufacturing is handmade and so thousands of finished products or their parts pass through our hands. Over the course of 30 years of SINGING ROCK, many people have taken turns at the machines and computers but some of them have been here almost from the beginning.

We are climbers who work for climbers

















Warning:

Activities at height such as climbing, via ferrata, caving, rappelling, ski-touring, rescue, work at height and exploration are dangerous activities, which may lead to severe injury or even death. Thus the following is essential before use: careful reading and understanding of the instructions for use acquaintance with the possibilities and limitations of the product adequate apprenticeship in appropriate techniques and methods of use understanding and acceptance of the risk involved. In case of doubt or problem of understanding, contact SINGING ROCK.

Social:

Address:	
Singing Rock	
Poniklá 317	e-m
512 42 Poniklá	
Czech Republic	

Contact: tel.: +420 481 585 007 nail: info@singingrock.com www.singingrock.com

f singingrock.page
 singingrock_official
 user/sigrvideo

Catalogue PROFESSIONAL SINGING ROCK 2024/25 - PPE equipment

Published by: SINGING ROCK s.r.o. • Copyright © SINGING ROCK s.r.o. All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of the publisher, except in the case of brief quotations embodied in critical reviews and certain other noncommercial uses permitted by copyright law. Technical specifications may change without notice.





ø

-

PŠ